

PLOT DATE: Aug 15, 2011

2007 CBC
STANDARD
PARTITION WALL
DETAILS

ISSUE DATE:	08/15/11
REVISION:	DATE:

PLOT DATE: Aug 15, 2011

DRAWING INDEX

REVISIONS

- STX DRAWING INDEX, NARRATIVE AND FLOWCHART
- STX.00 DRAWING INDEX
- STX.01 DRAWING INDEX (CONTINUED)
- STX.02 NARRATIVE - PAGE 1 OF 4
- STX.03 NARRATIVE - PAGE 2 OF 4
- STX.04 NARRATIVE - PAGE 3 OF 4
- STX.05 NARRATIVE - PAGE 4 OF 4
- STX.06 FLOWCHART - OVERVIEW OF OPD USE
- STX.07 FLOWCHART - PARTITION WALLS
- STX.08 FLOWCHART - PARTITION WALL OPENINGS
- STX.09 FLOWCHART - PARTITION WALL TOP CONNECTION
- STX.10 FLOWCHART - PARTITION WALL BOTTOM CONNECTION
- STX.11 FLOWCHART - SOFFIT
- ST0 GENERAL NOTES
- ST0.00 GENERAL NOTES - PAGE 1 OF 3
- ST0.01 GENERAL NOTES - PAGE 2 OF 3
- ST0.02 GENERAL NOTES - PAGE 3 OF 3
- ST1 STUD FRAMING AND CONNECTIONS
- ST1.00 METAL STUD PROFILES
- ST1.01 POWER ACTUATED FASTENER (PAF) GENERAL NOTES (INSTALLED IN CONCRETE FILLED METAL DECK OR CONC SLAB)
- ST1.02 POWER ACTUATED FASTENER (PAF) ALLOWABLE STRENGTHS (INSTALLED IN CONCRETE FILLED METAL DECK OR CONC SLAB)
- ST1.03 EXPANSION ANCHOR GENERAL NOTES
- ST1.04 EXPANSION ANCHOR ALLOWABLE STRENGTHS
- ST1.05 POWER ACTUATED FASTENER (PAF) GENERAL NOTES AND ALLOWABLE STRENGTHS (INSTALLED IN STEEL)
- ST1.06 SHEET METAL SCREW GENERAL NOTES
- ST1.07 SHEET METAL SCREW ALLOWABLE STRENGTHS
- ST1.08 SHEET METAL SCREW ALLOWABLE STRENGTHS (CONTINUED)
- ST1.09 SCREW ANCHOR GENERAL NOTES
- ST1.10 SCREW ANCHOR ALLOWABLE STRENGTHS
- ST2 PARTITION WALL SECTIONS AND ELEVATIONS
- ST2.00 TYPICAL PARTITION WALL CONDITIONS
- ST2.01 PARTITION WALL SCHEDULES
- ST2.02 TYPICAL PARTITION WALL SECTION
- ST2.03 CABINET OR EQUIPMENT ANCHORAGE TO PARTITION WALL, CONDITION 'B'
- ST2.04 CABINET OR EQUIPMENT ANCHORAGE TO PARTITION WALL, CONDITIONS 'C' & 'D'
- ST2.05 STUD FURRING ON CONCRETE OR CONCRETE BLOCK WALL
- ST2.06 PARTITION WALL ELEVATION - FULL HEIGHT & PARTIAL HEIGHT PARTITION WALLS
- ST2.07 PARTITION WALL ELEVATION - FRAMING AT OVERLAPPING OPENINGS
- ST3 PARTITION WALL FRAMING DETAILS
- ST3.00 PARTITION WALL OPENING FRAMING SCHEDULE (4'-0" MAX OPENING WIDTH)
- ST3.01 PARTITION WALL OPENING FRAMING SCHEDULE (OPENING WIDTH 4'-0" TO 10'-0" MAX)
- ST3.02 HEADER SECTION
- ST3.03 SILL SECTION
- ST3.04 JAMB STUD DETAILS
- ST3.05 HEADER AND SILL CONNECTION TO JAMB STUDS (4'-0" MAX OPENING WIDTH)
- ST3.06 HEADER AND SILL CONNECTION TO JAMB STUDS (OPENING WIDTH BETWEEN 4'-0" TO 10'-0" MAX)
- ST4 PARTITION WALL BRACING / BRIDGING DETAILS
- ST4.00 METAL STUD LATERAL BRACING TYPE 1
- ST4.01 METAL STUD LATERAL BRACING TYPE 2
- ST5 BACKING DETAILS
- ST5.00 BACKING PLATE DETAIL TYPE 1
- ST5.01 BACKING PLATE DETAIL TYPE 2
- ST5.02 BASE CABINET OR EQUIPMENT ANCHORAGE
CONTINUED ON ST0.01



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

DRAWING INDEX

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.00

PLOT DATE: Aug 15, 2011

DRAWING INDEX (CONTINUED)

REVISIONS

- ST6 PARTIAL HEIGHT PARTITION WALL TOP TRACK CONNECTION DETAILS**
- ST6.00 TOP CONNECTION CONDITIONS - PARTIAL HEIGHT PARTITION WALL
 - ST6.01 PARTIAL HEIGHT PARTITION WALL BRACE SPACING, SIZE & CONNECTION SCHEDULES
 - ST6.02 PARTIAL HEIGHT PARTITION WALL TOP BRACING - PARTITION WALL CONDITIONS 'A' & 'B'
 - ST6.03 PARTIAL HEIGHT PARTITION WALL TOP BRACING - PARTITION WALL CONDITIONS 'C' & 'D'
 - ST6.04 BRACE CONNECTION TO CONCRETE FILLED METAL DECK - ALL PARTITION WALL CONDITIONS
 - ST6.05 BRACE CONNECTION TO CONCRETE SLAB OR BEAM SOFFIT - ALL PARTITION WALL CONDITIONS
 - ST6.06 BRACE CONNECTION TO CONCRETE PAN JOIST OR WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS
 - ST6.07 BRACE CONNECTION TO METAL ROOF DECK WITHOUT STRUCTURAL CONCRETE FILL - PARTITION WALL CONDITIONS 'A' & 'B'
 - ST6.08 BRACE CONNECTION TO STEEL BEAM - PARTITION WALL CONDITIONS 'A' & 'B'
 - ST6.09 BRACE CONNECTION TO STEEL BEAM - PARTITION WALL CONDITIONS 'C' & 'D'
 - ST6.10 BRACE CONNECTION TO WOOD FRAMING - ALL PARTITION WALL CONDITIONS
 - ST6.11 TOP & BOTTOM CONNECTION DEMAND SCHEDULE
- ST7 FULL HEIGHT PARTITION WALL TOP TRACK CONNECTION DETAILS**
- ST7.00 TOP CONNECTION CONDITIONS - FULL HEIGHT PARTITION WALL
 - ST7.01 TYPICAL TOP TRACK ANCHORAGE - ALL PARTITION WALL CONDITIONS
 - ST7.02 TOP TRACK CONNECTION LWC TO FILLED METAL DECK & NWC SLAB - ALL PARTITION WALL CONDITIONS
 - ST7.03 TOP TRACK CONNECTION LWC TO FILLED METAL DECK & NWC SLAB W/ FIREPROOFING - ALL PARTITION WALL CONDITIONS
 - ST7.04 TOP TRACK CONNECTION LWC TO FILLED METAL DECK & NWC SLAB FASTENER SPACING SCHEDULES
 - ST7.05 TOP TRACK CONNECTION TO CONCRETE PAN JOIST & WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS
 - ST7.06 TOP TRACK CONNECTION TO CONCRETE PAN JOIST & WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS
 - ST7.07 TOP TRACK CONNECTION TO METAL ROOF DECK WITHOUT CONCRETE FILL - ALL PARTITION WALL CONDITIONS
 - ST7.08 TOP TRACK CONNECTION TO STEEL BEAM - ALL PARTITION WALL CONDITIONS
 - ST7.09 TOP TRACK CONNECTION TO WOOD FRAMING - ALL PARTITION WALL CONDITIONS
 - ST7.10 TOP TRACK CONNECTION AT JAMB LOCATIONS - PARTITION WALL CONDITION 'A'
- ST8 BOTTOM TRACK CONNECTION DETAILS**
- ST8.00 BOTTOM CONNECTION SCHEDULE
 - ST8.01 BOTTOM TRACK CONNECTION TO LWC ON METAL DECK OR NWC SLAB - ALL PARTITION WALL CONDITIONS
 - ST8.02 BOTTOM TRACK CONNECTION TO LWC ON METAL DECK FASTENER MAX SPACING SCHEDULE
 - ST8.03 BOTTOM TRACK CONNECTION TO NWC SLAB FASTENER MAX SPACING SCHEDULE
 - ST8.04 BOTTOM TRACK CONNECTION TO WOOD FRAMING - ALL PARTITION WALL CONDITIONS
 - ST8.05 BOTTOM TRACK CONNECTION AT JAMBS - PARTITION WALL CONDITION 'A'
- ST9 SUSPENDED SOFFIT DETAILS**
- ST9.00 SUSPENDED SOFFIT CONNECTION SCHEDULE
 - ST9.01 SUSPENDED SOFFIT DETAIL
 - ST9.02 SUSPENDED SOFFIT CONNECTION TO CONCRETE SLAB, CONC. BEAM OR LWC FILLED METAL DECK
 - ST9.03 SUSPENDED SOFFIT CONNECTION TO STEEL BEAM



AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

SHEET TITLE:
DRAWING INDEX (CONTINUED)

ISSUE DATE: **08/15/11**
REVISION: DATE:

OPD NO.:

STX.01

PLOT DATE: Aug 16, 2011

NARRATIVE

2007 California Building Code (2007 CBC) Standard Partition Wall Details document contains OSHPD Pre-Approved Details (OPD), which may be incorporated into construction documents. These details have been reviewed for compliance with the 2007 CBC and, when used as shown, without modifications, are deemed to comply with code. They are intended to cover common conditions that occur on many projects. It is anticipated that use of these details will facilitate the design, review, and construction process.

The Narrative and supporting Flowchart, which follows the Narrative, are provided to assist in selecting applicable details from the OPD for incorporation into the construction documents. It is to be used only as a guide and does not provide complete step-by-step instructions for use of the OPD. Narrative comment numbers correspond to the numbered items on the Flowchart.

The following steps apply to use of OPD:

1. Define Project Parameters

- A. Short Period Spectral Response Acceleration (S_{DS}) for project site.
 - i. The (S_{DS}) identified for use with the OPD shall not be lower than the S_{DS} documented in the project General Notes and/or Specifications.
- B. Type of construction.
 - i. The Registered Design Professional (RDP) in responsible charge shall identify the floor and/or roof framing materials which apply to the use of the OPD under consideration (e.g. wood, concrete, metal deck).
- C. Project specific geometry and other conditions.
 - i. The RDP in responsible charge shall identify the geometry which applies to the use of the OPD under consideration (e.g. floor-to-floor height, wall thickness).
 - ii. The RDP in responsible charge shall identify other unique conditions which apply to the use of the OPD under consideration (e.g. mechanical duct conflicts, door openings in partition walls, partial-height vs full-height partition walls, attachments suspended from partition walls).

2. Verify Applicability of OPD

Refer to PIN 51.

OPD allow design professionals to incorporate pre-approved details into their construction documents. Projects that utilize OPD shall satisfy the following conditions.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

NARRATIVE - PAGE 1 OF 4

ISSUE DATE: 08/15/11

REVISION:

DATE:

OPD NO.:

STX.02

- A. The RDP in responsible charge shall verify the applicability of the OPD for their specific project conditions. For example, when designing a fire-rated corridor, use of partition wall framing OPD are acceptable provided the OPD are compatible with the construction requirements for the fire rated wall assembly.
- B. The details must be directly applicable to the project conditions. For example, OPD for attachment of a soffit suspended below a steel deck with concrete fill are not applicable to wood frame construction.
- C. Substitutions of items shown in the OPD are not permitted, unless specifically allowed by the OPD. For example, a power-actuated fastener (PAF) may not be substituted in a connection detail that specifies an expansion anchor, unless the OPD specifically permits it. Use of post-installed anchors from different manufacturers is permitted, provided the substituted anchors meet the installation criteria and Allowable Strengths as specified in the OPD.
- D. Changes to the OPD to accommodate project conditions are not permitted. In such cases, project specific details are required.

3. Select Appropriate Details from OPD

Review OPD General Notes before the start of OPD selection process.

- A. For partition wall design, begin at ST2.00.
- B. Enter ST2.01 with partition wall height, condition and S_{DS} value to select metal stud size.
- C. The following framing components are covered by the OPD:
Furring, attachment anchorage to the partition walls, framing of openings (3.D), lateral in-plane bracing of the partition walls, partition wall top and bottom connections to structure (3.E). See flowchart for corresponding detail numbers.
- D. Framing of openings.
 - i. Select opening framing members per ST3.00 or ST3.01 based upon opening width per ST2.06.
 - ii. Apply the information found in these schedules to select appropriate framing details.
 - 1) Header detail ST3.02 provides a choice of screw or welded connections.
 - 2) Sill detail ST3.03 provides a choice of screw or welded connections.
 - 3) Jamb detail ST3.04 provides a choice of screw or welded connections.
 - a) See ST2.06 and ST7.10 for top track connection at jambs.
 - b) See ST8.05 for fasteners for bottom connection at jambs based on opening size and the substrate below.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

NARRATIVE - PAGE 2 OF 4

ISSUE DATE: 08/15/11

REVISION:

DATE:

OPD NO.:

STX.03

PLOT DATE: Aug 16, 2011

- 4) Depending upon the opening width, use header and sill connection to jamb per ST3.05 or ST3.06, both of which provide options for bent web or gage plate connections.
- E. Partition wall connection to structure.
 - i. Partition wall top connection design.
 - 1) For partial height partition top connection, brace design begins at ST6.00.
 - a) For brace spacing size and connections at either end of the brace, enter schedule on ST6.01 with S_{DS} and partition wall condition information. Determine maximum allowable brace spacing based on the chosen brace size (stud width and thickness).
 - b) For brace configuration and components, see ST6.02 and ST6.03.
 - c) Brace connection to the structure above is specific to the construction type (e.g. substrate for fastener placement). See ST6.04 through ST6.10.
 - d) Select appropriate fastener.
 - e) For fasteners installed in concrete or steel choose qualified fastener manufacturer based on fastener installation criteria and Allowable Strength as specified in the OPD as well as criteria specified in the General Notes.
 - f) For fasteners installed in wood, use fasteners per NDS for Wood Construction.
 - 2) For full height partition wall, top connection design begins at ST7.00.
 - a) For nested and vertically slotted track configurations, see ST7.01.
 - b) Top track connection to the structure above is specific to the construction type (e.g. substrate for fastener placement). See ST7.02 through ST7.10.
 - c) See 3.E.i.1)d) for further steps.
 - ii. For partition wall bottom connection, design begins at ST8.00.
 - 1) For connection to concrete, see ST8.01.
 - a) To select fastener type, size, embed and spacing for connection to LWC filled metal deck or NWC slab, enter schedule on ST8.02 or ST8.03 with partition wall condition, height and S_{DS} information.
 - 2) For connection to wood, see ST8.04.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

NARRATIVE - PAGE 3 OF 4

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.04

PLOT DATE: Aug 16, 2011

F. For Soffit design, begin at ST9.00.

- i. See soffit framing on ST9.01 for framing elements specific to S_{D5} level and soffit lateral brace length.
- ii. Depending on the substrate, use ST9.02 or ST9.03 for the soffit connection to the structure above.
 - 1) Choose qualified manufacturer based on fastener installation criteria and Allowable Strengths as specified in the OPD as well as criteria specified in the General Notes. See ST1.03 and ST1.04 in addition to OPD General Notes.

4. Implementation and Use of OPD During Plan Review

Refer to PIN 51.

5. Implementation and Use of OPD During Construction Process

Refer to PIN 51.

- A. During construction, OPD are treated as any other detail in the approved documents.
- B. If during the course of construction, it is necessary to modify an OPD or project specific detail to accommodate existing conditions and there is an alternate OPD that will work for the condition and is appropriate for use, substitution of OPD for the existing detail does not materially alter the work, for the purposes of submitting an Amended Construction Document.
- C. Changing the scope of a project (adding additional partition walls, for example) does constitute a material alteration to the project, even if OPD can be used for all conditions. In such a case, an Amended Construction Document must be submitted to OSHPD field staff for review.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

NARRATIVE - PAGE 4 OF 4


ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.05

PLOT DATE: Aug 16, 2011

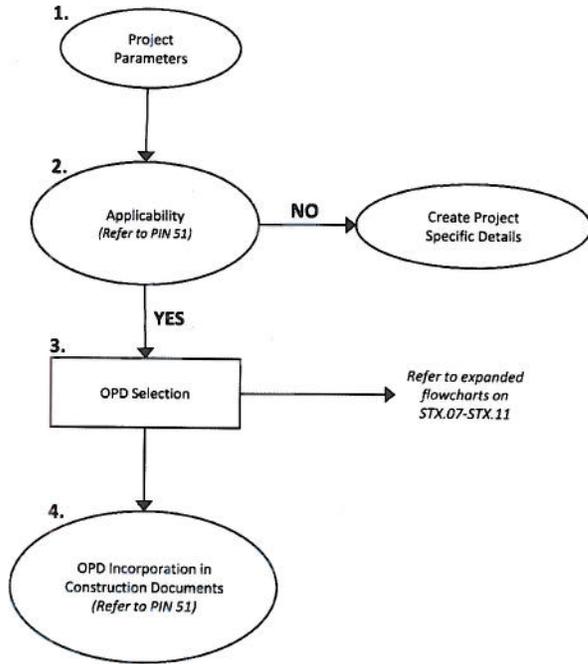

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

FLOWCHART – OVERVIEW OF OPD USE


ISSUE DATE: 08/15/11

REVISION:

DATE:

OPD NO.:

STX.06

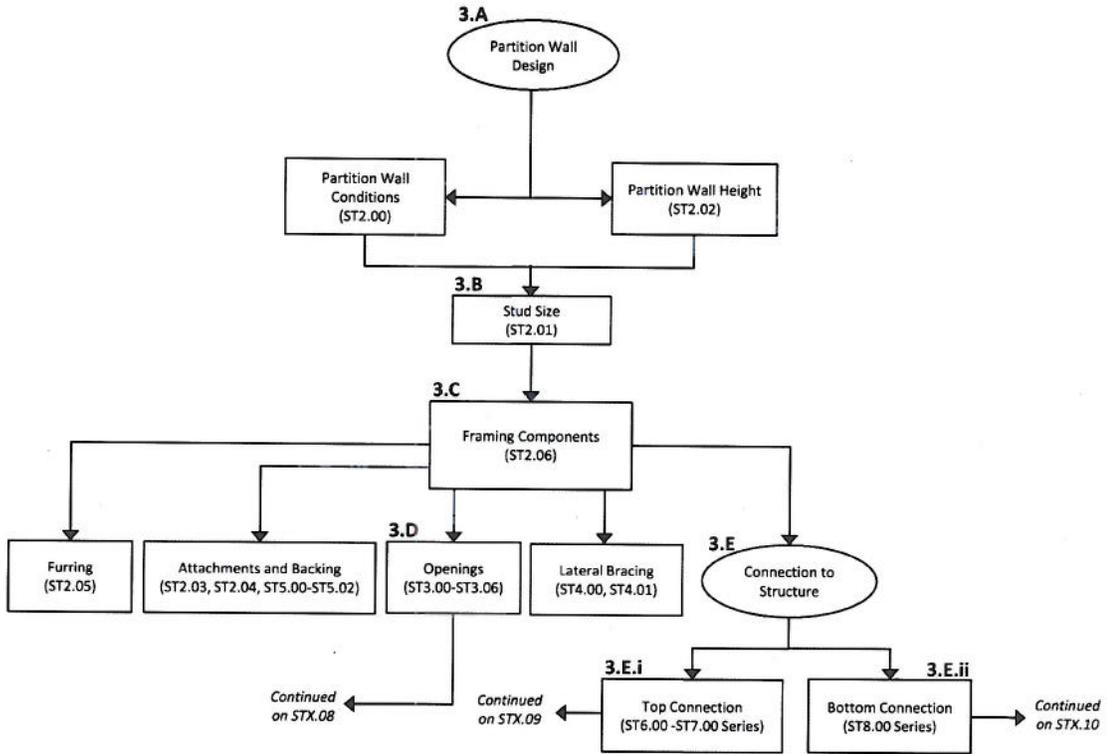

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS


SHEET TITLE:
FLOWCHART - PARTITION WALLS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.07

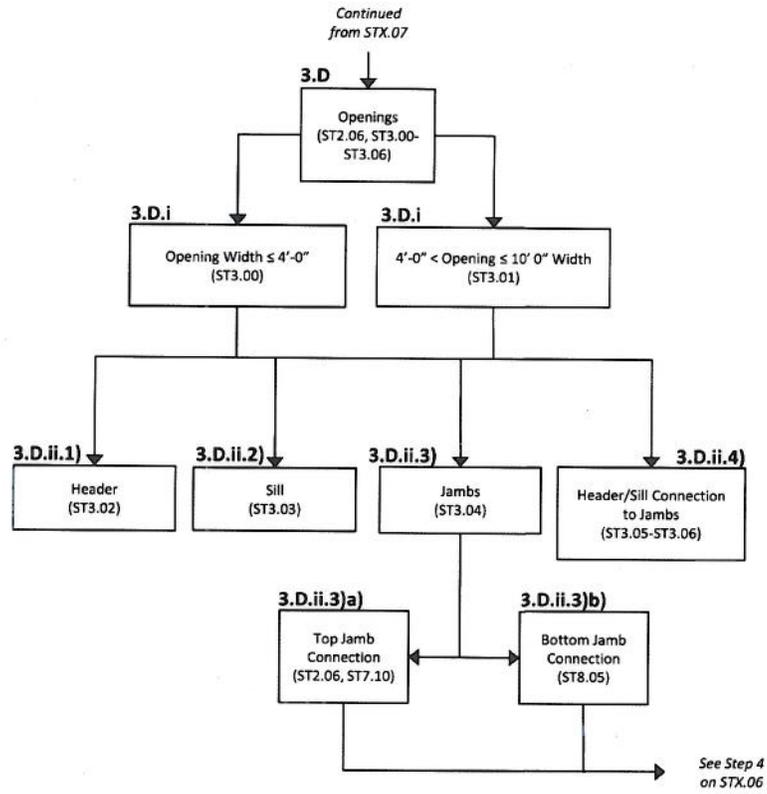

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:


FLOWCHART – PARTITION WALL OPENINGS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.08

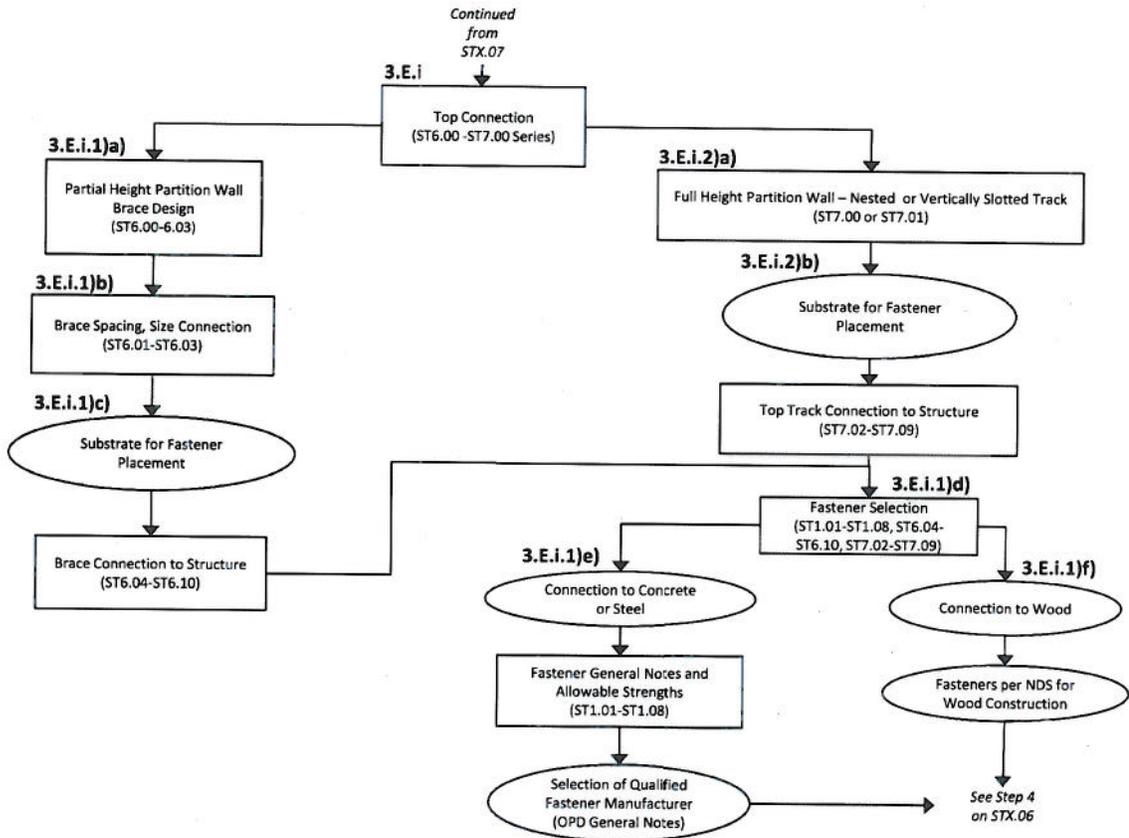

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:


FLOWCHART – PARTITION WALL
TOP CONNECTION

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.09

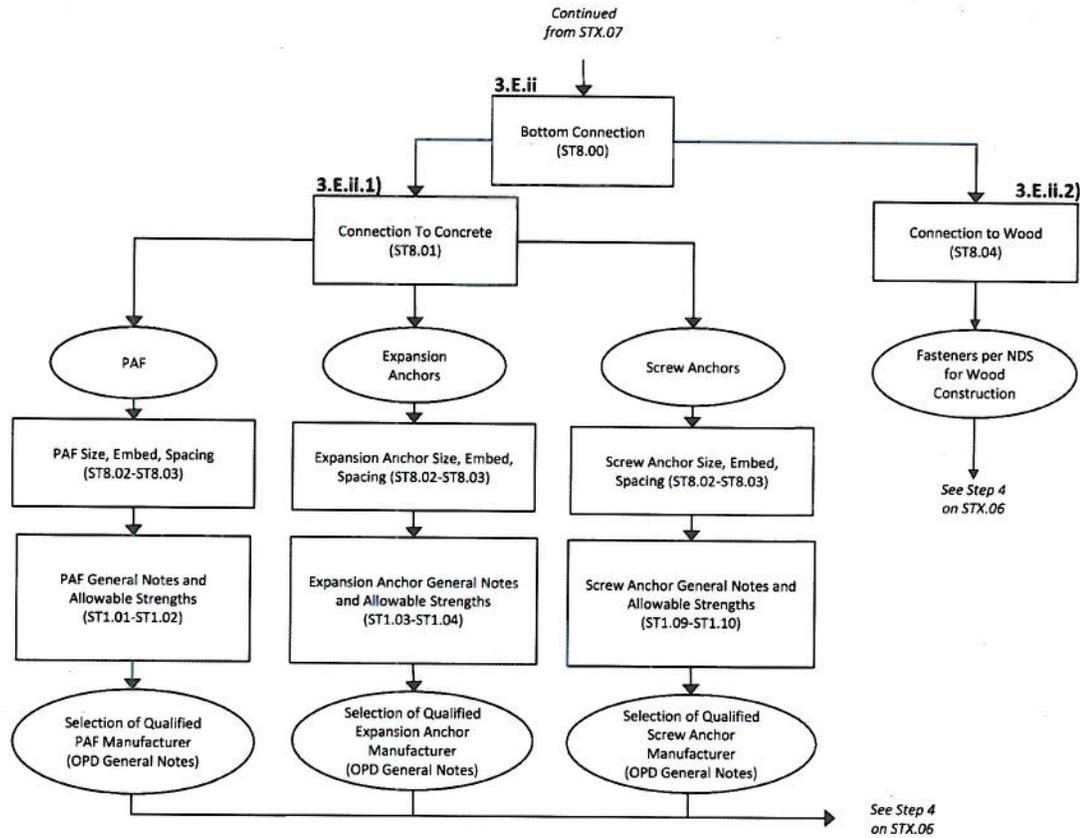

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

FLOWCHART - PARTITION WALL
BOTTOM CONNECTION


ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.10

PLOT DATE: Aug 16, 2011

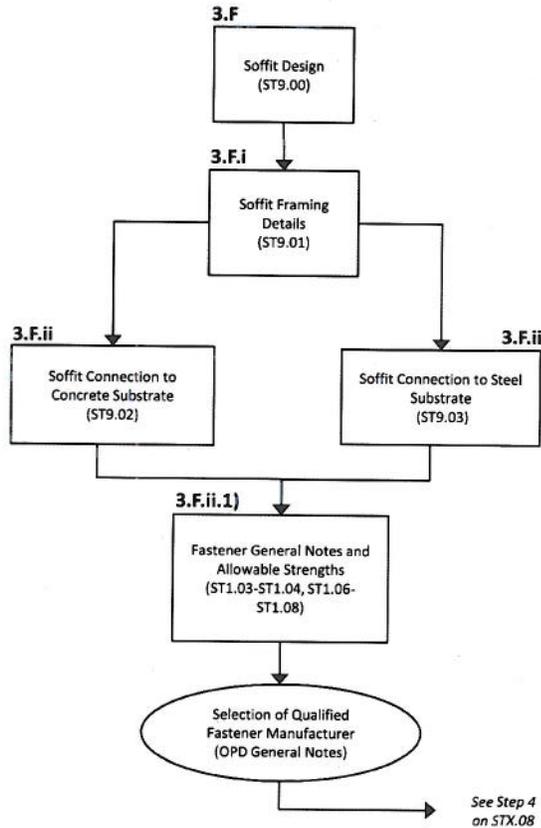


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

FLOWCHART - SOFFIT

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

STX.11

PLOT DATE: Aug 16, 2011

GENERAL NOTES

1. CONSTRUCTION, WORKMANSHIP AND MATERIALS SHALL CONFORM TO THE 2007 CALIFORNIA BUILDING STANDARDS CODE (2007 CBSC), CALIFORNIA CODE OF REGULATIONS, TITLE 24, AND ASCE 7-05.
2. THE CONTRACTOR SHALL NOTIFY OSHPD AND THE REGISTERED DESIGN PROFESSIONAL (RDP) IN RESPONSIBLE CHARGE WHERE A CONFLICT OR DISCREPANCY OCCURS BETWEEN THE OSHPD PRE-APPROVED DETAILS (OPD) AND ANY OTHER PORTION OF THE CONSTRUCTION DOCUMENTS, FIELD CONDITIONS OR WHERE ANY CONDITIONS ARISE NOT COVERED BY THESE DOCUMENTS WHEREIN WORK WILL NOT COMPLY WITH THE REQUIREMENTS OF THE 2007 CBSC, CALIFORNIA CODE OF REGULATIONS, TITLE 24.
3. THE INTENT OF THE OPD IS TO CONSTRUCT THE HOSPITAL BUILDING IN ACCORDANCE WITH THE 2007 CBSC, CALIFORNIA CODE OF REGULATIONS, TITLE 24. SHOULD ANY CONDITION DEVELOP NOT COVERED BY THE APPROVED PLANS AND SPECIFICATIONS WHEREIN THE WORK WILL NOT COMPLY WITH THE 2007 CBSC, A CHANGE ORDER DETAILING AND SPECIFYING THE REQUIRED WORK SHALL BE SUBMITTED TO AND APPROVED BY OSHPD BEFORE PROCEEDING WITH THE WORK.
4. GALVANIZED METAL STUDS, TRACKS AND SHEET STEEL SHALL CONFORM TO ASTM A653 MATERIAL, OR OTHER EQUIVALENT ASTM LISTED MATERIALS IN SECTION A2.1 OF THE 2001 AISI NORTH AMERICAN SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS, INCLUDING 2004 SUPPLEMENT (2001 AISI NASPEC), WITH A MINIMUM YIELD STRENGTH OF 33 KSI FOR 43 MIL (18 GAGE) AND LIGHTER AND MINIMUM YIELD STRENGTH OF 50 KSI FOR HEAVIER GAGES.
5. METAL STUDS AND TRACKS SHALL BE OF SIZE, THICKNESS AND SECTION PROPERTIES SHOWN ON TABLES I-1 AND I-2 OF THE 2001 AISI NASPEC. THE RDP IN RESPONSIBLE CHARGE SHALL OBTAIN OSHPD APPROVAL FOR ANY SUBSTITUTIONS.
6. THESE OPD REFER TO FASTENER TYPE AND SIZE BUT DO NOT SPECIFY OR ENDORSE A SPECIFIC MANUFACTURER. THE RDP IN RESPONSIBLE CHARGE SHALL SELECT A MANUFACTURER, AND SELECTED FASTENER CAPACITIES SHALL MATCH OR EXCEED THE ALLOWABLE STRENGTHS LISTED HEREIN. THE FOLLOWING REQUIREMENTS SHALL ALSO BE MET:
 - A. SHEET METAL SCREWS SHALL COMPLY WITH ASTM C 1513-04, ASME B18.6.4-98 AND ICC-ES AC 118 AND ALLOWABLE STRENGTH SHALL BE BASED ON INFORMATION PROVIDED IN ST1.07 AND ST1.08. PENETRATION OF SCREWS THROUGH JOINED MATERIAL SHALL NOT BE LESS THAN THREE EXPOSED THREADS.
 - B. WELDING SHALL BE IN ACCORDANCE WITH AWS D1.3 USING E60XX SERIES ELECTRODES. ALL FIELD WELDING SHALL HAVE SPECIAL INSPECTION IN ACCORDANCE WITH 2007 CBC 1704A.3.1.1.



AGENCY STAMP

CODE: 2007 CBC			
SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.: ST0.00	
SHEET TITLE: GENERAL NOTES - PAGE 1 OF 3	REVISION:		DATE:

PLOT DATE: Aug 16, 2011

- C. POST-INSTALLED ANCHORS (E.G. EXPANSION ANCHORS, SCREW ANCHORS, AND POWER-ACTUATED FASTENERS) SHALL HAVE SPECIAL INSPECTION AND TESTING IN ACCORDANCE WITH THE 2007 CBC SECTIONS 1704A.4 & 1916A.8, AND COE APPLICATION NOTICE (CAN) 2-1916A.8. FOR QUALIFICATION, DESIGN AND USE OF POST-INSTALLED ANCHORS IN CONCRETE, SEE THE 2007 CBC SECTION 1912A.1 AND CAN 2-1912A.1. LISTING OF CURRENT ICC-ES EVALUATION REPORTS (OR REPORTS FROM OTHER TESTING AGENCIES ACCEPTABLE TO OSHPD) SHALL BE REQUIRED FOR FASTENERS USED.
- D. POWER-ACTUATED FASTENERS (PAF), POWDER DRIVEN FASTENERS (PDF), POWER DRIVEN PINS (PDP) AND SHOT PINS ALL REPRESENT THE SAME DEVICE AND WILL HEREAFTER BE REFERRED TO AS POWER ACTUATED FASTENERS (PAF). PAF SHALL SATISFY THE CURRENT AC70-ACCEPTANCE CRITERIA FOR FASTENERS POWER-DRIVEN INTO CONCRETE, STEEL AND MASONRY ELEMENTS AND CAN 2-1912A.1 SECTION 1.1.1. LISTING OF CURRENT ICC-ES EVALUATION REPORTS (OR REPORTS FROM OTHER TESTING AGENCIES ACCEPTABLE TO OSHPD) SHALL BE REQUIRED FOR FASTENERS USED.
- E. FOR PAF INSTALLED IN STEEL THE FASTENER PENETRATION SHALL HAVE THE ENTIRE POINTED END OF THE FASTENER DRIVEN THROUGH THE STEEL MEMBER, EXCEPT AS NOTED IN CURRENT REPORTS FROM TESTING AGENCIES ACCEPTABLE TO OSHPD.

7. DESIGN CRITERIA

- A. CODE: CALIFORNIA CODE OF REGULATIONS, TITLE 24, ASCE 7-05, 2001 AISI NASPEC, AISI S211-07 WALL STUD DESIGN AND AISI S212-07 FOR HEADER DESIGN.
- B. LOAD COMBINATIONS: ALLOWABLE STRESS DESIGN IN ACCORDANCE WITH 2007 CBC SECTION 1605A.3.1.
- C. SYSTEM WEIGHTS:
 - PARTITION WALLS = 7.5 PSF (INCLUDES METAL STUDS, TWO LAYERS OF GYP BOARD AND 1 PSF FOR INSULATION AND FINISHES)
 - SOFFITS = 10 PSF (INCLUDES METAL STUDS, TWO LAYERS OF GYP BOARD AND 3.5 PSF FOR INSULATION, FINISHES AND MINOR FIXTURES)
 - DOORS AND WINDOWS = 10 PSF
 - CABINETS = 38 PCF (INCLUDES CONTENTS AT 33 PCF PER 2007 CBC TABLE 1607A.1 AND CABINET SELF WEIGHT OF 5 PCF)
 - EQUIPMENT = 38 PCF (EQUIPMENT LOAD IS ASSUMED TO BE THE SAME AS CABINET LOAD)



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:

GENERAL NOTES - PAGE 2 OF 3

ST0.01

PLOT DATE: Aug 16, 2011

D. SEISMIC COEFFICIENTS:

$a_p = 1.0$ (ASCE 7-05, TABLE 13.5-1, CEILINGS, PARTITIONS, CABINETS, ETC.)

$R_p = 2.5$ (ASCE 7-05, TABLE 13.5-1, CEILINGS, PARTITIONS, CABINETS, ETC.)

$I_p = 1.5$ (ASCE 7-05, SECTION 13.1.3)

$z/h = 1.0$ (ALLOWS FOR INSTALLATION AT ANY FLOOR OR ROOF LEVEL OF THE BUILDING)

$F_p =$ LARGER OF 5 PSF IN ACCORDANCE WITH 2007 CBC SECTION 1607A.13 OR SEISMIC DESIGN FORCE IN ACCORDANCE WITH ASCE 7-05 SECTION 13.3.1

$F_v = 0.2S_{DS}D$ (ASCE 7-05, SECTION 13.3.1), APPLIED CONCURRENTLY WITH F_p

$\rho = 1.0$ (ASCE 7-05, SECTION 13.3.1)

Ω_o - DOES NOT APPLY (ASCE 7-05, SECTION 13.3.1)

S_{DS} - WHERE LIMITING S_{DS} VALUES ARE NOT EXPLICITLY NOTED IN THE OPD, FRAMING SYSTEM OR COMPONENT SHOWN IN THE OPD HAS BEEN DESIGNED TO ACCOMMODATE ALL S_{DS} VALUES UP TO 1.95

E. DEFLECTION LIMIT = $L/180$ (2007 CBC TABLE 1604A.3, INTERIOR PARTITION WALLS WITH FLEXIBLE FINISHES). NOT PERMITTED FOR INTERIOR PARTITION WALLS WITH BRITTLE FINISHES.

F. FASTENER ALLOWABLE STRENGTH TABLES WERE DEVELOPED BASED ON ICC REPORTS BY MULTIPLE MANUFACTURERS.

G. THE OPD DESIGN ASSUMES THAT STRUCTURAL ELEMENTS AND SUPPORTS TO WHICH THE COMPONENTS ARE ANCHORED HAVE SUFFICIENT CAPACITY TO CARRY THE LOADS IMPOSED BY THE COMPONENTS IN COMBINATION WITH ALL OTHER LOADS. EVALUATION OF THE CAPACITY OF THESE SUPPORTING STRUCTURAL ELEMENTS IS BEYOND THE SCOPE OF THE OPD.

H. LG BEAMER 7.02 SOFTWARE WAS USED FOR STUD CAPACITY CHECK. THIS SOFTWARE USES 2001 AISI NASPEC AS THE BASIS FOR SECTION PROPERTY CALCULATIONS AND INTERACTION CHECKS.

8. THE RDP IN RESPONSIBLE CHARGE SHALL VERIFY FIRE RESISTIVE AND ACOUSTICAL RATINGS FOR ALL PARTITION WALL ASSEMBLIES.

9. INDIVIDUAL DETAILS WITHIN THIS OPD TYPICALLY RELY UPON OTHER DETAILS FOR INFORMATION ESSENTIAL TO THEIR APPLICATION. OPD ARE TO BE USED IN CONJUNCTION WITH ALL RELATED, APPLICABLE DETAILS WITHIN THIS OPD PACKAGE INCLUDING THE GENERAL NOTES.

10. OPD PROVIDE OPTIONS FOR COMPONENTS SUCH AS STUD SIZES, BRACES SIZES, FASTENERS, ETC. THE RDP IN RESPONSIBLE CHARGE SHALL CLEARLY IDENTIFY ALL COMPONENTS SELECTED FOR USE IN THE PROJECT-SPECIFIC CONDITIONS.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

GENERAL NOTES - PAGE 3 OF 3

ISSUE DATE: 08/15/11


REVISION:

DATE:


OPD NO.:

ST0.02

PLOT DATE: Aug 15, 2011

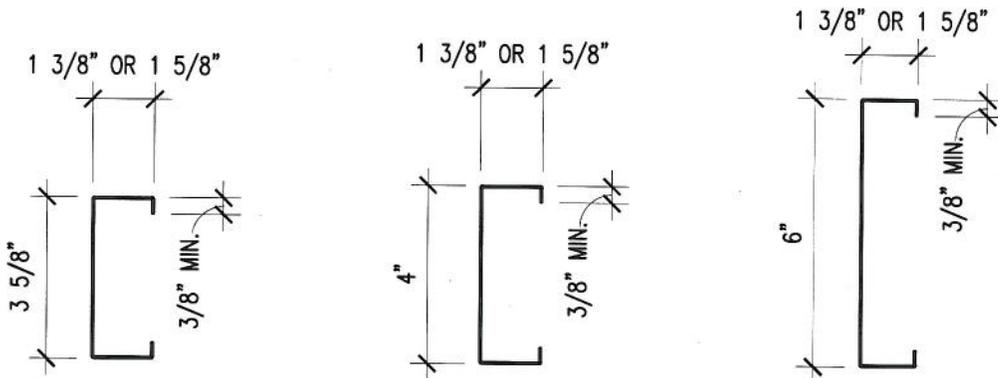

STRUCTURAL STUD (S-SECTIONS)

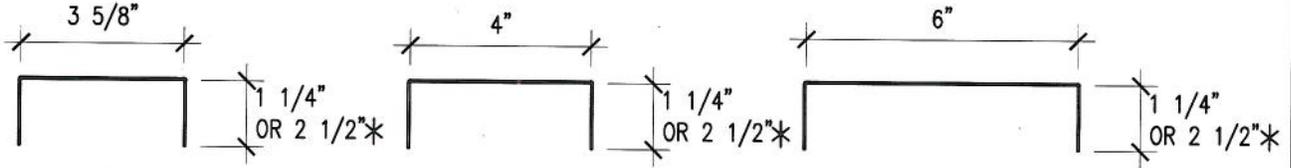

STRUCTURAL TRACK (T-SECTIONS)

* - DEEP LEG TRACK (WHERE OCCURS AS NOTED IN DETAILS)

DESIGNATION THICKNESS (MILS)	REFERENCE ONLY GAUGE NO.
18	25
27	22
33	20
43	18
54	16
68	14
97	12
118	10

NOTES:

1. SEE WALL STUD FRAMING SECTIONS FOR THICKNESS OF STUDS & TRACKS.
2. $F_y = 50\text{KSI}$ FOR 54 MIL (16GA) & THICKER SECTIONS, AND $F_y = 33\text{KSI}$ FOR SECTIONS UP TO & INCLUDING 43 MIL (18GA).
3. SIZES AND THICKNESS ARE CONSIDERED MINIMUMS.
4. STRUCTURAL STUDS MAY BE PUNCHED UNLESS NOTED OTHERWISE. STRUCTURAL TRACK MUST BE UNPUNCHED UNLESS NOTED OTHERWISE.



REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**
REVISION: DATE:

OPD NO.:


SHEET TITLE:
METAL STUD PROFILES

ST1.00

PLOT DATE: Aug 15, 2011

POWER ACTUATED FASTENER (PAF) GENERAL NOTES (INSTALLED IN CONCRETE FILLED METAL DECK OR CONC SLAB)

1. POWER ACTUATED FASTENER (PAF), POWDER DRIVEN FASTENERS (PDF), POWER DRIVEN PINS (PDP), SHOT PINS ALL REPRESENT THE SAME FASTENER AND WILL HEREAFTER BE REFERRED TO AS POWER ACTUATED FASTENERS (PAF).
2. ALLOWABLE STRENGTHS SHALL BE COMPARED TO ALLOWABLE STRESS DESIGN (ASD) LEVEL DEMAND IN ACCORDANCE WITH THE 2007 CBC SECTION 1605A.3.1.
3. ALLOWABLE STRENGTHS ARE FOR A SINGLE FASTENER WHICH MEET REQUIREMENTS PER SECTION BELOW AND TABLES ON ST1.02. THE ALLOWABLE STRENGTHS ARE BASED UPON 75% OF THE LEAST OF THE ALLOWABLE STRENGTHS LISTED IN THE ICC ESRs 2269 & 1799.
4. MINIMUM CONCRETE STRENGTH $f'_c=2000$ PSI FOR NORMAL WEIGHT CONCRETE AND $f'_c=3000$ PSI FOR ALL LIGHT WEIGHT CONCRETE UNLESS NOTED OTHERWISE.
5. POWER ACTUATED FASTENER INSTALLED THROUGH LOW FLUTES OF THE METAL DECK SHALL MEET THE REQUIREMENTS OF THE INSTALLATION CRITERIA AND SECTION BELOW.
6. MINIMUM EDGE DISTANCE OF $1 \frac{1}{8}$ " FROM THE EDGE OF METAL DECK WEB AND 4" FROM THE EDGE OF THE DECK.
7. STEEL DECK TO BE A MINIMUM OF 20GA.
8. CONCRETE FILL DEPTH ABOVE THE TOP OF METAL DECK MUST BE A MINIMUM OF $3 \frac{1}{4}$ " AT LIGHT WEIGHT CONCRETE COMPOSITE METAL DECK.
9. PAF SHALL NOT BE USED TO RESIST SEISMIC SHEAR FORCES EXCEPT AT INTERIOR NON-LOAD BEARING, NON-SHEAR WALL PARTITION WALLS (AS PERMITTED BY CAN 2-1912A.1) AND COMPONENTS EXEMPT FROM CONSTRUCTION DOCUMENT REVIEW BY THE 2007 CAC, SECTION 7-125 (NOT PERMITTED TO TAKE SEISMIC SHEAR BY ICC-ES AC70 FOR ANY OTHER CONDITIONS). PAF SHALL NOT BE USED TO CARRY SEISMIC TENSION LOADS (EXCEPT FOR VERTICAL SEISMIC LOAD PRODUCED BY SELF WEIGHT OF THE COMPONENTS) OR IN CRACKED CONCRETE UNLESS APPROVED FOR SUCH LOADING BY OSHPD.
10. PAF SHALL NOT BE USED IN PRE-STRESSED CONCRETE UNLESS NON-DESTRUCTIVE TESTING METHODS ARE USED TO LOCATE STRAND AND REINFORCEMENT PRIOR TO FASTENER INSTALLATION.
11. PAF INSTALLATION SHALL NOT NICK OR DAMAGE EXISTING CONCRETE REINFORCEMENT. SHOULD THIS OCCUR THE RDP IN RESPONSIBLE CHARGE SHALL BE NOTIFIED IMMEDIATELY. PAF SHALL BE INSTALLED 1" CLEAR OF EXISTING REINFORCEMENT.
12. PAF SHALL BE INSTALLED PER CURRENT ICC-ES EVALUATION REPORTS (OR REPORTS FROM OTHER TESTING AGENCIES ACCEPTABLE TO OSHPD) AND PER CAN 2-1912A.1.
13. TESTING OF PAF SHALL BE PER 2007 CBC SECTION 1916A.8 AND CAN 2-1916A.8. MINIMUM CONCRETE SUBSTRATE THICKNESS IS THREE TIMES THE PAF PENETRATION INTO THE CONCRETE SUBSTRATE.
14. TESTING IS NOT REQUIRED OF PAF USED TO ATTACHED TRACKS OF INTERIOR NON-SHEAR WALL PARTITIONS FOR SHEAR ONLY WHERE THERE ARE AT LEAST THREE FASTENERS.
15. TOTAL ALLOWABLE LOADS IN TENSION, SHEAR OR TENSION SHEAR COMBINATIONS SHALL NOT EXCEED 100 LB AS REQUIRED BY CAN 2-1912A.1.
16. REFER TO NOTE 6D ON ST0.01 FOR ADDITIONAL PAF REQUIREMENTS.

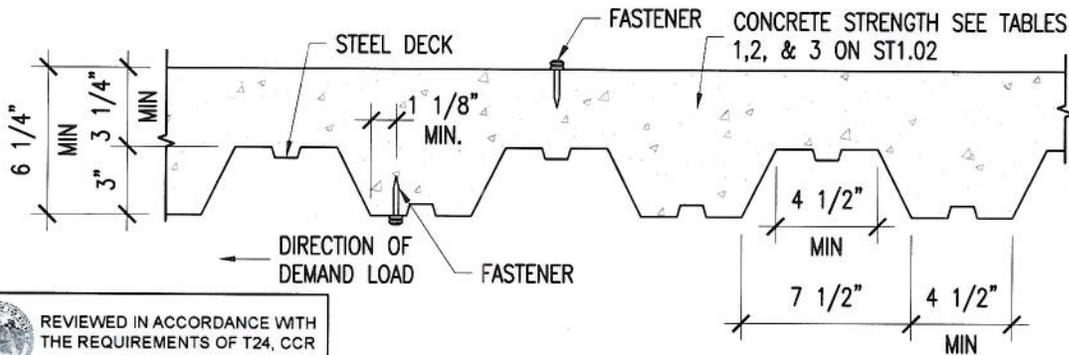


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:
POWER ACTUATED FASTENER (PAF)
GENERAL NOTES (INSTALLED IN CONCRETE
FILLED METAL DECK OR CONC SLAB)

ST1.01

PLOT DATE: Aug 15, 2011

POWER ACTUATED FASTENER (PAF) ALLOWABLE STRENGTHS (INSTALLED IN CONCRETE FILLED METAL DECK OR CONC SLAB)

TABLE 1
POWER ACTUATED FASTENER INSTALLED IN SAND-LIGHTWEIGHT CONCRETE THROUGH METAL DECK (f'c MIN=3000 PSI)

NOMINAL SHANK DIAMETER (IN)	MIN. EMBED (IN)	MIN. SPACING (IN)	MIN. EDGE DISTANCE (IN)	TENSION (LB) (SEE NOTE 15)	SHEAR (LB) (SEE NOTE 15)
0.145 MIN	1	4	3.2	90	100
	1 1/4	4	3.2	90	100
	1 1/2	4	3.2	100	100

TABLE 2
POWER ACTUATED FASTENER INSTALLED INTO STRUCTURAL SAND-LIGHTWEIGHT CONCRETE (f'c MIN=3000 PSI)

NOMINAL SHANK DIAMETER (IN)	MIN. EMBED (IN)	MIN. SPACING (IN)	MIN. EDGE DISTANCE (IN)	TENSION (LB) (SEE NOTE 15)	SHEAR (LB) (SEE NOTE 15)
0.145 MIN	1	4	3.2	100	100
	1 1/4	4	3.2	100	100
	1 1/2	4	3.2	100	100

TABLE 3
POWER ACTUATED FASTENER INSTALLED INTO NORMAL-WEIGHT CONCRETE (f'c MIN=2000 PSI)

NOMINAL SHANK DIAMETER (IN)	MIN. EMBED (IN)	MIN. SPACING (IN)	MIN. EDGE DISTANCE (IN)	TENSION (LB) (SEE NOTE 15)	SHEAR (LB) (SEE NOTE 15)
0.145 MIN	1	5.1	3.2	100	100
	1 1/4	5.1	3.2	100	100
	1 1/2	5.1	3.2	100	100


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:


POWER ACTUATED FASTENER (PAF)
 ALLOWABLE STRENGTHS (INSTALLED IN
 CONC FILLED METAL DECK OR CONC SLAB)

ST1.02

PLOT DATE: Aug 15, 2011

EXPANSION ANCHOR GENERAL NOTES

1. ALLOWABLE STRENGTHS SHALL BE COMPARED TO ALLOWABLE STRESS DESIGN (ASD) LEVEL DEMAND IN ACCORDANCE WITH THE 2007 CBC SECTION 1605A.3.1.
2. ALLOWABLE STRENGTHS ARE FOR SINGLE ANCHORS WHICH MEET MIN. REQUIREMENTS PER TABLE & SECTION BELOW.
3. MINIMUM CONCRETE STRENGTH $f'_c=3000$ PSI.
4. EXPANSION ANCHORS INSTALLED THROUGH UPPER OR LOWER FLUTES OF METAL DECK SHALL MEET THE REQUIREMENTS OF THE INSTALLATION CRITERIA AND SECTION BELOW.
5. STEEL DECK TO BE MIN. 20 GA. W-DECK.
6. MINIMUM CONCRETE FILL DEPTH ABOVE THE TOP OF METAL DECK PER SECTION AND INSTALLATION CRITERIA BELOW.
7. EXPANSION ANCHORS SHALL NOT BE USED IN PRE-STRESSED CONCRETE UNLESS NON-DESTRUCTIVE TESTING METHODS ARE USED TO LOCATE STRAND & REINFORCING PRIOR TO ANCHOR INSTALLATION.
8. EXPANSION ANCHOR INSTALLATION SHALL NOT NICK OR DAMAGE EXISTING REINFORCEMENT. SHOULD THIS OCCUR THE RDP IN RESPONSIBLE CHARGE SHALL BE NOTIFIED IMMEDIATELY. EXPANSION ANCHORS SHALL BE INSTALLED 1" CLEAR OF EXISTING REINFORCEMENT.
9. EXPANSION ANCHORS SHALL BE INSTALLED PER CURRENT ICC-ES EVALUATION REPORT OR REPORT FROM OTHER TESTING AGENCY ACCEPTABLE TO OSHPD & PER CAN 2-1912A.1.
10. TESTING OF EXPANSION ANCHORS SHALL BE PER 2007 CBC SECTION 1916A.8 AND PER CAN 2-1916A.8.
11. EXPANSION ANCHORS SHALL BE INSTALLED TO COMPLY W/ THE MINIMUM SLAB THICKNESS REQUIREMENTS ESTABLISHED BY THE MANUFACTURER'S TECHNICAL GUIDE FOR THE SPECIFIED ANCHOR.
12. REFER TO NOTE 6C ON ST0.01 FOR ADDITIONAL EXPANSION ANCHOR REQUIREMENTS.
13. ALL VALUES IN TABLES ARE FOR CRACKED CONCRETE & INCLUDE 0.75 REDUCTION BASED ON ACI 318-05 D3.3.3 REQUIREMENTS. THE ALLOWABLE STRENGTHS ARE BASED UPON 75% OF THE LEAST OF THE ALLOWABLE STRENGTHS CALCULATED USING THE ICC ESRs 1917 & 2427.

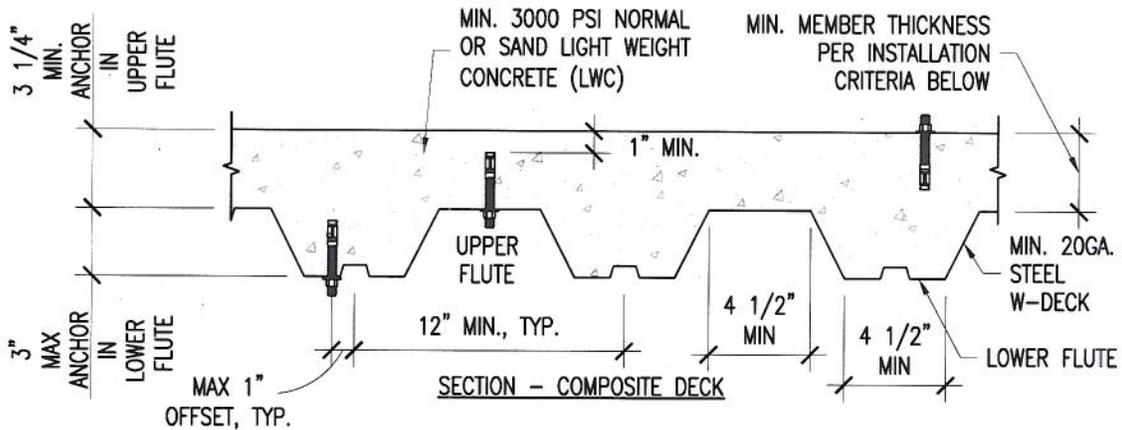

EXPANSION ANCHORS INSTALLATION CRITERIA

	NOMINAL ANCHOR DIAMETER (IN)				
	3/8	1/2	5/8	1	1 1/8
EFFECTIVE MIN. EMBEDMENT (IN)	2	2	3 1/4	3 1/8	4
MIN. MEMBER THICKNESS NWC SLAB OR BEAM ONLY (IN)	4	4	6	5	6
MIN. ANCHOR SPACING (3 x EMBED) (IN)	6 3/4	6 3/4	9 3/4	9 3/8	12
MIN. EDGE DISTANCE (IN)	4 3/8	6	7 1/2	6 1/2	8 3/4


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:

EXPANSION ANCHOR GENERAL NOTES

ST1.03

PLOT DATE: Aug 15, 2011

EXPANSION ANCHOR ALLOWABLE STRENGTHS

TABLE 1

EXPANSION ANCHORS INSTALLED IN TO THE UNDERSIDE OF STRUCTURAL SAND-LIGHTWEIGHT CONCRETE
(f'c MIN=3000 PSI) OVER METAL DECK

ANCHOR DIA. (IN)	EMBED (IN)	SHEAR (LB)	TENSION (LB)
3/8	2	467	508
1/2	2	643	508
1/2	3 1/4	1108	912
5/8	3 1/8	845	696
5/8	4	1919	1617

TABLE 2

EXPANSION ANCHORS INSTALLED IN TO THE TOP OF STRUCTURAL SAND-LIGHTWEIGHT CONCRETE
(f'c MIN=3000 PSI) OVER METAL DECK

ANCHOR DIA. (IN)	EMBED (IN)	SHEAR (LB)	TENSION (LB)
3/8	2	593	520
1/2	2	593	550

TABLE 3

EXPANSION ANCHORS INSTALLED IN NORMAL WEIGHT CONCRETE (f'c MIN=3000 PSI)

ANCHOR DIA. (IN)	EMBED (IN)	SHEAR (LB)	TENSION (LB)
3/8	2	638	866
1/2	2	987	917
1/2	3 1/4	2046	1875
5/8	3 1/8	1929	1719
5/8	4	2793	2561



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

**EXPANSION ANCHOR ALLOWABLE
STRENGTHS**

ST1.04

PLOT DATE: Aug 15, 2011

POWER ACTUATED FASTENER (PAF) GENERAL NOTES (INSTALLED IN STEEL)

1. MINIMUM STEEL TENSILE STRENGTH $F_u=58$ KSI.
2. MINIMUM SPACING 1 INCH.
3. MINIMUM EDGE DISTANCE 1/2 INCH.
4. USE KNURLED SHANK.
5. POWER ACTUATED FASTENERS (PAF) SHALL BE INSTALLED PER CURRENT ICC-ES EVALUATION REPORTS OR REPORTS FROM OTHER TESTING AGENCIES ACCEPTABLE TO OSHPD.
6. SEE GENERAL NOTE 6D & E ON ST0.01 FOR PAF REQUIREMENTS & ATTACHMENT TO STEEL.
7. POWER POWER ACTUATED FASTENER (PAF), POWDER DRIVEN FASTENERS (PDF), POWER DRIVEN PINS (PDP), SHOT PINS, ARE COMMON NOMINCLATURES THAT ALL REPRESENT THE SAME FASTENER.
8. ALLOWABLE STRENGTHS SHALL BE COMPARED TO ALLOWABLE STRESS DESIGN (ASD) LEVEL DEMAND IN ACCORDANCE WITH THE 2007 CBC SECTION 1605A.3.1.
9. ALLOWABLE STRENGTHS ARE FOR SINGLE FASTENER, WHICH MEETS THE REQUIREMENTS PER NOTES ABOVE. THE ALLOWABLE STRENGTHS ARE BASED UPON 75% OF THE LEAST OF THE ALLOWABLE STRENGTHS LISTED IN THE ICC ESRs 2269, 1799 & 2138.
10. TOTAL ALLOWABLE TENSION, SHEAR OR TENSION SHEAR COMBINATION SHALL NOT EXCEED 250 LB AS REQUIRED BY THE 2010 CBC.
11. LIMIT USE TO INTERIOR NON-BEARING, NON-SHEAR WALL PARTITIONS AND COMPONENTS EXEMPT FROM CONSTRUCTION DOCUMENTS REVIEW BY THE 2007 CAC SECTION 7-125 (NOT PERMITTED TO TAKE SEISMIC SHEAR BY ICC-ES AC 70 EXCEPT FOR ANY OTHER CONDITIONS.)

POWER ACTUATED FASTENER (PAF) ALLOWABLE STRENGTHS (INSTALLED IN STEEL)

NOMINAL SHANK DIAMETER (IN)	STEEL THICKNESS (IN)							
	3/16		1/4		3/8		1/2	
	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)
0.145 MIN	218	250	250	250	250	250	190	220



REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED



Office of Statewide Health Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP		
CODE: 2007 CBC		
SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: POWER ACTUATED FASTENER GENERAL NOTES AND ALLOWABLE STRENGTHS (INSTALLED IN STEEL)	REVISION:	DATE:
		ST1.05

PLOT DATE: Aug 15, 2011

SHEET METAL SCREW (SMS) GENERAL NOTES

1. THE ALLOWABLE STRENGTHS ARE BASED UPON THE AISI SPECIFICATIONS 2007 EDITION AND ARE LIMITED BY ACTUAL TESTED STRENGTH OF THE SCREWS IN TENSION AND SHEAR.
2. THE ALLOWABLE STRENGTHS ARE BASED UPON THE LEAST OF THE AVERAGE TESTED TENSILE AND SHEAR STRENGTHS TABULATED FROM ICC ESR'S 1976, 2196, 1730, 1408, AND THE STEEL STUD MANUFACTURER'S ASSOCIATION (SSMA). FASTENER TYPES AND SIZES APPLY TO NON-PROPRIETARY FASTENER TYPES AND SIZES, AND DOES NOT ENDORSE A SPECIFIC MANUFACTURER. WHERE PROPRIETARY FASTENERS ARE SPECIFIED, NO EXCEPTIONS ARE TAKEN TO THE USE OF MANUFACTURER SPECIFIC VALUES THAT ARE BASED UPON THE 2007 AISI, SECTION E4. ALL SCREW FASTENERS SHALL SATISFY ICC-ES AC118-ACCEPTANCE CRITERIA FOR SELF TAPPING SCREW FASTENERS.
3. TABLE 1 REPRESENTS ALLOWABLE TENSION AND SHEAR STRENGTHS FOR NON-PROPRIETARY SHEET METAL SCREWS FOR STEEL TO STEEL CONNECTIONS.
4. TABLE 2 AND 3 REPRESENT ALLOWABLE TENSION AND SHEAR STRENGTHS THAT INCORPORATE THE EFFECTS OF EITHER ONE OR TWO LAYERS OF 5/8" GYPSUM BOARD BETWEEN FASTENER HEAD AND CONNECTING STEEL MATERIAL.
5. IN ORDER TO USE THE VALUES IN TABLES 1, 2, AND 3, THE ATTACHMENTS MUST BE DETAILED IN SUCH A WAY AS TO AVOID PRYING AND THE STUDS MUST BE STABILIZED WITH FULL-DEPTH BLOCKING WITH CONTINUOUS STRAPS ALONG THE FLANGES OR WITH BACKING BARS.
6. PENETRATION OF SCREWS THROUGH JOINED MATERIAL SHOULD NOT BE LESS THAN 3 EXPOSED THREADS.
7. STEEL THICKNESSES JOINED ARE ASSUMED TO BE THE SAME. IF DISSIMILAR THICKNESSES ARE BEING CONNECTED, THE VALUE FOR THE THINNER PART JOINED SHALL BE USED.
8. THE MINIMUM SPACING BETWEEN CENTERS OF FASTENERS SHALL NOT BE LESS THAN 3 X FASTENER DIAMETER. THE MINIMUM EDGE DISTANCE FROM THE CENTER OF A FASTENER TO THE EDGE OF ANY PART SHALL NOT BE LESS THAN 1.5 X FASTENER DIAMETER. WHERE THE END DISTANCE IS PARALLEL TO THE FORCE ON THE FASTENER, THE NOMINAL SHEAR STRENGTH SHALL BE LIMITED BY SECTION E4.3.2 OF THE AISI.
9. GALVANIZED METAL STUDS, TRACK AND SHEET STEEL SHALL CONFORM TO ASTM A653 MATERIAL (OR OTHER EQUIVALENT ASTM LISTED MATERIALS IN THE 2007 EDITION OF THE AISI NASPEC, SECTION A2.1) WITH A MINIMUM YIELD STRENGTH OF 33 KSI FOR 43 MIL (18 GA) AND LIGHTER, AND MINIMUM YIELD STRENGTH OF 50 KSI FOR 54 MIL (16 GA) & HEAVIER.
10. WHERE VALUES ARE NOT GIVEN, SUCH COMBINATIONS OF SCREW SIZES & MATERIAL THICKNESS ARE NOT RECOMMENDED.
11. IF THE ATTACHMENT DETAILS RESULT IN PRYING WITH A MOMENT ARM NOT TO EXCEED 1 5/8", THE VALUES IN TABLE 4 MAY BE USED. IF THE ATTACHMENT DETAILS RESULT IN PRYING WITH A MOMENT ARM THAT EXCEEDS 1 5/8", THE REREGISTERED DESIGN PROFESSIONAL IN RESPONSIBLE CHARGE OF THE PROJECT SHALL DETERMINE THE ALLOWABLE VALUES AND SUBMIT SUBSTANTIATION FOR THEM TO OSHPD FOR REVIEW.
12. INTERACTION OF SHEAR AND TENSION SHALL BE BASED ON $T/T_{ALL} + V/V_{ALL} \leq 1.0$.
13. REFER TO NOTE 6A ON ST0.00 FOR ADDITIONAL SHEET METAL SCREW REQUIREMENTS.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

SHEET METAL SCREW GENERAL NOTES

ISSUE DATE: 08/15/11

REVISION:

DATE:

OPD NO.:

ST1.06

PLOT DATE: Aug 15, 2011

SHEET METAL SCREW (SMS) ALLOWABLE STRENGTHS

TABLE 1

SHEET METAL SCREW ALLOWABLE STRENGTHS FOR STEEL TO STEEL CONNECTIONS.

		FASTENER SIZE									
F _y (KSI)	MIL (STEEL GA)	NO. 14		NO. 12		NO. 10		NO. 8		NO. 6	
		0.250 IN		0.216 IN		0.190 IN		0.164 IN		0.138 IN	
		SHEAR (LB)	TENSION (LB)								
50	97 (12)	704	275	525	205						
	68 (14)	704	275	525	205	405	159				
	54 (16)	613	261	525	205	405	159	303	118		
33	43 (18)	302	144	280	124	263	109	244	94	165	79
	33 (20)					177	84	164	72	151	61

NOTES:

- SEE GENERAL NOTES ON ST1.06 FOR MORE INFORMATION.
- WHERE ONE OR TWO LAYERS OF GYP BOARD OCCURS BETWEEN STEEL SURFACES, THE ALLOWABLE VALUES OF TABLE 2 & 3 SHALL BE USED.
- ALLOWABLE STRENGTH VALUES DO NOT ACCOUNT FOR EFFECTS FROM PRYING. THE RDP IN RESPONSIBLE CHARGE OF THE PROJECT SHALL PROVIDE ADEQUATE BLOCKING/RESTRAINT TO PREVENT PRYING ACTION. WHERE PRYING OCCURS, THE VALUES AND CONSTRAINTS OF TABLE 4 SHALL BE USED.

TABLE 2 - NON-PRYING CONDITION

SHEET METAL SCREW ALLOWABLE STRENGTHS FOR STEEL TO STEEL CONNECTIONS WITH ONE LAYER OF 5/8" GYP BOARD BETWEEN STEEL SURFACES.

		FASTENER SIZE									
F _y (KSI)	MIL (STEEL GA)	NO. 14		NO. 12		NO. 10		NO. 8		NO. 6	
		0.250 IN		0.216 IN		0.190 IN		0.164 IN		0.138 IN	
		SHEAR (LB)	TENSION (LB)								
50	97 (12)	226	275	180	205						
	68 (14)	226	275	180	205	140	159				
	54 (16)	226	261	180	205	140	159	120	118		
33	43 (18)	226	144	180	124	140	109	120	94	60	79
	33 (20)					100	84	80	72	60	61

NOTES:

- SEE GENERAL NOTES ON ST1.06 FOR MORE INFORMATION.
- ALLOWABLE STRENGTH VALUES DO NOT ACCOUNT FOR EFFECTS FROM PRYING. RDP IN RESPONSIBLE CHARGE TO PROVIDE ADEQUATE BLOCKING/RESTRAINT TO PREVENT PRYING ACTION. WHERE PRYING OCCURS, THE VALUES AND CONSTRAINTS OF TABLE 4 SHALL BE USED.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

SHEET TITLE:
SHEET METAL SCREW ALLOWABLE STRENGTHS

ISSUE DATE: **08/15/11**

REVISION: DATE:

OPD NO.:

ST1.07

PLOT DATE: Aug 15, 2011

SHEET METAL SCREW (SMS) ALLOWABLE STRENGTHS (CONTINUED)

TABLE 3 - NON-PRying CONDITION

SHEET METAL SCREW ALLOWABLE STRENGTHS FOR STEEL TO STEEL CONNECTIONS WITH TWO LAYERS OF 5/8" GYP BOARD BETWEEN STEEL SURFACES.

F _y (KSI)	MIL (STEEL GA)	FASTENER SIZE									
		NO. 14 0.250 IN		NO. 12 0.216 IN		NO. 10 0.190 IN		NO. 8 0.164 IN		NO. 6 0.138 IN	
		SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)
50	97 (12)	166	275	130	205						
	68 (14)	166	275	130	205	100	159				
	54 (16)	166	261	130	205	100	159	80	118		
33	43 (18)	166	144	130	124	100	109	80	94	50	79
	33 (20)					70	84	50	72	40	61

NOTES:

- SEE GENERAL NOTES ON ST1.06 FOR MORE INFORMATION.
- ALLOWABLE STRENGTH VALUES DO NOT ACCOUNT FOR EFFECTS FROM PRying. RDP IN RESPONSIBLE CHARGE TO PROVIDE ADEQUATE BLOCKING/RESTRAINT TO PREVENT PRying ACTION. WHERE PRying OCCURS, THE VALUES AND CONSTRAINTS OF TABLE 4 SHALL BE USED.


TABLE 4 - PRying CONDITION (SEE DETAILS BELOW - STRUT CAN BE HORIZONTAL OR VERTICAL)

SHEET METAL SCREW ALLOWABLE STRENGTHS FOR STEEL TO STEEL CONNECTIONS WITH ONE OR TWO LAYERS OF 5/8" GYP BOARD BETWEEN STEEL SURFACES AND MAXIMUM PRying MOMENT ARM OF 1 5/8".

F _y (KSI)	MIL (STEEL GA)	FASTENER SIZE									
		NO. 14 0.250 IN		NO. 12 0.216 IN		NO. 10 0.190 IN		NO. 8 0.164 IN		NO. 6 0.138 IN	
		SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)	SHEAR (LB)	TENSION (LB)
50	97 (12)	40	275	30	205						
	68 (14)	40	275	30	205	25	159				
	54 (16)	40	261	30	205	25	159	20	118		
33	43 (18)	40	144	30	124	25	109	20	94	10	79
	33 (20)					15	84	15	72	10	61

NOTES:

- SEE GENERAL NOTES ON ST1.06 FOR MORE INFORMATION.
- THE ALLOWABLE STRENGTH VALUES LISTED IN TABLE 4 ARE BASED UPON A LIMITED TEST ASSEMBLY WHERE THE ORIGIN AND DIRECTION OF THE LOAD RESULTS IN PRying UPON THE FASTENER. THE MAGNITUDE OF THIS PRying EFFECT SHALL BE LIMITED TO A MOMENT ARM OF 1 5/8" FROM THE FASTENER.

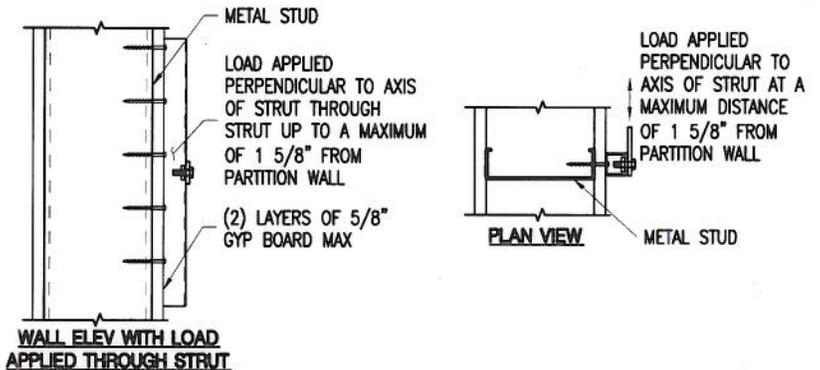


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

SHEET TITLE:
SHEET METAL SCREW ALLOWABLE STRENGTHS (CONTINUED)

ISSUE DATE: **08/15/11**

REVISION: DATE:


OPD NO.:

ST1.08

PLOT DATE: Aug 15, 2011

SCREW ANCHOR GENERAL NOTES

1. ALLOWABLE STRENGTHS SHALL BE COMPARED TO ALLOWABLE STRESS DESIGN (ASD) LEVEL DEMAND IN ACCORDANCE WITH THE 2007 CBC SECTION 1605A.3.1.
2. ALLOWABLE STRENGTHS ARE FOR SINGLE ANCHORS WHICH MEET MIN. REQUIREMENTS PER TABLE & SECTION BELOW.
3. MINIMUM CONCRETE STRENGTH $f'_c=3000$ PSI.
4. STEEL DECK TO BE MIN. 20 GA. W-DECK.
5. MINIMUM CONCRETE FILL DEPTH ABOVE THE TOP OF METAL DECK PER SECTION AND INSTALLATION CRITERIA BELOW.
6. SCREW ANCHORS SHALL NOT BE USED IN PRE-STRESSED CONCRETE UNLESS NON-DESTRUCTIVE TESTING METHODS ARE USED TO LOCATE STRAND & REINFORCING PRIOR TO ANCHOR INSTALLATION.
7. SCREW ANCHOR INSTALLATION SHALL NOT NICK OR DAMAGE EXISTING REINFORCEMENT. SHOULD THIS OCCUR THE RDP IN RESPONSIBLE CHARGE SHALL BE NOTIFIED IMMEDIATELY. SCREW ANCHORS SHALL BE INSTALLED 1" CLEAR OF EXISTING REINFORCEMENT.
8. SCREW ANCHORS SHALL BE INSTALLED PER CURRENT ICC-ES EVALUATION REPORT OR REPORT FROM OTHER TESTING AGENCIES ACCEPTABLE TO OSHPD & PER CAN 2-1912A.1.
9. TESTING OF SCREW ANCHORS SHALL BE PER 2007 CBC SECTION 1916A.8 AND PER CAN 2-1916A.8.
10. SCREW ANCHORS SHALL BE INSTALLED TO COMPLY W/ THE MINIMUM SLAB THICKNESS REQUIREMENTS ESTABLISHED BY THE MANUFACTURER'S TECHNICAL GUIDE FOR THE SPECIFIED ANCHOR.
11. REFER TO NOTE 6C ON ST0.00 FOR ADDITIONAL SCREW ANCHOR REQUIREMENTS.
12. ALL VALUES IN TABLES ARE FOR CRACKED CONCRETE & INCLUDE 0.75 REDUCTION BASED ON ACI 318-05 D3.3.3 REQUIREMENTS. THE ALLOWABLE STRENGTHS ARE BASED UPON 75% OF THE LEAST OF THE ALLOWABLE STRENGTHS CALCULATED USING THE ICC ESRs 2526, 2713 & 3027.
13. USE OF SCREW ANCHOR SHALL BE LIMITED TO DRY INTERIOR CONDITIONS. SCREW ANCHORS SHALL NOT BE PERMITTED AT THE UNDERSIDE OF BEAM/SLAB. REUSE OF SCREW ANCHOR OR SCREW ANCHOR HOLE SHALL NOT BE PERMITTED.

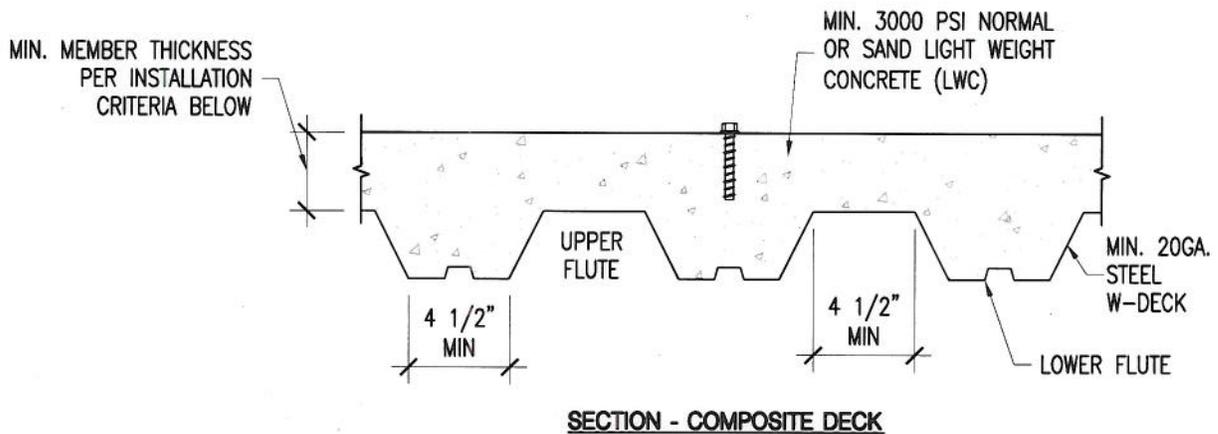

SCREW ANCHORS INSTALLATION CRITERIA

	NOMINAL ANCHOR DIAMETER (IN)				
	3/8	1/2	5/8		
EFFECTIVE MIN. EMBEDMENT (IN)	2 1/2	2 1/2	3 1/2	3 1/4	5
MIN. MEMBER THICKNESS NWC SLAB OR BEAM ONLY (IN)	4	5	6	6	7
MIN. ANCHOR SPACING (IN)	3	3 1/2	3	5	4
MIN. EDGE DISTANCE (IN)	3 3/4	3 3/4	5 1/4	4 7/8	7 1/2


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24. CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

SHEET TITLE:
SCREW ANCHOR GENERAL NOTES

ISSUE DATE: **08/15/11**

REVISION: DATE:

OPD NO.:

ST1.09

PLOT DATE: Aug 15, 2011

SCREW ANCHOR ALLOWABLE STRENGTHS

TABLE 1

SCREW ANCHORS INSTALLED IN TO THE TOP OF STRUCTURAL SAND-LIGHTWEIGHT CONCRETE
(f'c MIN=3000 PSI) OVER METAL DECK

ANCHOR DIA. (IN)	EMBED (IN)	SHEAR (LB)	TENSION (LB)
3/8	2 1/2	357	236
1/2	2 1/2	393	309

TABLE 2

SCREW ANCHORS INSTALLED IN NORMAL WEIGHT CONCRETE (f'c MIN=3000 PSI)

ANCHOR DIA. (IN)	EMBED (IN)	SHEAR (LB)	TENSION (LB)
3/8	2 1/2	594	414
1/2	2 1/2	655	515
1/2	3 1/2	1174	961
5/8	3 1/4	1098	1177
5/8	5	2164	1364



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:
SCREW ANCHOR DESIGN ALLOWABLE STRENGTHS

ST1.10

PLOT DATE: Aug 15, 2011

TYPICAL PARTITION WALL CONDITIONS

- CONDITION 'A' - PARTITION WALL WITHOUT ATTACHMENTS. SEE DETAIL ST2.02
- CONDITION 'B' - PARTITION WALL SUPPORTING CABINETS OR EQUIPMENT ON ONE SIDE OR BOTH SIDES OF THE WALL DISTRIBUTING UP TO 50 LB TOTAL VERTICAL LOAD PER STUD (37 PLF). REFER TO GENERAL NOTE 7C ON ST0.01. CENTER OF GRAVITY LESS THAN 6" FROM THE FACE OF THE STUD. SEE DETAIL ST2.03.
- CONDITION 'C' - PARTITION WALL SUPPORTING OVERHEAD AND/OR BASE CABINETS OR EQUIPMENT ON ONE SIDE OR BOTH SIDES OF THE WALL, DISTRIBUTING UP TO 152 LB TOTAL VERTICAL LOAD PER STUD (114 PLF). REFER TO GENERAL NOTE 7C ON ST0.01. CENTER OF GRAVITY WITHIN 6" OF FACE OF THE STUD. SEE DETAIL ST2.04.
- CONDITION 'D' - PARTITION WALL SUPPORTING FULL HEIGHT CABINETS OR EQUIPMENT ON ONE SIDE OR BOTH SIDES OF THE WALL, DISTRIBUTING UP TO 380 LB TOTAL VERTICAL LOAD PER STUD (285 PLF). REFER TO GENERAL NOTE 7C ON ST0.01. CENTER OF GRAVITY WITHIN 6" OF FACE OF THE STUD. SEE DETAIL ST2.04.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:

TYPICAL PARTITION WALL CONDITIONS

ST2.00

PLOT DATE: Aug 15, 2011

PARTITION WALL SCHEDULES

SCHEDULE 1: MINIMUM PARTITION WALL STUD SIZE (PARTITION CONDITION 'A')

S _{ps}	WALL HEIGHT				
	9 FT	12 FT	16 FT		
0.25-0.99	362S137-33	362S137-33	362S137-43	400S137-43	600S137-33
1.00-1.25	362S137-33	362S137-33	362S137-43	400S137-43	600S137-33
1.26-1.45	362S137-33	362S137-33	362S137-43	400S137-43	600S137-33
1.46-1.95	362S137-33	362S137-33	362S137-54	400S137-54	600S137-43

SCHEDULE 2: MINIMUM PARTITION WALL STUD SIZE (PARTITION CONDITION 'B')

S _{ps}	WALL HEIGHT				
	9 FT	12 FT	16 FT		
0.25-0.99	362S137-33	362S137-43	362S137-54	400S137-43	
1.00-1.25	362S137-33	362S137-43	NA	400S137-54	600S137-43
1.26-1.45	362S137-33	362S137-43	NA	400S137-54	600S137-43
1.46-1.95	362S137-33	362S137-54	400S137-43	NA	400S137-54

SCHEDULE 3: MINIMUM PARTITION WALL STUD SIZE (PARTITION CONDITION 'C')

S _{ps}	WALL HEIGHT				
	9 FT	12 FT		16 FT	
0.25-0.99	362S137-33		362S137-54	400S137-43	600S137-43
1.00-1.25	362S137-43		362S137-54	400S137-54	600S137-43
1.26-1.45	362S137-43		NA	400S137-54	600S137-43
1.46-1.95	362S137-54	400S137-54	NA	NA	600S137-54

SCHEDULE 4: MINIMUM PARTITION WALL STUD SIZE (PARTITION CONDITION 'D')

S _{ps}	WALL HEIGHT					
	9 FT		12 FT		16 FT	
0.25-0.99	362S137-33		362S137-43			600S137-43
1.00-1.25	362S137-43		NA	400S137-54		600S137-43
1.26-1.45	362S137-43		NA	400S137-54	600S137-43	600S137-54
1.46-1.95	NA	400S137-54	600S137-54	NA	NA	600S137-54

NOTES:

- PARTITION WALL STUDS ARE SPACED @ 16" O.C. TYPICAL UNLESS NOTED OTHERWISE.
- SEE ST2.06 FOR PARTITION WALL ELEVATION & ADDITIONAL INFORMATION.
- SEE ST2.00 FOR DEFINITION OF PARTITION WALL CONDITIONS.
- SEE ST1.00 FOR METAL STUD PROFILES.
- 362S137-33 IS A 3 5/8" WIDE STUD WITH 1 3/8" WIDE FLANGE THAT IS 33 MIL THICK.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**


OPD NO.:

REVISION: DATE:


SHEET TITLE:
PARTITION WALL SCHEDULES

ST2.01

PLOT DATE: Aug 15, 2011

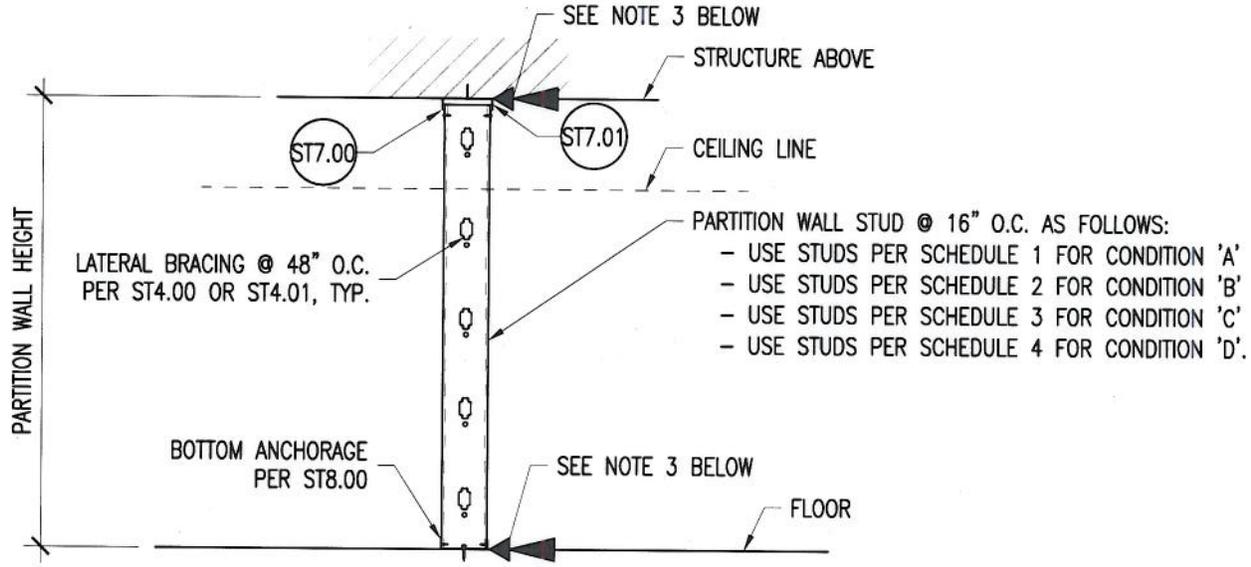

(A) FULL HEIGHT PARTITION WALL

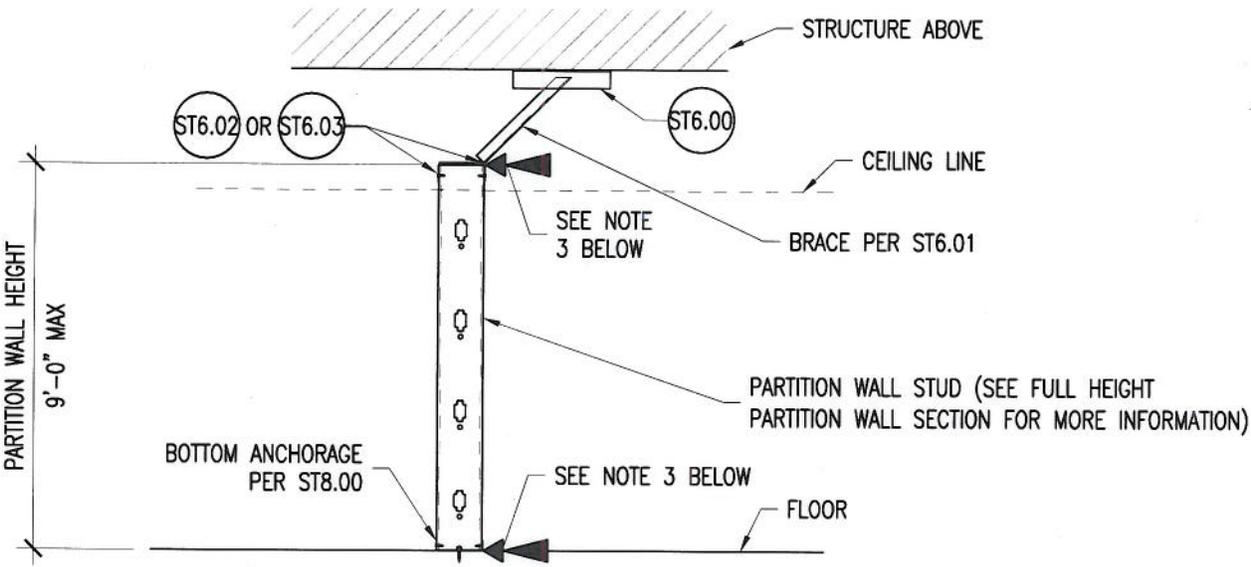

(B) PARTIAL HEIGHT PARTITION WALL

- NOTES:**
1. PARTITION WALL SCHEDULES PER ST2.01.
 2. SEE ST2.00 FOR DEFINITION OF PARTITION WALL CONDITIONS.
 3. SEE ST6.11 FOR TOP & BOTTOM CONNECTION DEMANDS.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS


ISSUE DATE: 08/15/11
REVISION: DATE:

OPD NO.:

SHEET TITLE:
TYPICAL PARTITION WALL SECTIONS

ST2.02

PLOT DATE: Aug 15, 2011

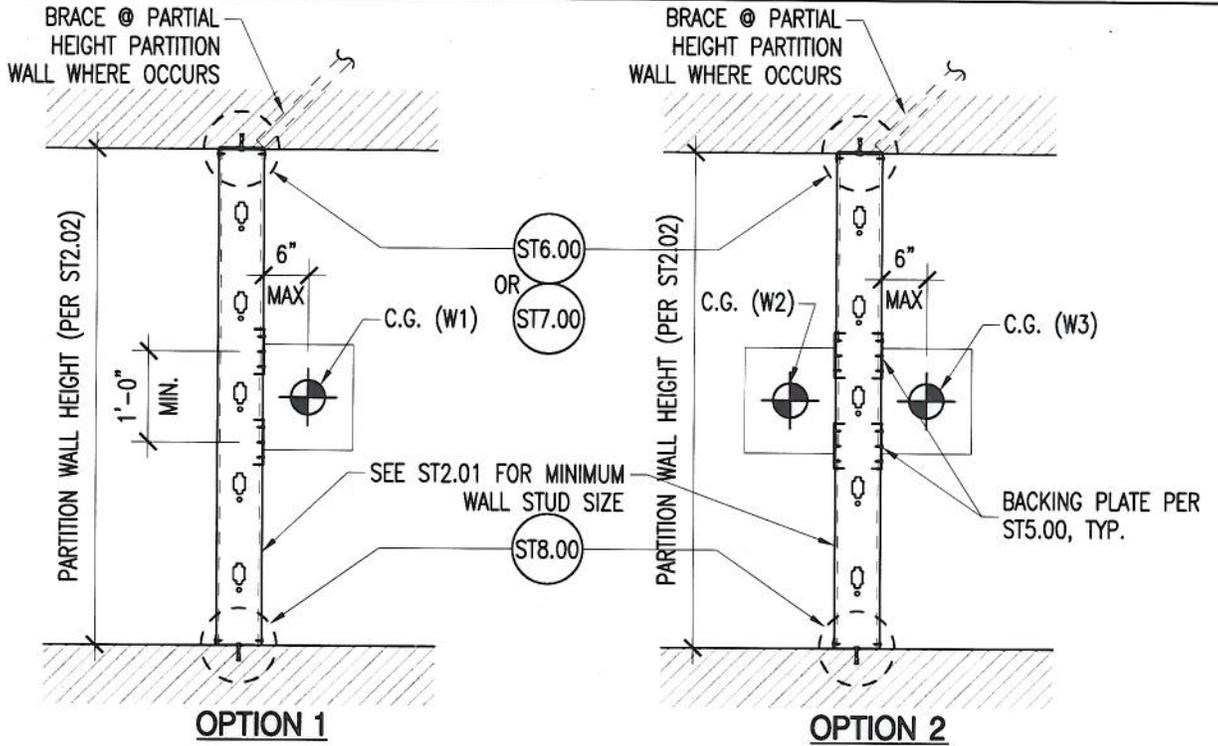

A PARTITION WALL CONDITION 'B'

NOTES:

1. THIS DETAIL APPLIES TO PARTITION WALLS SUPPORTING CABINETS OR EQUIPMENT THAT CONFORM TO THE REQUIREMENTS OF CONDITION 'B' PER ST2.00.
2. WHERE CABINETS OR EQUIPMENT OCCUR ON BOTH SIDES OF THE PARTITION WALL, EITHER OF THE FOLLOWING OPTIONS MAY BE USED:
 - A. DECREASE SPACING OF WALL STUDS, BOTTOM TRACK ANCHORAGE AND TOP TRACK ANCHORAGE BY 50% FROM THAT SHOWN ON ST2.02, ST6.00, ST7.00 & ST8.00 (I.E. PROVIDE TWICE THE QUANTITY OF WALL STUDS AND TOP AND BOTTOM TRACK ANCHORAGE).
 - B. LIMIT THE COMBINED WEIGHT OF CABINETS OR EQUIPMENT ON OPPOSITE SIDES OF WALL AS SHOWN IN OPTION 2.
 FOR EXAMPLE:
 $W1 = 50 \text{ LB/STUD MAX}$
 $W2 + W3 = 50 \text{ LB/STUD MAX}$
3. SEE ST2.01 FOR MINIMUM PARTITION WALL STUD SIZE.
4. FOR TYPICAL PARTITION WALL SECTIONS SEE ST2.02.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

CABINET OR EQUIPMENT ANCHORAGE TO PARTITION WALL, CONDITION 'B'


ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

ST2.03

PLOT DATE: Aug 15, 2011

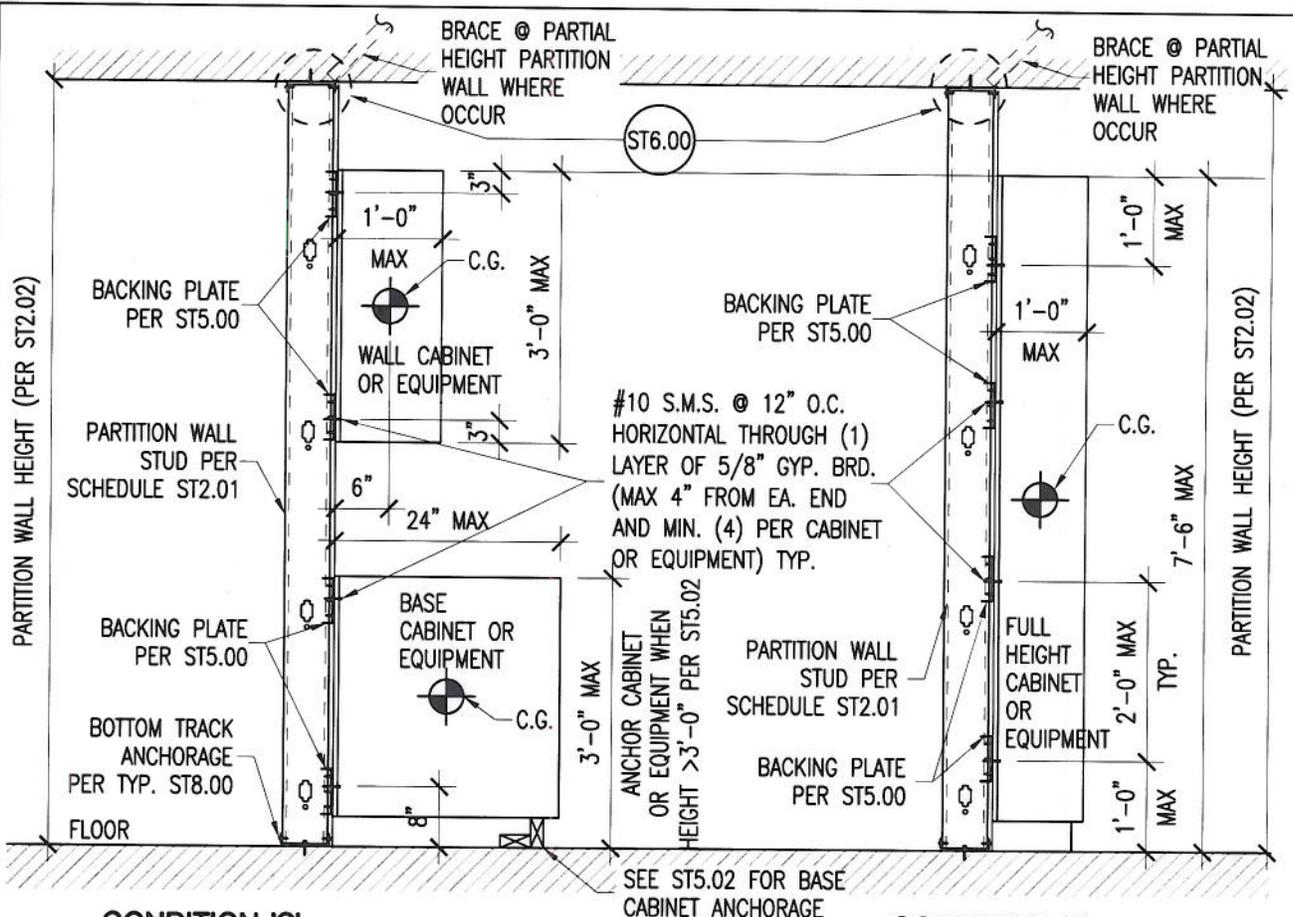

(B) CONDITION 'C' OVERHEAD AND / OR BASE CABINETS OR EQUIPMENT

(C) CONDITION 'D' FULL HEIGHT CABINETS OR EQUIPMENT

NOTES:

1. THIS DETAIL APPLIES TO PARTITION WALLS SUPPORTING CABINETS OR EQUIPMENT THAT CONFORM TO THE REQUIREMENTS OF CONDITION 'C' OR 'D' PER ST2.00.
2. THIS DETAIL APPLIES TO PARTITION WALLS SUPPORTING OVERHEAD AND/OR BASE CABINET OR EQUIPMENT ON ONE SIDE OF THE WALL. WHERE CABINETS OR EQUIPMENT OCCUR ON BOTH SIDES OF THE WALL, THE FOLLOWING OPTION MAY BE USED:
 - A. DECREASE SPACING OF WALL STUDS, BOTTOM TRACK ANCHORAGE AND TOP TRACK ANCHORAGE BY 50% FROM THAT SHOWN ON ST2.02, ST6.00, ST7.00 & ST8.00. (I.E. PROVIDE TWICE THE QUANTITY OF WALL STUDS AND TOP AND BOTTOM TRACK ANCHORAGE).
3. SEE ST2.01 FOR MINIMUM WALL STUD SIZE.
4. FOR TYPICAL PARTITION SECTIONS SEE ST2.02.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

CABINET OR EQUIPMENT ANCHORAGE TO PARTITION WALL, CONDITIONS 'C' & 'D'


ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

ST2.04

PLOT DATE: Aug 15, 2011

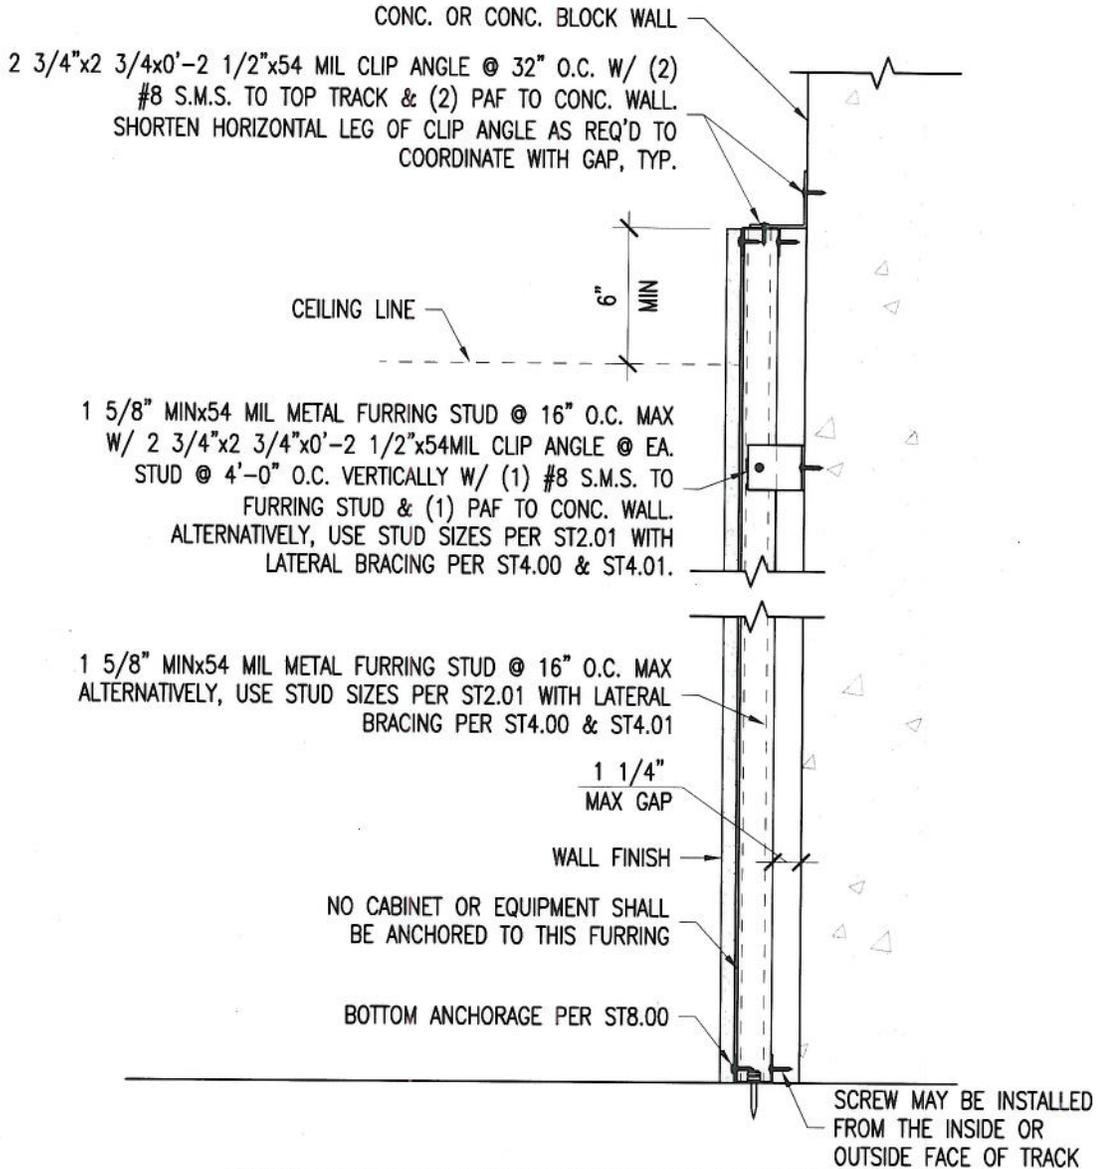

STUD FURRING ATTACHMENT TO CONCRETE OR CONCRETE BLOCK WALL

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS AND ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS OR ST1.09 & ST1.10 FOR SCREW ANCHOR REQUIREMENTS.
3. DETAIL IS LIMITED TO PARTITION WALL CONDITION 'A' PER ST2.00.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:

STUD FURRING ATTACHMENT TO CONCRETE OR CONCRETE BLOCK WALL

ST2.05

PLOT DATE: Aug 15, 2011

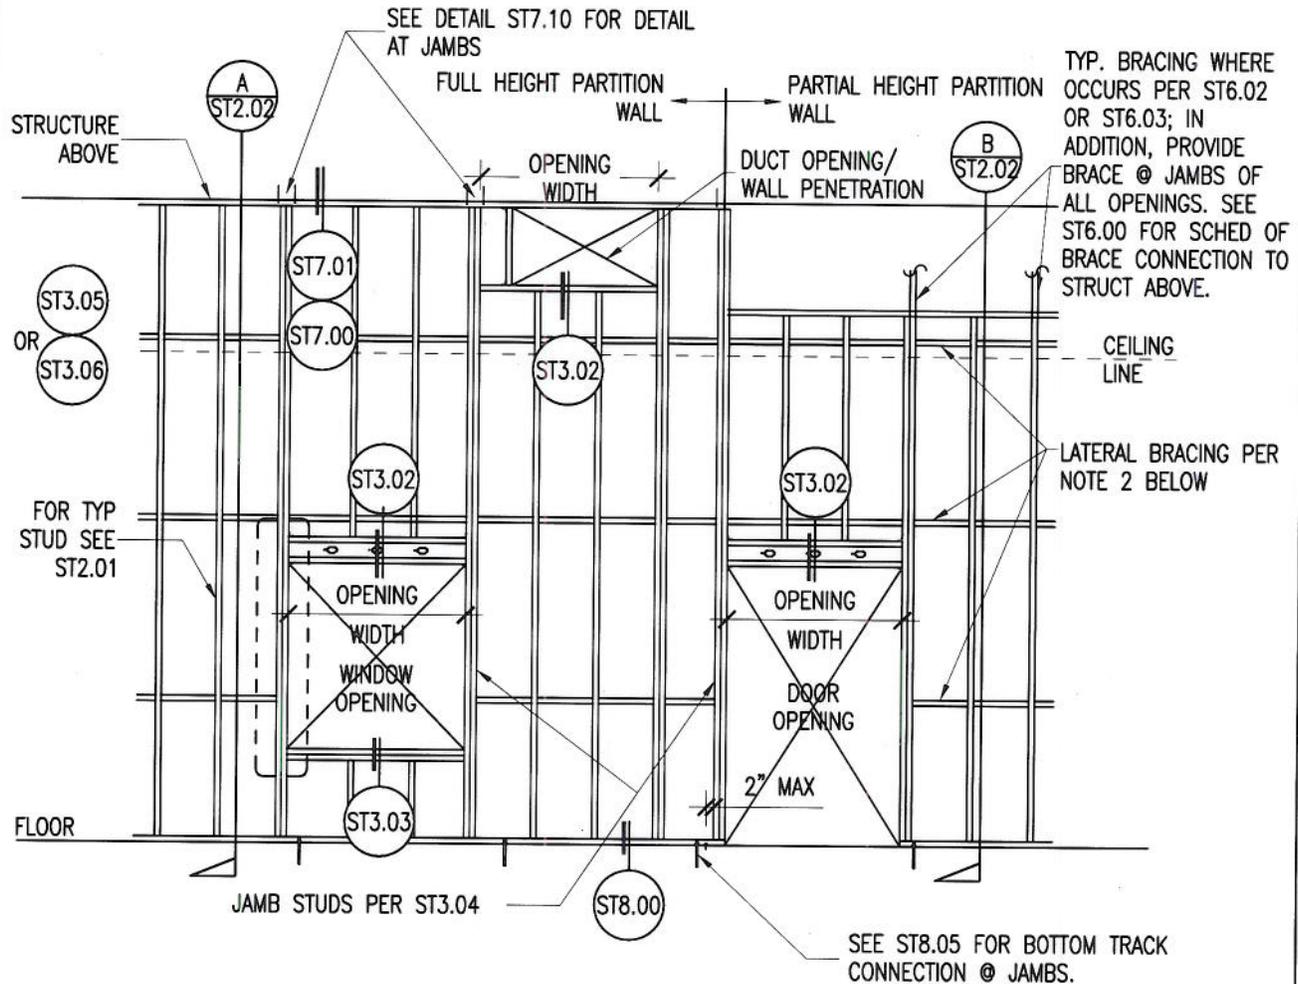

PARTITION WALL ELEVATION

NOTES:

1. ATTACHMENT OF CEILING, EQUIPMENT, ETC. TO THE JAMB, HEADER OR STUD ABOVE THE HEADER IS NOT PERMITTED WITHOUT THE APPROVAL OF THE RDP IN RESPONSIBLE CHARGE & OSHPD.
2. LATERAL BRACING PER ST4.00 & ST4.01 @ 4'-0" O.C. MAX. LATERAL BRACING NOT REQUIRED WHERE GYP. BOARD OCCURS ON BOTH SIDES OF PARTITION WALL. LATERAL BRACING NOT REQUIRED WHERE GYP. BOARD IS ON AT LEAST ONE FACE AND WALL LENGTH BETWEEN JAMB OR CORNER STUDS IS <=32" OR UNBRACED VERTICAL FRAMING IS <=48".
3. SEE ST2.07 FOR CONDITION AT OVERLAPPING OPENINGS.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:

PARTITION WALL ELEVATION - FULL HEIGHT AND PARTIAL HEIGHT PARTITION WALLS

ST2.06

PLOT DATE: Aug 15, 2011

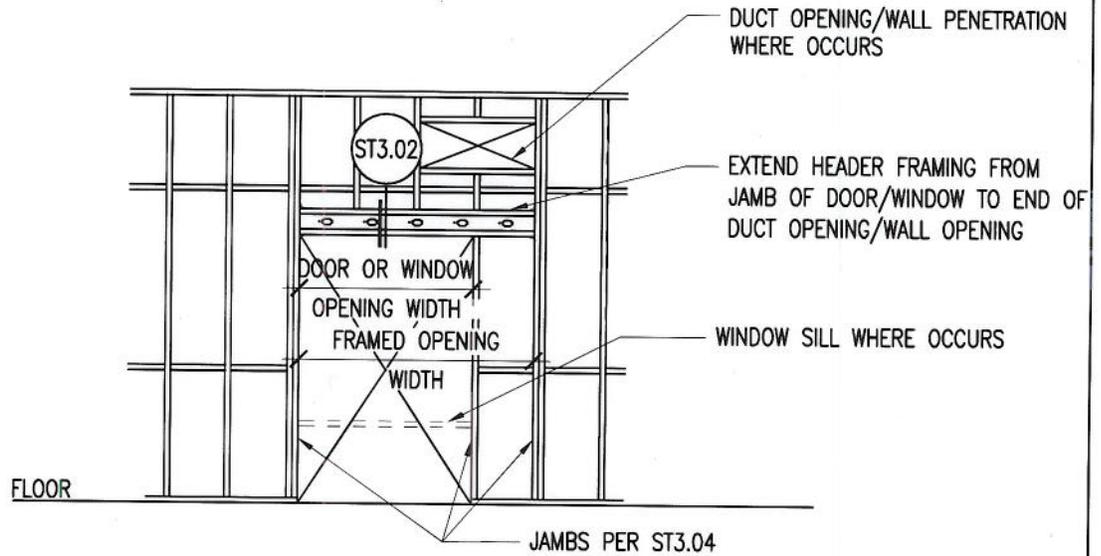

FRAMING AT OVERLAPPING OPENINGS

NOTES:

1. SEE ST2.06 FOR ADDITIONAL INFORMATION.
2. ATTACHMENT OF CEILING EQUIPMENT, ETC. TO THE JAMB, HEADER OR STUD ABOVE THE HEADER IS NOT PERMITTED WITHOUT THE APPROVAL OF THE RDP IN RESPONSIBLE CHARGE & OSHPD.



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**

OPD NO.:

REVISION: DATE:

SHEET TITLE:
**PARTITION WALL ELEVATION - FRAMING AT
OVERLAPPING OPENINGS**

ST2.07


PLOT DATE: Aug 15, 2011

PARTITION WALL OPENING FRAMING SCHEDULE

OPENING WIDTH	Sps	PARTITION WALL HT UP TO:	CONN. DETAIL	JAMBS (# OF STUD)-MIL			HEADER			SILL (SEE NOTE 3)		
				3 5/8" WALL	4" WALL	6" WALL	FRAMING	FIGURE	MIL	FRAMING	FIGURE	MIL
≤ 4'-0"	0.25-0.99	9'-0"	ST3.05-A OR ST3.05-B	(1)-33	(1)-33	(1)-33	(1)TRACK		SAME MIL AS WALL	(1)TRACK		33 MIN.
		12'-0"		(2)-33	(1)-54 OR (2)-33	(1)-54 OR (2)-33	(1)TRACK & (1) STUD		54			
		16'-0"		(2)-54	(2)-54	(2)-43	(1) STUD					
	1.00-1.25	9'-0"	ST3.05-A OR ST3.05-B	(1)-33	(1)-33	(1)-33	(1)TRACK		SAME MIL AS WALL	(1)TRACK		33 MIN.
		12'-0"		(2)-33	(2)-33	(1)-54 OR (2)-33	(1)TRACK & (1) STUD		54			
		16'-0"		(2)-54	(2)-54	(2)-43	(1) STUD					
	1.26-1.45	9'-0"	ST3.05-A OR ST3.05-B	(1)-33	(1)-33	(1)-33	(1)TRACK		SAME MIL AS WALL	(1)TRACK		33 MIN.
		12'-0"		(2)-33	(2)-33	(1)-54 OR (2)-33	(1)TRACK & (1) STUD		54			
		16'-0"		(2)-54	(2)-54	(2)-43	(1) STUD					
	1.45-1.95	9'-0"	ST3.05-A OR ST3.05-B	(1)-43 OR (2)-33	(1)-43 OR (2)-33	(1)-33	(1)TRACK		SAME MIL AS WALL	(1)TRACK		33 MIN.
		12'-0"		(2)-33	(2)-33	(1)-54 OR (2)-33	(1)TRACK & (1) STUD		54			
		16'-0"		(2)-54	(2)-54	(2)-43	(1) STUD					
SEE DETAIL: ST3.04				SEE DETAIL: ST3.02				SEE DETAIL: ST3.03				

NOTES:

- SEE GENERAL NOTES ON ST0.00, ST0.01, & ST0.02 FOR LIGHT GAUGE STEEL REQUIREMENTS AND DETAIL ST1.01 FOR SECTION PROFILES.
- STUDS SHALL MATCH WALL SIZES, I.E. 362S FOR 3 5/8" WALL, 400S FOR 4" WALL & 600S FOR 6" WALL.
- SCHEDULE FOR SILL BASED ON 4'-0" MAX HT. FOR SILLS TALLER THAN 4'-0" USE HEADER FRAMING.
- JAMB, HEADER & SILL DESIGN BASED ON PARTITION WALL CONDITION 'A' ON ST2.00 & THE FOLLOWING DESIGN ASSUMPTIONS:

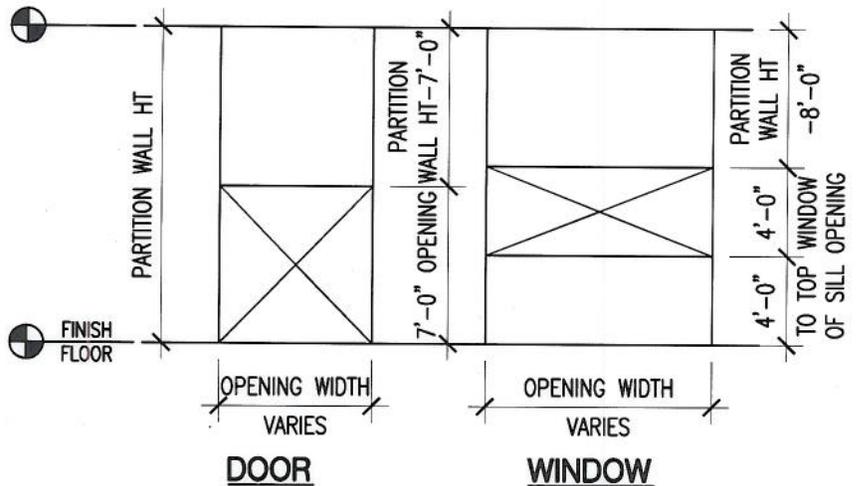

AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**

OPD NO.:

SHEET TITLE:
PARTITION WALL OPENING FRAMING SCHEDULE (4'-0" MAX OPENING WIDTH)

REVISION: DATE:

ST3.00

PLOT DATE: Aug 15, 2011

PARTITION WALL OPENING FRAMING SCHEDULE

OPENING WIDTH	S _{OS}	PARTITION WALL HT UP TO:	CONN. DETAIL	JAMBS (# OF STUD)-MIL			HEADER			SILL (SEE NOTE 3)		
				3 5/8" WALL	4" WALL	6" WALL	FRAMING	FIGURE	MIL	FRAMING	FIGURE	MIL
>4'-0" TO ≤10'-0"	0.25-0.99	9'-0"	ST3.06-C ST3.06-D OR ST3.06-E	(1)-54 OR (2)-33	(1)-54 OR (2)-33	(1)-43 OR (2)-33	(1)TRACK		54	(1)TRACK & (1)STUD		43 MIN.
		12'-0"		(2)-33	(2)-33	(2)-33	(2)TRACK &					
		16'-0"		(2)-54	(2)-54	(2)-43	(2) STUD					
	1.00-1.25	9'-0"	ST3.06-C ST3.06-D OR ST3.06-E	(1)-54 OR (2)-33	(1)-54 OR (2)-33	(1)-43 OR (2)-33	(2)TRACK		54	(1)TRACK & (1)STUD		43 MIN.
		12'-0"		(2)-43 OR (3)-33	(2)-43 OR (3)-33	(2)-33	(2)TRACK &					
		16'-0"		(3)-54	(2)-43 OR (3)-33	(2)-43	(2) STUD					
	1.26-1.45	9'-0"	ST3.06-C ST3.06-D OR ST3.06-E	(1)-54 OR (2)-33	(1)-54 OR (2)-33	(1)-43 OR (2)-33	(2)TRACK		54	(1)TRACK & (1)STUD		43 MIN.
		12'-0"		(2)-43 OR (3)-33	(2)-43 OR (3)-33	(2)-33	(2)TRACK &					
		16'-0"		(3)-54	(2)-54	(2)-43	(2) STUD					
	1.45-1.95	9'-0"	ST3.06-C ST3.06-D OR ST3.06-E	(2)-33	(2)-33	(1)-54 OR (2)-33	(2)TRACK		54	(1)TRACK & (1)STUD		43 MIN.
		12'-0"		(2)-43 OR (3)-33	(2)-43 OR (3)-33	(2)-33	(2)TRACK &					
		16'-0"		(3)-54	(3)-54	(2)-43	(2) STUD					
				SEE DETAIL: ST3.04			SEE DETAIL: ST3.02			SEE DETAIL: ST3.03		

NOTES:

1. SEE GENERAL NOTES ON ST0.00, ST0.01 & ST0.02 FOR LIGHT GAUGE STEEL REQUIREMENTS AND DETAIL ST1.01 FOR SECTION PROFILES.
2. STUDS SHALL MATCH WALL SIZES, I.E. 362S FOR 3 5/8" WALL, 400S FOR 4" WALL & 600S FOR 6" WALL.
3. SCHEDULE FOR SILL BASED ON 4'-0" MAX HT. FOR SILLS TALLER THAN 4'-0" USE HEADER FRAMING.
4. SEE ST3.00 FOR DESIGN ASSUMPTIONS.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**


OPD NO.:

REVISION: DATE:

SHEET TITLE:
**WALL OPENING FRAMING SCHEDULE
(OPENING WIDTH 4'-0" TO 10'-0" MAX)**


ST3.01

PLOT DATE: Aug 15, 2011

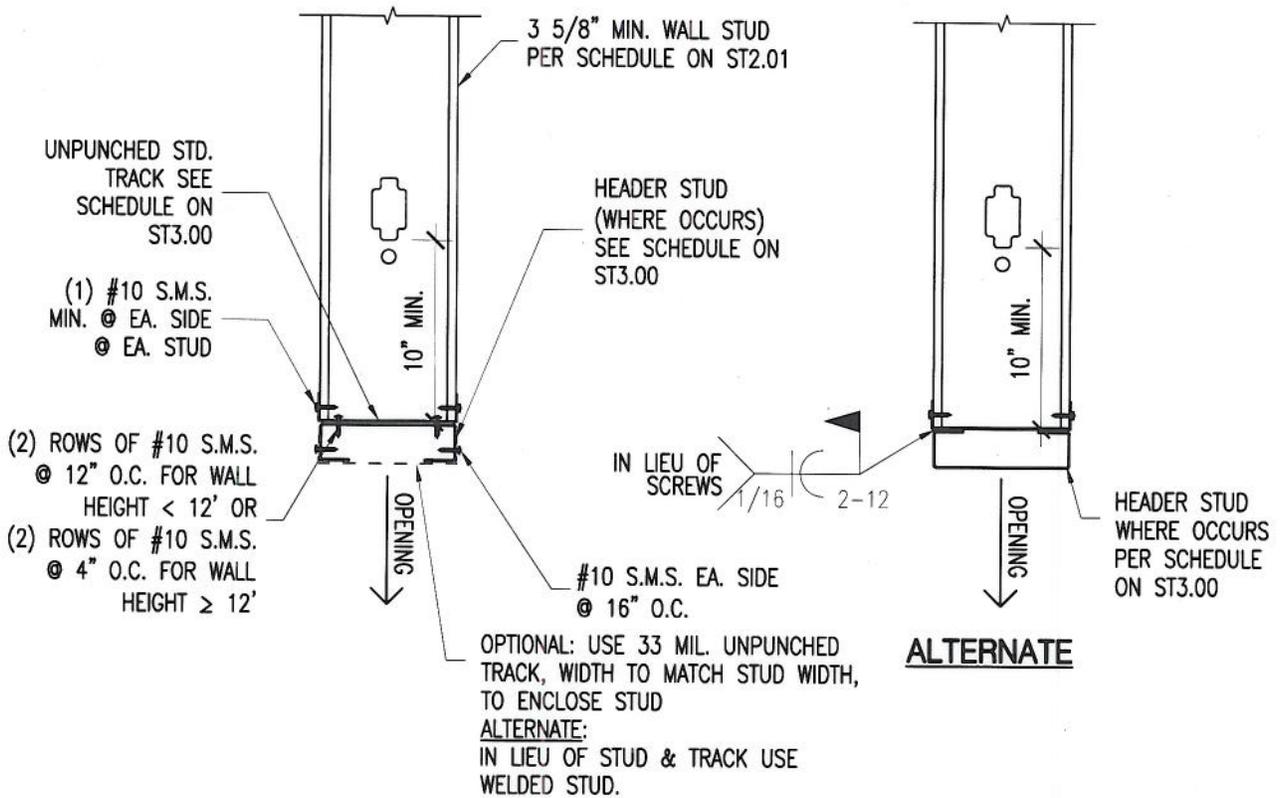

A HEADER AT OPENING 4'-0" MAX

NOTE:
 1. ATTACHMENT OF CEILING, EQUIPMENT, ETC. TO THE HEADER OR STUDS ABOVE THE HEADER IS NOT PERMITTED WITHOUT THE APPROVAL OF THE RDP IN RESPONSIBLE CHARGE & OSHPD.

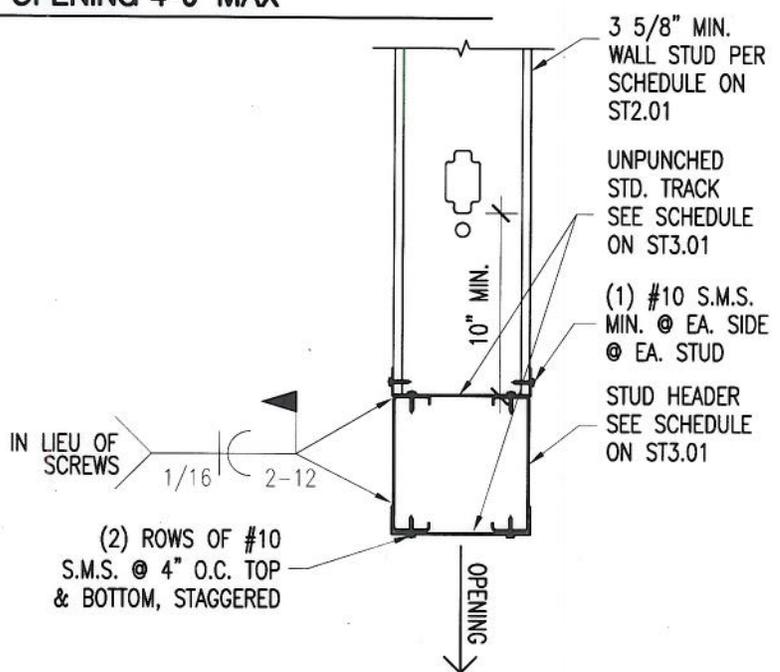


B HEADER AT OPENING 4'-0" TO 10'-0" MAX


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR
APPROVED


 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP		
CODE: 2007 CBC		
SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: HEADER SECTION	REVISION:	DATE:
		ST3.02

PLOT DATE: Aug 15, 2011

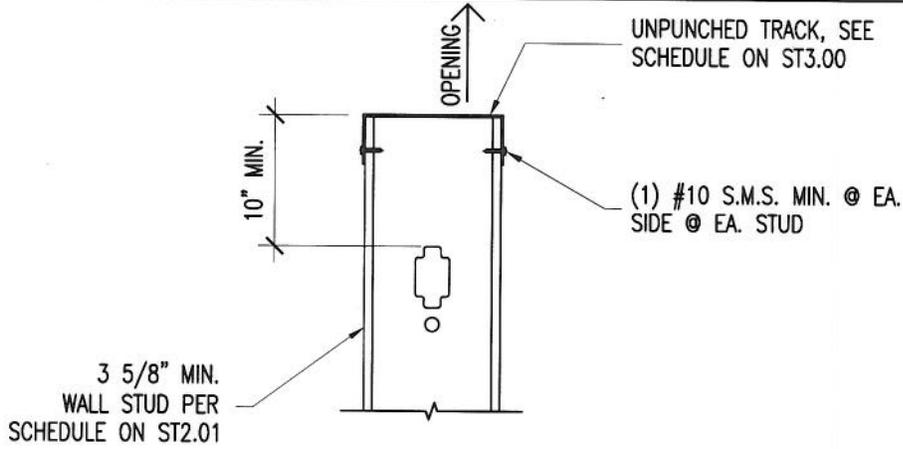

A SILL AT OPENING 4'-0" MAX

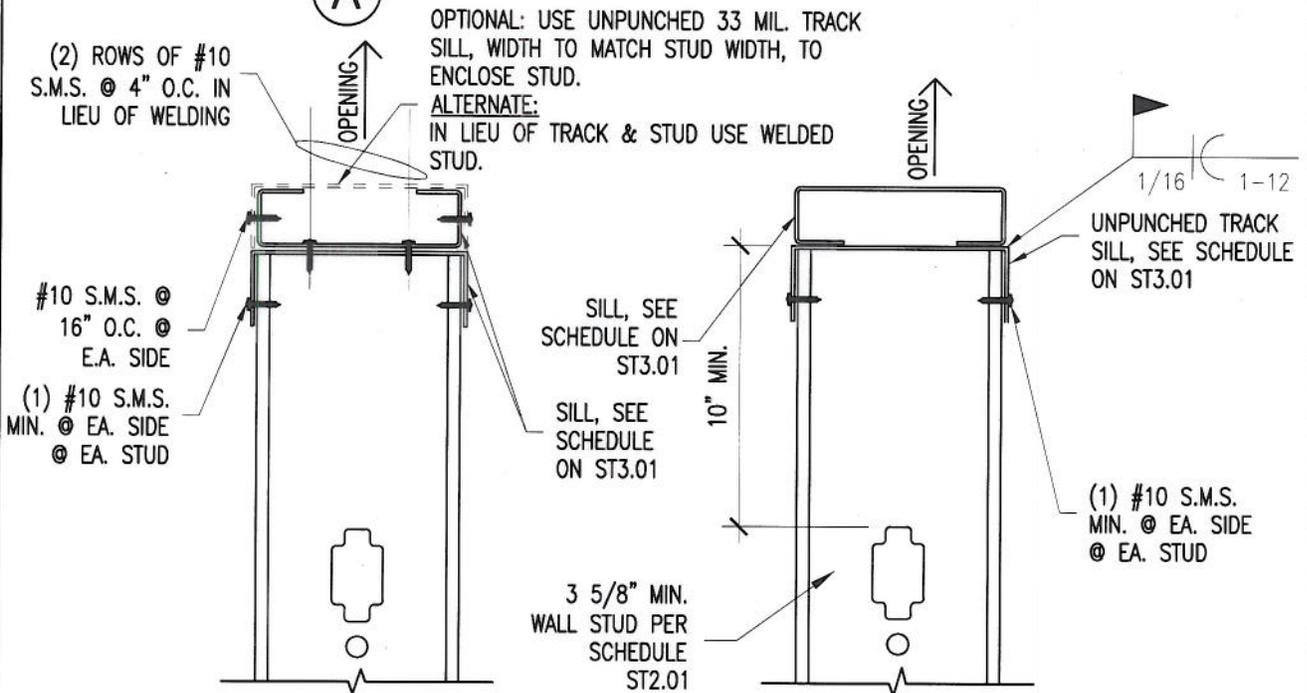

ALTERNATE

B SILL AT OPENING 4'-0" TO 10'-0" MAX



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11


OPD NO.:

REVISION: DATE:


SHEET TITLE:

SILL SECTION

ST3.03

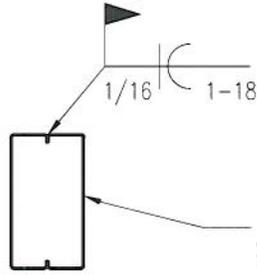

DOUBLE STUD
PER SCHEDULE
ST3.00 & ST3.01




TRACK THICKNESS TO
MATCH JAMB STUDS
(4" MAX DEPTH)


#10 S.M.S. @ 6" TYP.
O.C.

A DOUBLE JAMB STUD DETAIL

B DOUBLE JAMB STUD DETAIL
(ALTERNATE)

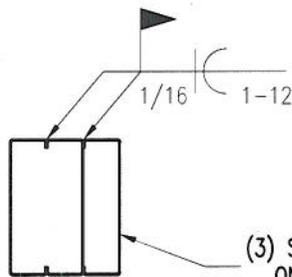

(3) STUDS PER SCHEDULE
ON ST3.00 & ST3.01



TRACK THICKNESS TO
MATCH JAMB STUDS
(4" MAX DEPTH)

#10 S.M.S. @ 6" TYP.
O.C.

C TRIPLE JAMB STUD DETAIL

D TRIPLE JAMB STUD DETAIL
(ALTERNATE)

NOTES:

1. WHERE (2) STUDS ARE INDICATED ON PLANS OR ELEVATIONS, USE DOUBLE STUD DETAIL A OR B ABOVE. WHERE (3) STUDS ARE INDICATED ON PLANS OR ELEVATIONS, USE TRIPLE STUD DETAIL C OR D ABOVE.
2. FOR STUD THICKNESSES, SEE SCHEDULE ON ST3.00 & ST3.01.



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

JAMB STUD DETAILS

ST3.04

PLOT DATE: Aug 15, 2011

CUT TRACK FLANGE & BEND WEB TO FORM 1 1/4" RETURN AT TOP OF HEADER

CRIPPLE WALL STUD

#10 S.M.S. TYP.

HEADER, SEE SCHEDULE ON ST3.00

CUT STUD FLANGE & BEND WEB TO FORM 1 1/4" RETURN AT BOTTOM OF HEADER

SILL, SEE SCHEDULE ON ST3.00

CUT TRACK FLANGE & BEND WEB. SEE HEADER CONDITION.

JAMB STUD, SEE SCHEDULE ON ST3.00

CRIPPLE WALL STUD

(2) #10 S.M.S. TYP.

#10 S.M.S. TYP.
HEADER, SEE SCHEDULE ON ST3.00

IN LIEU OF S.M.S. AT CLIP TO JAMB & HEADER/ SILL, TYP

1/16" 1 1/2"

54 MIL 1 1/2"x1 1/2"x STUD WIDTH CLIP, TYP

SILL, SEE SCHEDULE ON ST3.00

(2) #10 S.M.S. EA. LEG, TYP

A 4'-0" MAX OPENING WIDTH

B 4'-0" MAX OPENING WIDTH ALTERNATE CONNECTION



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

HEADER & SILL CONNECTION TO JAMB STUDS (4'-0" MAX OPENING WIDTH)


ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:


ST3.05

PLOT DATE: Aug 15, 2011

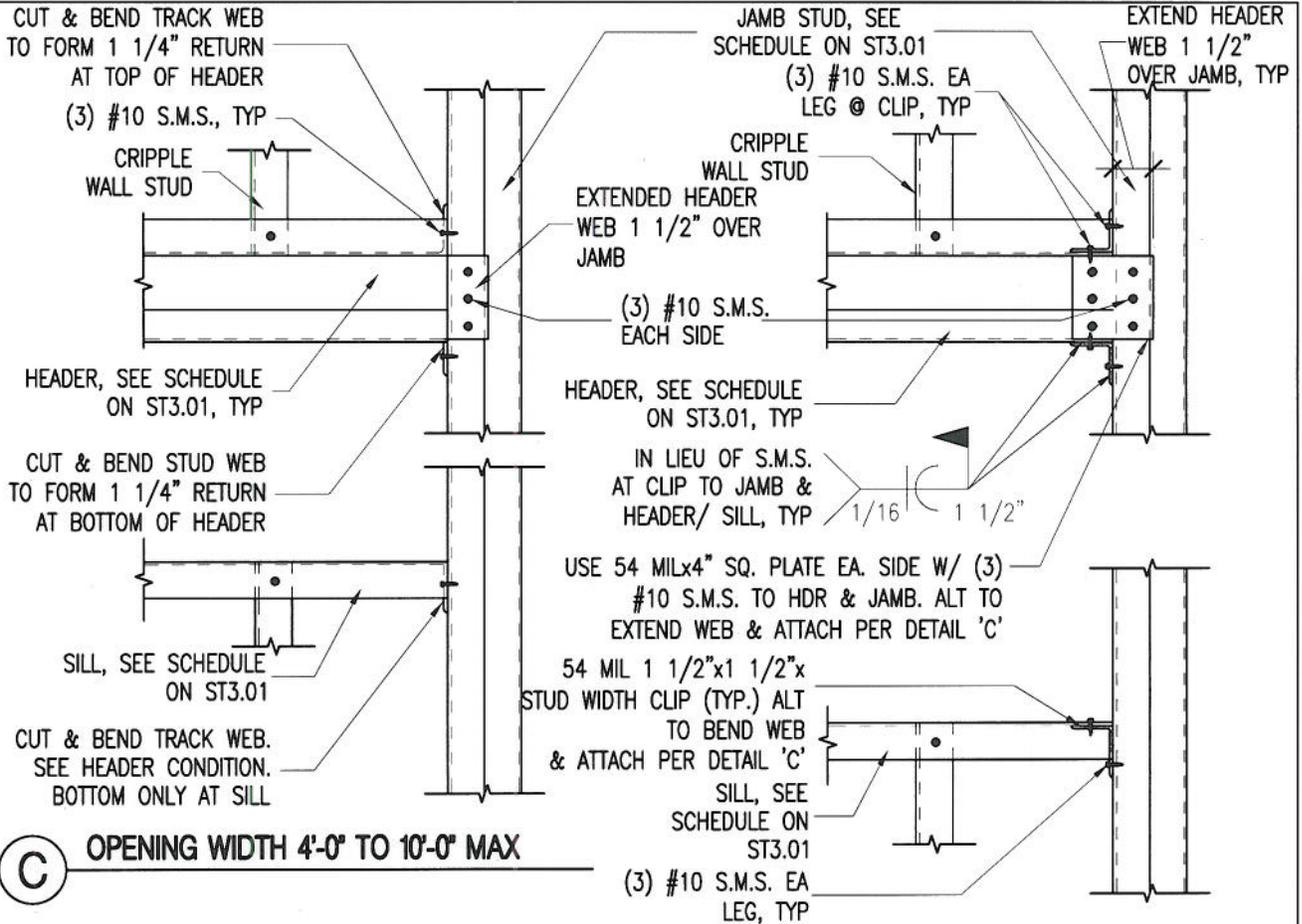


C OPENING WIDTH 4'-0" TO 10'-0" MAX

D OPENING WIDTH 4'-0" TO 10'-0" MAX
ALTERNATE CONNECTION 1

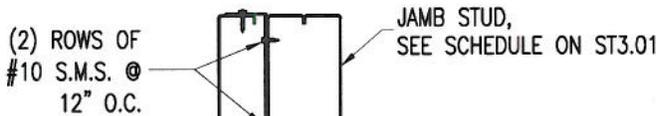

1 DETAIL

CRIDDLE STUD AND TRACK TIGHT AGAINST HEADER ABOVE

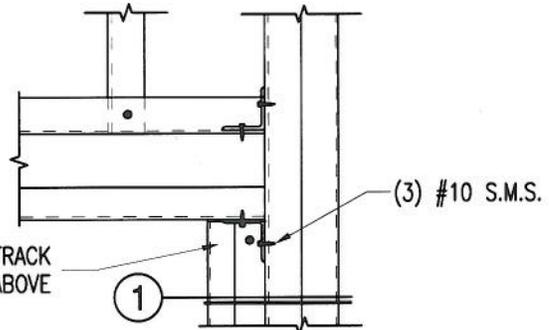

1

REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

[Signature]

Office of Statewide Health Planning & Development FACILITIES DEVELOPMENT DIVISION

E FOR OPENING WIDTH 4'-0" TO 10'-0" MAX
ALTERNATE CONNECTION 2 - AT DOOR HEADERS

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE: STANDARD PARTITION WALL DETAILS


ISSUE DATE: 08/15/11
REVISION: DATE:

OPD NO.:


SHEET TITLE: HEADER & SILL CONNECTION TO JAMB STUDS (OPENING WIDTH 4'-0" TO 10'-0" MAX)

ST3.06

PLOT DATE: Aug 15, 2011

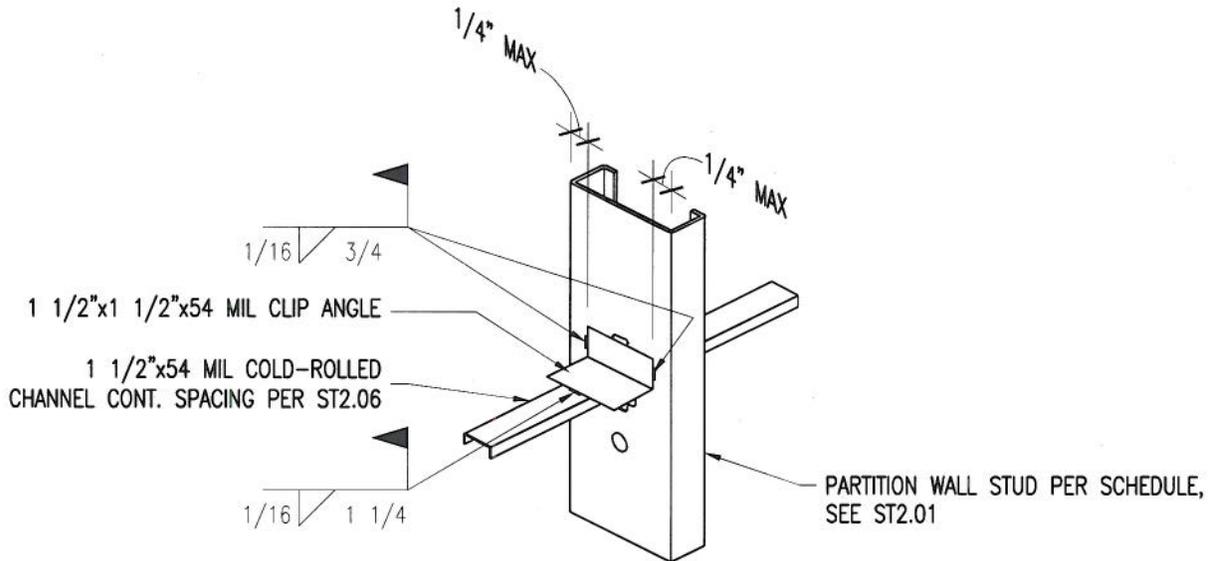

METAL STUD LATERAL BRACING TYPE 1 - OPTION 1

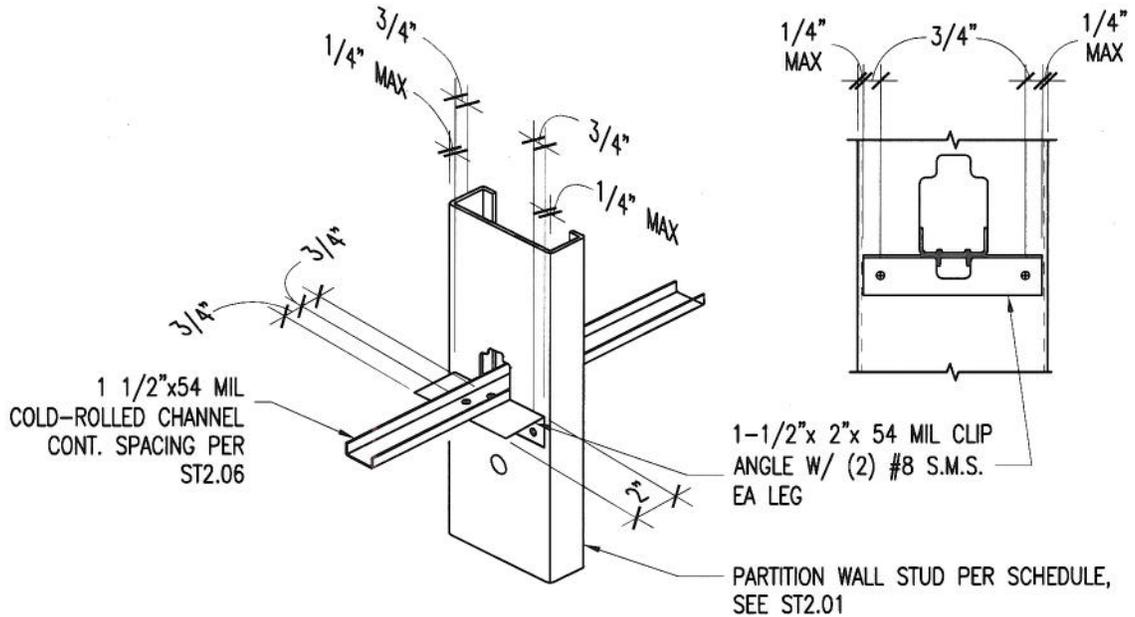

METAL STUD LATERAL BRACING TYPE 1 - OPTION 2

NOTES:

1. LATERAL BRACING IS NOT REQUIRED WHERE GYP. BOARD IS INSTALLED ON BOTH SIDES OF PARTITION WALL.
2. NOTCHING OR CUTTING OF COLD-ROLLED CHANNEL IS NOT PERMITTED FOR ANY CONDITION.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

METAL STUD LATERAL BRACING TYPE 1


ISSUE DATE: 08/15/11

REVISION: DATE:


OPD NO.:

ST4.00

PLOT DATE: Aug 15, 2011

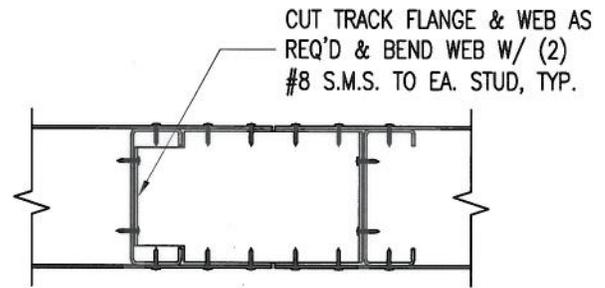

PLAN

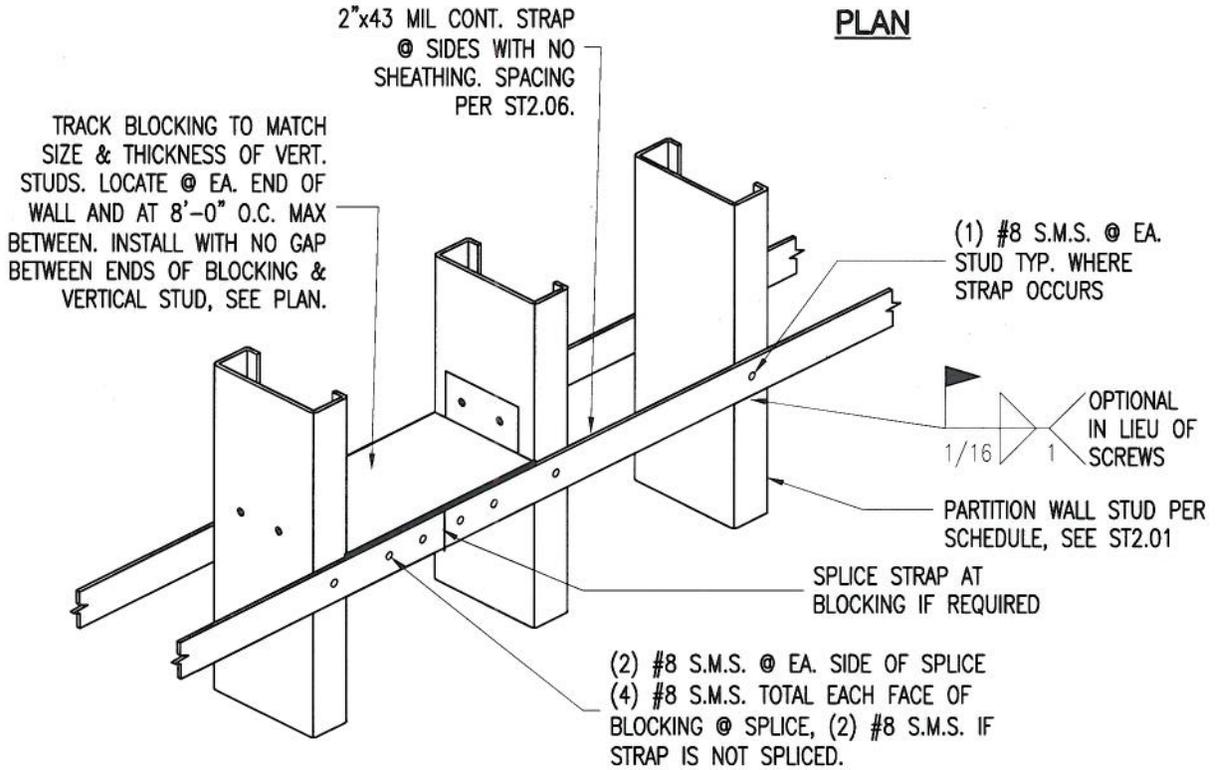

METAL STUD LATERAL BRACING TYPE 2

NOTES:

1. LATERAL BRACING IS NOT REQUIRED WHERE GYP. BOARD IS INSTALLED ON BOTH SIDES OF PARTITION WALL.
2. NOTCHING OF BLOCKING OR STRAP IS NOT PERMITTED FOR ANY CONDITION.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE:

08/15/11

REVISION:

DATE:


OPD NO.:

SHEET TITLE:

METAL STUD LATERAL BRACING TYPE 2

ST4.01


PLOT DATE: Aug 15, 2011

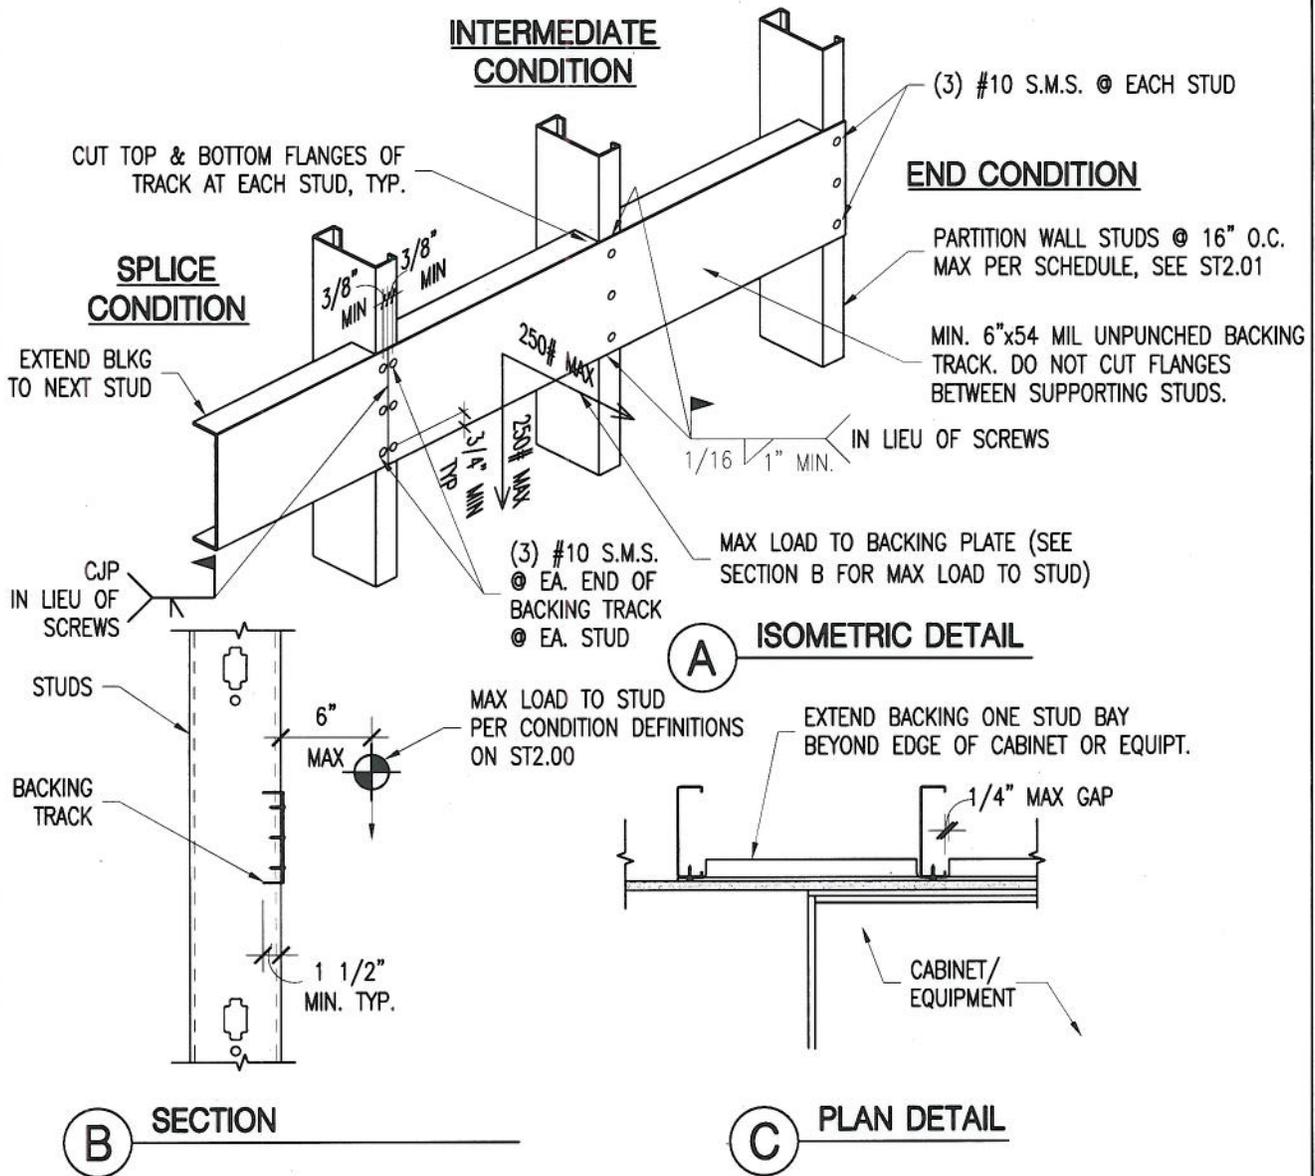

BACKING PLATE DETAIL TYPE 1

NOTES:

1. BACKING FOR CABINETS OR EQUIPMENT EXCEEDING THIS LIMIT SHALL BE DESIGNED AND DETAILED BY RDP IN RESPONSIBLE CHARGE.
2. ST5.01 MAY BE USED FOR ATTACHMENT OF CABINETS OR EQUIPMENT DISTRIBUTING LESS THAN 20# PER STUD (CENTER OF GRAVITY LESS THAN 6" FROM FACE OF STUD).
3. NOTCHING OR CUTTING OF BACKING PLATE IS NOT PERMITTED EXCEPT AS SHOWN.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:
2007 CBC


SECTION TITLE:
STANDARD PARTITION WALL DETAILS

SHEET TITLE:
BACKING PLATE DETAIL TYPE 1

ISSUE DATE: **08/15/11**

REVISION:	DATE:

OPD NO.:
ST5.00

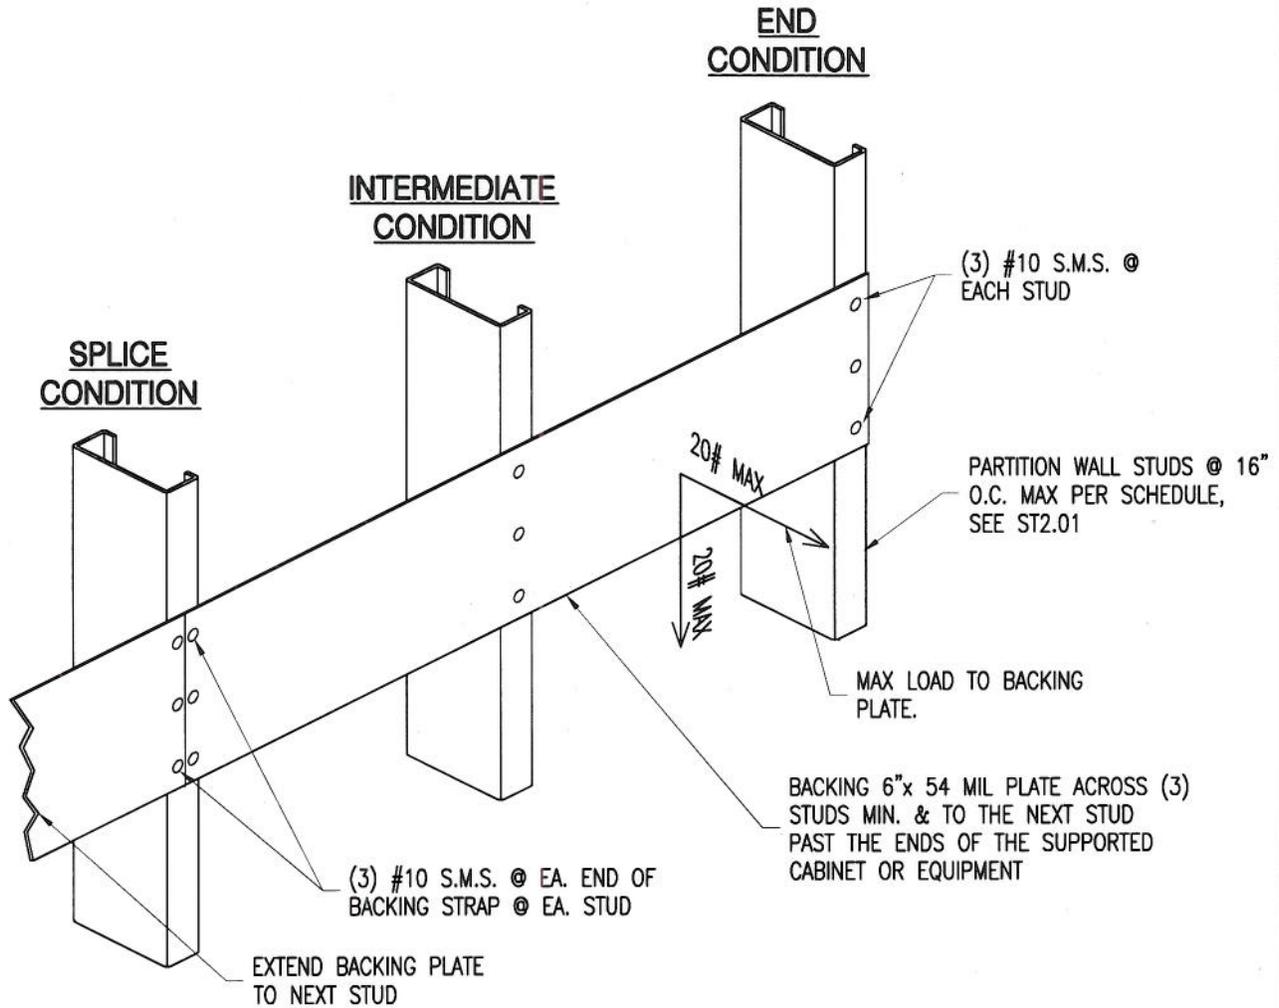

BACKING PLATE DETAIL TYPE 2

NOTES:

1. THIS DETAIL MAY BE USED FOR ATTACHMENT OF CABINETS OR EQUIPMENT DISTRIBUTING LESS THAN 20# PER STUD (CENTER OF GRAVITY LESS THAN 6" FROM FACE OF STUD).
2. SEE ST5.00 FOR ALTERNATE WELDING OPTION.
3. NOTCHING OR CUTTING OF BACKING PLATE IS NOT PERMITTED.



REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED



Office of Statewide Health Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**


OPD NO.:

REVISION: DATE:


SHEET TITLE:
BACKING PLATE DETAIL TYPE 2

ST5.01


PLOT DATE: Aug 15, 2011

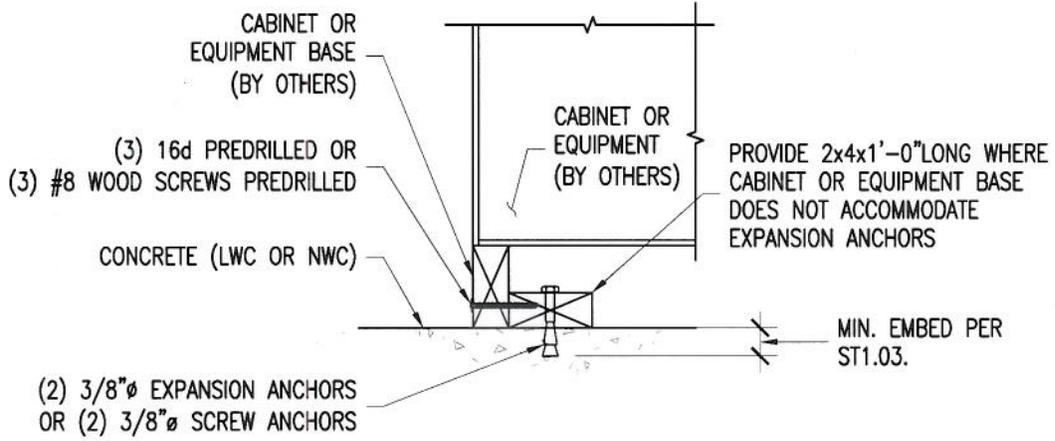

A ANCHOR DETAIL

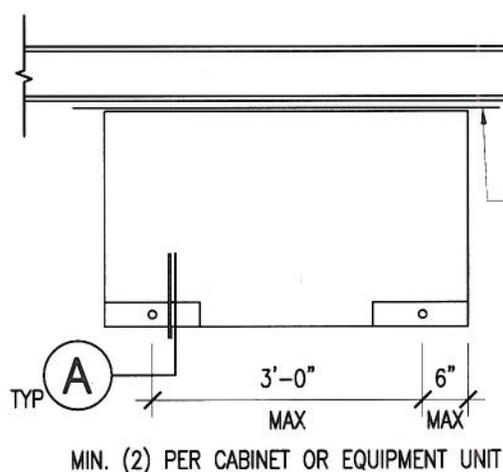

1 ANCHOR LAYOUT OPTION - 1

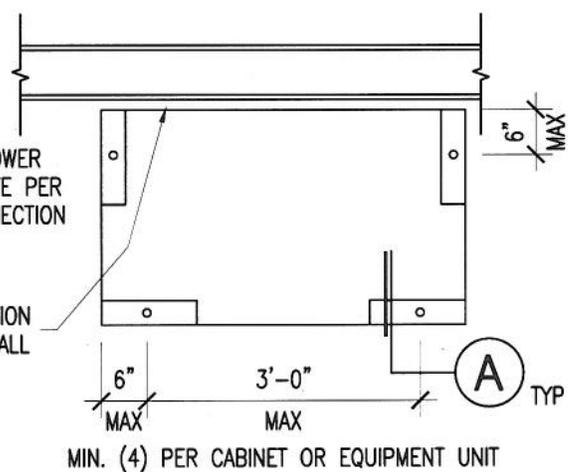

2 ANCHOR LAYOUT OPTION - 2

NOTE:
 1. SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS, AND SEE ST1.09 & ST1.10 FOR SCREW ANCHOR REQUIREMENTS.

REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED .

Office of Statewide Health Planning & Development FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE: 2007 CBC

SECTION TITLE: STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

SHEET TITLE: BASE CABINET OR EQUIPMENT ANCHORAGE

ST5.02

REVISION:	DATE:

PLOT DATE: Aug 15, 2011

TOP CONNECTION CONDITIONS - PARTIAL HEIGHT PARTITION WALL

STRUCTURE ABOVE TOP TRACK	PARTIAL HEIGHT PARTITION WALL-BRACE TO STRUCTURE CONNECTION
LIGHT WEIGHT (MIN. 3000 PSI) CONCRETE FILLED METAL DECK	ST6.04
NORMAL WEIGHT (MIN. 3000 PSI) CONCRETE SLAB OR BEAM SOFFIT	ST6.05
CONCRETE PAN JOIST OR WAFFLE SLAB SYSTEM	ST6.06
METAL ROOF DECK WITHOUT CONCRETE FILL	ST6.07
STEEL BEAM	ST6.08 & ST6.09
WOOD FRAMING	ST6.10

NOTES:

1. SEE ST6.02 & ST6.03 FOR TYPICAL DETAILS OF CEILING HEIGHT PARTITION WALLS WITH A TOP TRACK CONNECTION BRACED TO THE STRUCTURE ABOVE. SEE ST6.01 FOR BRACE SPACING, SIZE AND CONNECTION SCHEDULE.
2. SEE ST7.00 FOR FULL HEIGHT PARTITION WALLS.
3. FOR TOP & BOTTOM CONNECTION DEMAND SCHEDULE SEE ST6.11.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

TOP CONNECTION CONDITIONS - PARTIAL HEIGHT PARTITION WALL

ST6.00

PLOT DATE: Aug 15, 2011

PARTIAL HEIGHT PARTITION WALL BRACE SPACING, SIZE AND CONNECTION SCHEDULES

PARTITION WALL CONDITION 'A' DETAIL ST6.02

S _{ps}	MAX BRACE SPACING (FT)	BRACE SIZE AND MIL			S.M.S. CONNECTIONS AT BRACE ENDS	
		3 5/8"	4"	6"	BOTTOM OF BRACE (TO TOP TRACK)	TOP OF BRACE (AT CONNECTION TO STRUCTURE)
0.25-0.99	10	43	43	43	(4) #10 S.M.S.	(4) #10 S.M.S.
1.00-1.25	9.33	54	43	43	(5) #10 S.M.S. OR (4) #12 S.M.S.	(4) #10 S.M.S.
1.26-1.45	8.75	54	54	43	(5) #10 S.M.S.	(4) #10 S.M.S.
1.46-1.95	7	--	54	43	(5) #10 S.M.S.	(4) #10 S.M.S.

PARTITION WALL CONDITION 'B' DETAIL ST6.02

S _{ps}	MAX BRACE SPACING (FT)	BRACE SIZE AND MIL			S.M.S. CONNECTIONS AT BRACE ENDS	
		3 5/8"	4"	6"	BOTTOM OF BRACE (TO TOP TRACK)	TOP OF BRACE (AT CONNECTION TO STRUCTURE)
0.25-0.99	8	54	54	43	(5) #10 S.M.S.	(4) #10 S.M.S.
1.00-1.25	7	--	54	54	(6) #10 S.M.S. OR (5) #12 S.M.S.	(4) #10 S.M.S.
1.26-1.45	6.5	--	--	54	(6) #10 S.M.S. OR (5) #12 S.M.S.	(4) #10 S.M.S.
1.46-1.95	5.33	--	--	54	(6) #10 S.M.S.	(4) #10 S.M.S.

PARTITION WALL CONDITION 'C' AND 'D' DETAIL ST6.03

S _{ps}	MAX BRACE SPACING (FT)	BRACE SIZE AND MIL (2) 3 5/8" BACK TO BACK	NUMBER OF S.M.S. AT TOP AND BOTTOM OF BRACE
0.25-0.99	6.67	43	(8) #10 S.M.S.
1.00-1.25	6	54	(8) #10 S.M.S.
1.26-1.45	5.5	54	(8) #10 S.M.S.
1.46-1.95	4.5	54	(8) #10 S.M.S.

NOTES:

1. THESE TABLES ARE BASED ON THE FOLLOWING DESIGN CRITERIA:
 - A. DEMAND LOADS PER ST6.11.
 - B. 9 FT MAX PARTITION WALL HEIGHT.
 - C. 12 FT MAX BRACE LENGTH.
2. RDP IN RESPONSIBLE CHARGE SHALL DESIGN FOR OTHER CONDITIONS.



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

**PARTIAL HEIGHT PARTITION WALL BRACE
SPACING, SIZE AND CONNECTION
SCHEDULES**


ISSUE DATE: **08/15/11**

REVISION: DATE:



OPD NO.:

ST6.01


PLOT DATE: Aug 15, 2011

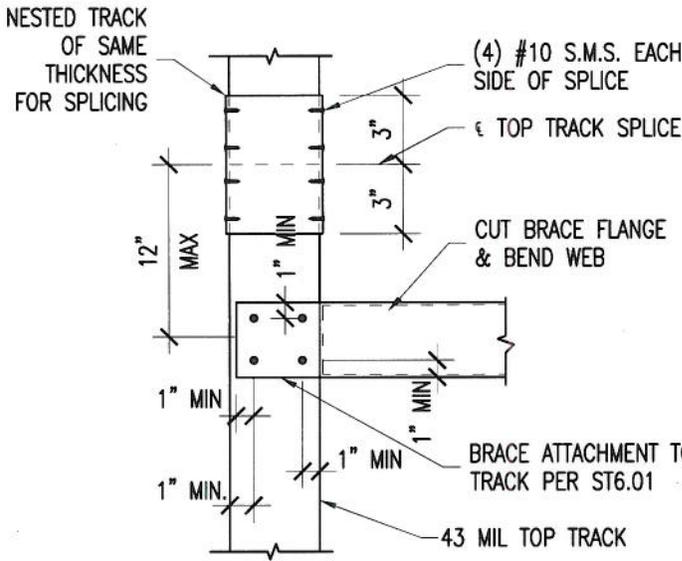

B PLAN VIEW OF BRACE TO TOP TRACK

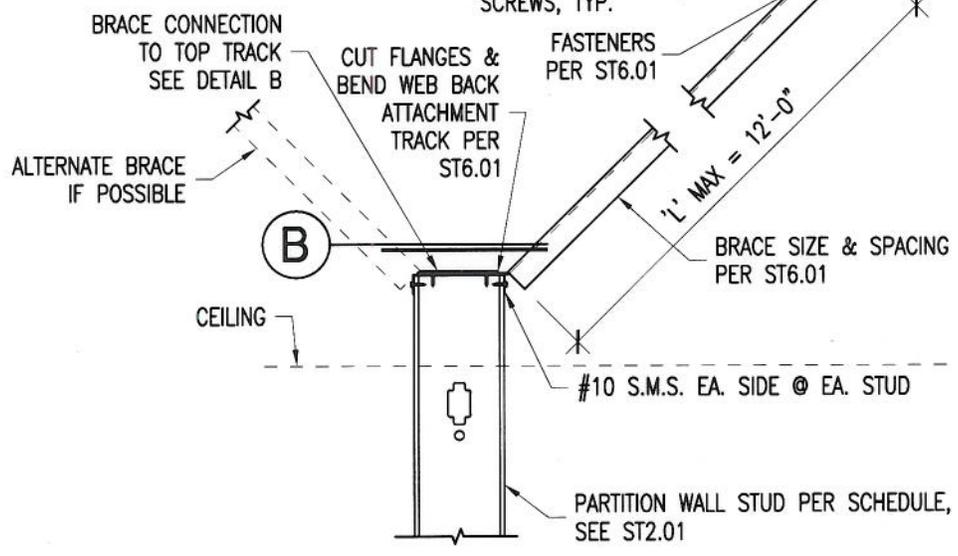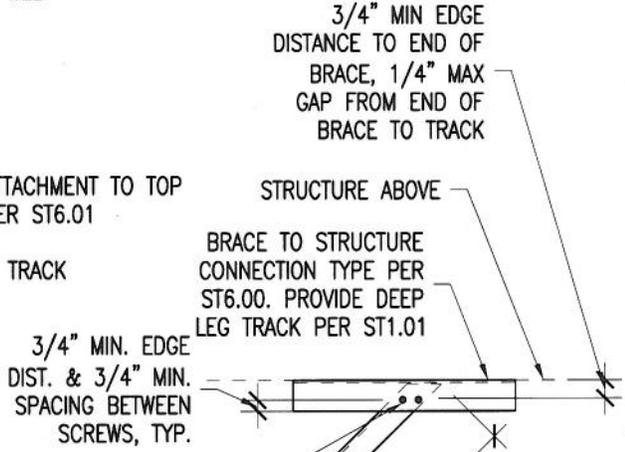

A PARTIAL HEIGHT PARTITION WALL



 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED,

 Office of Statewide Health Planning & Development FACILITIES DEVELOPMENT DIVISION

- NOTES:**
1. SEE TOP & BOTTOM CONNECTION DEMAND SCHEDULE ON ST6.11.
 2. SEE ST2.00 FOR DEFINITION OF PARTITION WALL CONDITIONS.
 3. DETAIL APPLIES TO PARTITION WALL CONDITIONS 'A' & 'B', ALL S₀₅ CATEGORIES.

AGENCY STAMP		ISSUE DATE: 08/15/11		OPD NO.: ST6.02
CODE: 2007 CBC		REVISION:	DATE:	
SECTION TITLE: STANDARD PARTITION WALL DETAILS				
SHEET TITLE: PARTIAL HEIGHT PARTITION WALL TOP BRACING - PARTITION WALL CONDITIONS 'A' & 'B'				


PLOT DATE: Aug 15, 2011

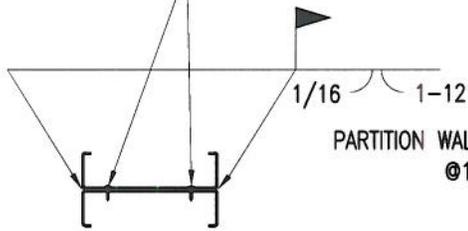(2) #10 S.M.S. @ 6" O.C.
IN LIEU OF WELDING




1 SECTION
(2) BACK-TO-BACK STUDS

54 MIL TOP TRACK

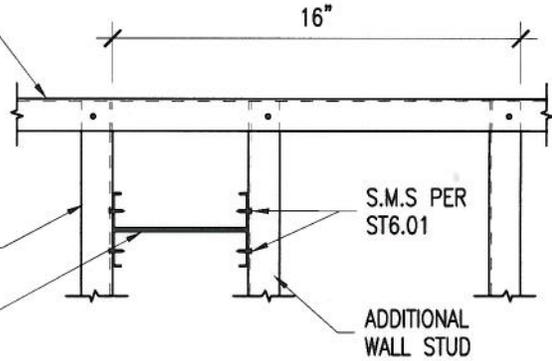

2 ELEVATION

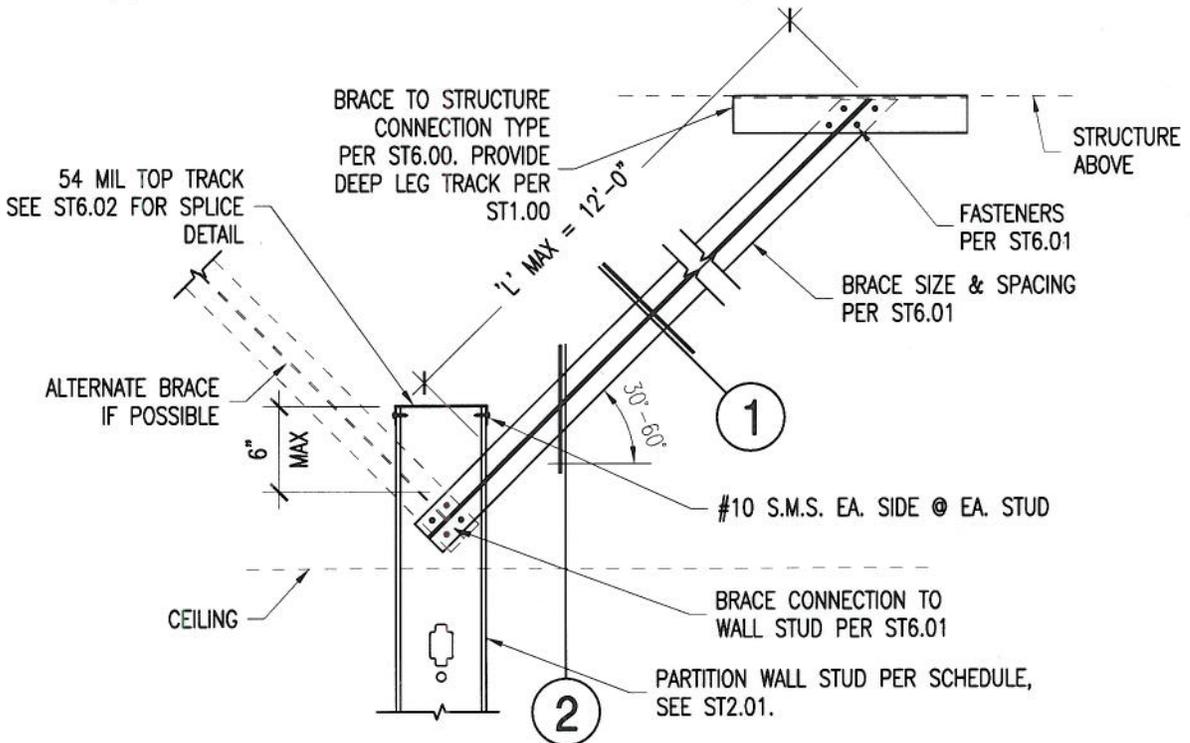

A PARTIAL HEIGHT PARTITION WALL


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

NOTES:

1. SEE TOP & BOTTOM CONNECTION SCHEDULE ON ST6.11.
2. SEE ST2.00 FOR DEFINITION OF PARTITION WALL CONDITIONS.
3. DETAIL APPLIES TO PARTITION WALL CONDITIONS 'C' & 'D', ALL S_{DS} CATEGORIES.

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:


OPD NO.:

SHEET TITLE:

PARTIAL HEIGHT PARTITION WALL TOP
BRACING, - PARTITION WALL CONDITIONS
'C' & 'D'



ST6.03

PLOT DATE: Aug 15, 2011

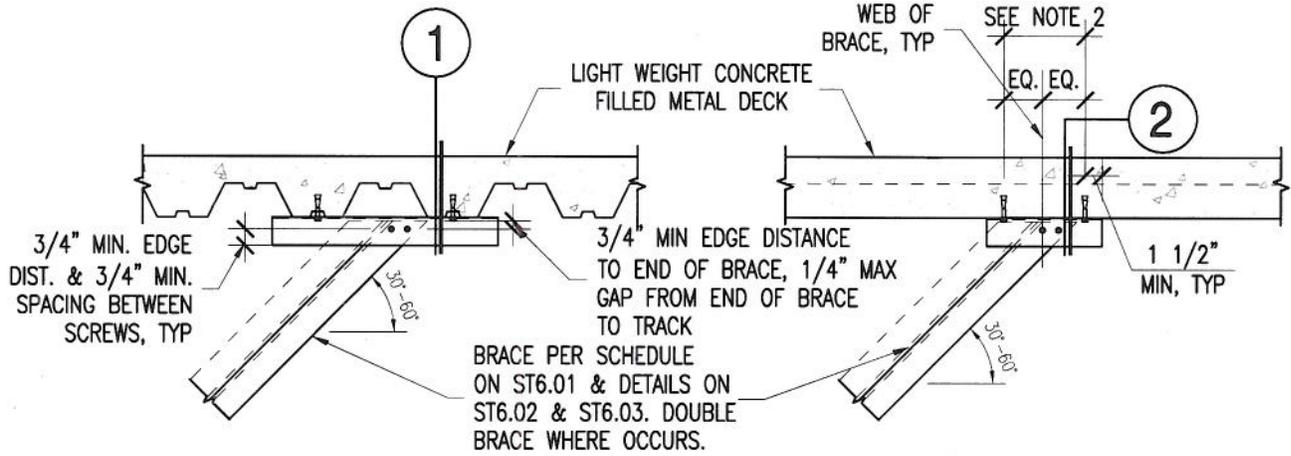

A BRACE PERPENDICULAR TO FLUTE OF DECK

B BRACE PARALLEL TO FLUTE OF DECK

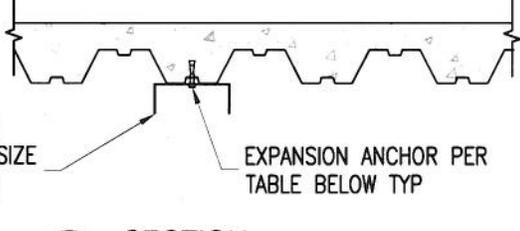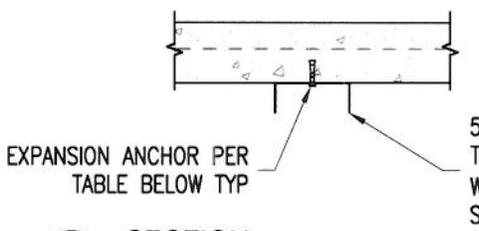

1 SECTION

2 SECTION

BRACE ANCHORAGE TO CONCRETE FILLED METAL DECK

S _{DS}	PARTITION WALL TYPE	EXPANSION ANCHOR QUANTITY, SIZE AND EMBED
0.25 TO 1.95	CONDITION 'A' & 'B'	(2) 3/8"Ø WITH 2" EMBED
0.25 TO 1.95	CONDITION 'C' & 'D'	(2) 5/8"Ø WITH 4" EMBED

- NOTES:
- SEE TOP & BOTTOM CONNECTION DEMAND SCHEDULE ON ST6.11.
 - SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
 - DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS


ISSUE DATE: 08/15/11
REVISION: DATE:

OPD NO.:

SHEET TITLE:
BRACE CONNECTION TO CONCRETE FILLED METAL DECK - ALL PARTITION WALL CONDITIONS

ST6.04

PLOT DATE: Aug 15, 2011

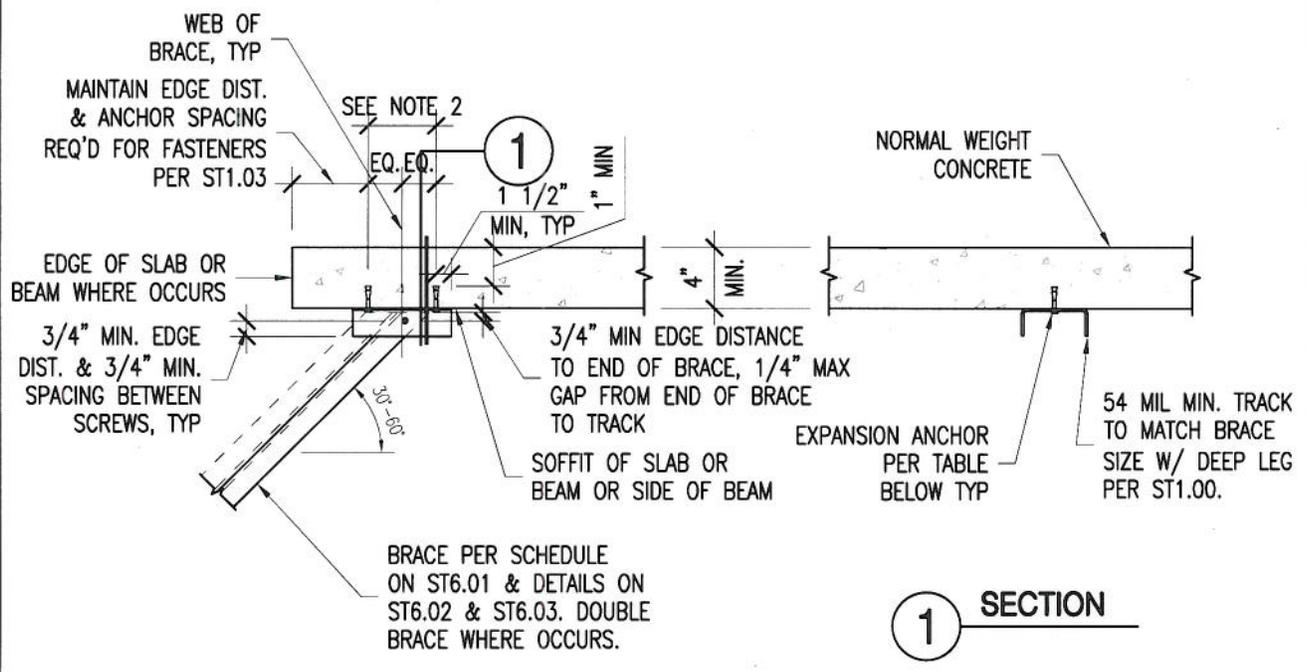

A BRACE TO CONC. SLAB OR BEAM SOFFIT

BRACE ANCHORAGE TO CONCRETE SLAB OR BEAM SOFFIT

S _{ps}	PARTITION WALL TYPE	EXPANSION ANCHOR QUANTITY, SIZE AND EMBED
0.25 TO 1.95	CONDITION 'A' & 'B'	(2) 3/8"φ WITH 2" EMBED
0.25 TO 1.95	CONDITION 'C' & 'D'	(2) 1/2"φ WITH 3 1/4" EMBED

- NOTES:**
1. SEE TOP & BOTTOM CONNECTION DEMAND SCHEDULE ON ST6.11.
 2. SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
 3. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{ps} CATEGORIES.




AGENCY STAMP

CODE: 2007 CBC

SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: BRACE CONNECTION TO CONCRETE SLAB OR BEAM SOFFIT - ALL PARTITION WALL CONDITIONS	REVISION: DATE:	ST6.05

PLOT DATE: Aug 15, 2011

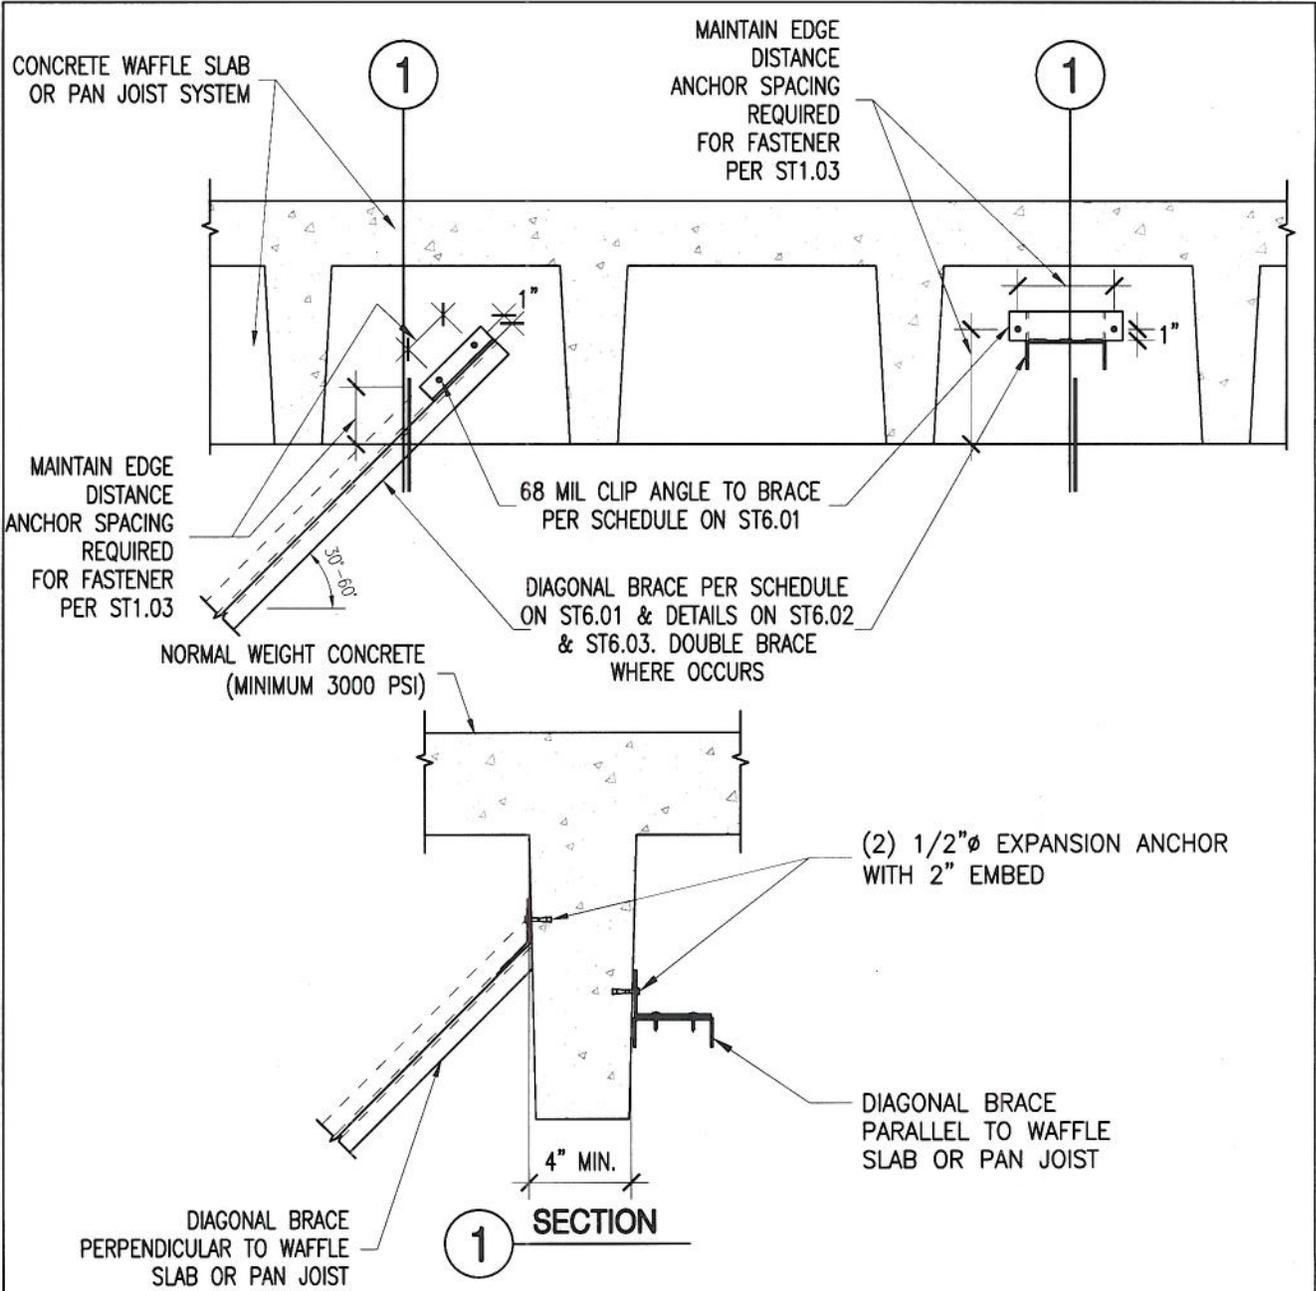



 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

- NOTES:**
1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
 2. SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
 3. RDP IN RESPONSIBLE CHARGE SHALL VERIFY LOADS IMPOSED ON JOISTS.
 4. PRIOR TO ANCHOR INSTALLATION, REINFORCING/ PRESTRESSING BAR LOCATIONS SHALL BE DETERMINED BY NON-DESTRUCTIVE TESTING.
 5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{D5} CATEGORIES.



AGENCY STAMP		ISSUE DATE: 08/15/11		OPD NO.: ST6.06
CODE: 2007 CBC		REVISION:	DATE:	
SECTION TITLE: STANDARD PARTITION WALL DETAILS				
SHEET TITLE: BRACE CONNECTION TO CONCRETE PAN JOIST OR WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS				

PLOT DATE: Aug 15, 2011

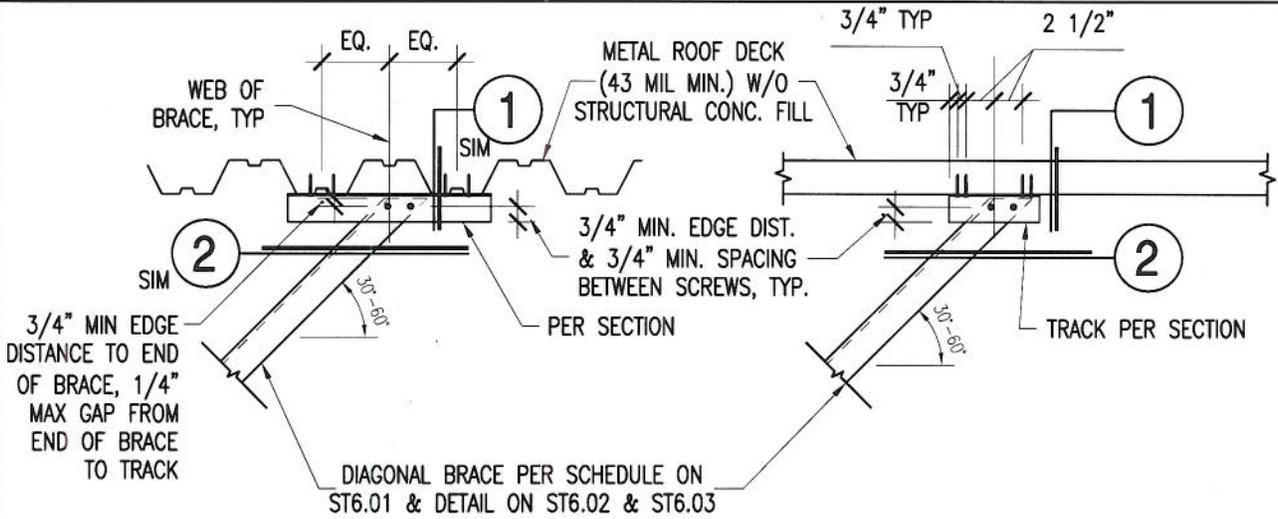

A BRACE PERPENDICULAR TO FLUTE OF DECK

B BRACE PARALLEL TO FLUTE OF DECK

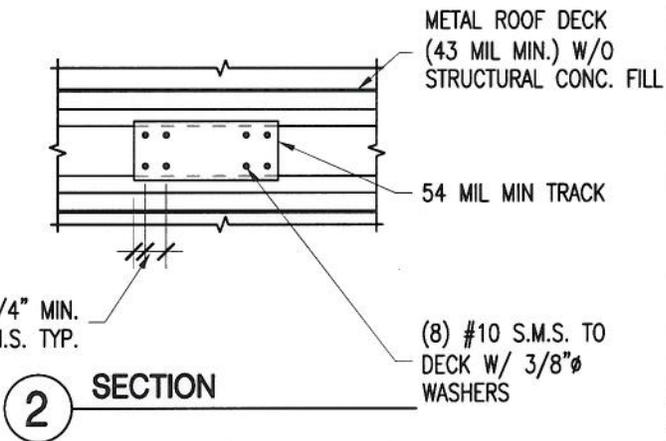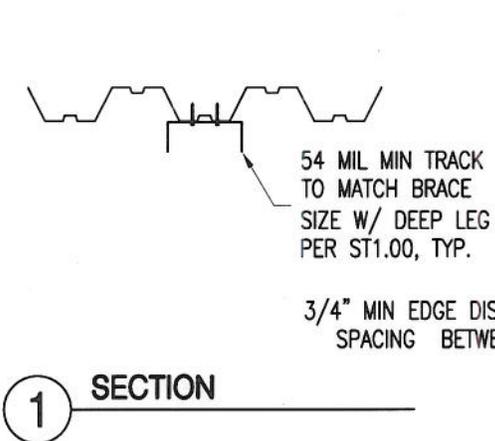

NOTES:

1. RDP IN RESPONSIBLE CHARGE TO PROVIDE CALCULATION FOR OSHPD REVIEW JUSTIFYING THE ABILITY OF METAL DECK TO SUPPORT THE REACTIONS FROM BRACE. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11 FOR BRACE REACTIONS.
2. THIS DETAIL IS APPLICABLE ONLY FOR PARTITION WALL CONDITIONS 'A' & 'B', ALL S_{PS} CATEGORIES.
3. RDP IN RESPONSIBLE CHARGE TO EVALUATE PARTITION WALL BRACING FOR CONDITIONS 'C' & 'D', ALL S_{PS} CATEGORIES.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:


OPD NO.:

SHEET TITLE:

BRACE CONNECTION TO METAL ROOF DECK WITHOUT STRUCTURAL CONCRETE FILL, - PARTITION WALL CONDITIONS 'A' & 'B'


ST6.07

PLOT DATE: Aug 15, 2011

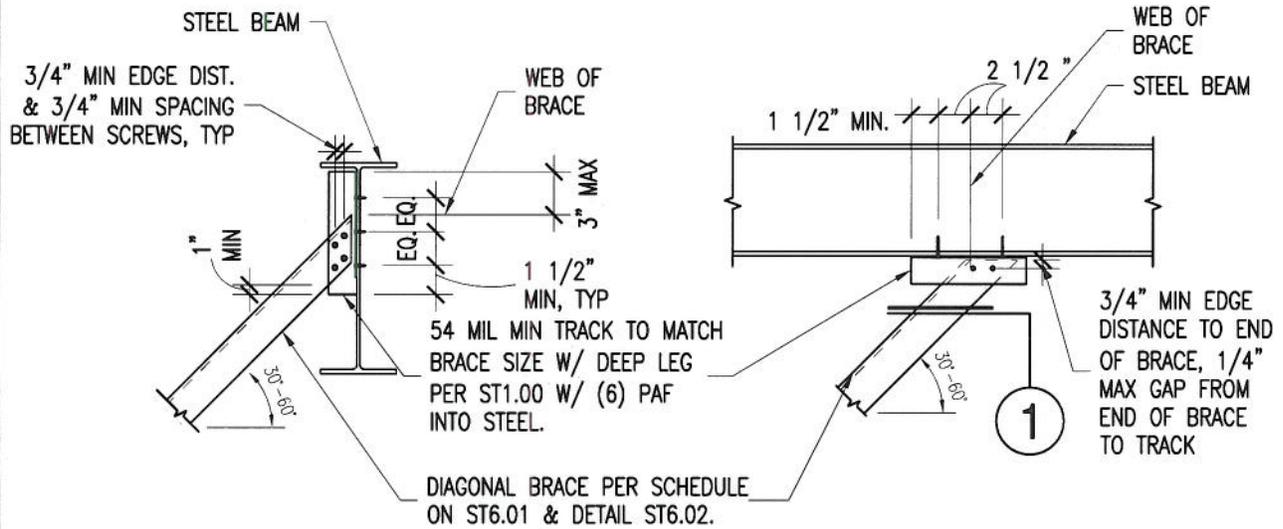

A PERPENDICULAR TO STEEL BEAM

B BRACE PARALLEL TO STEEL BEAM

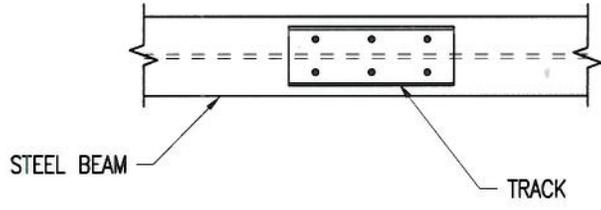

1 SECTION

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.05 FOR PAF REQUIREMENTS.
3. THIS DETAIL IS APPLICABLE ONLY FOR PARTITION WALL CONDITIONS 'A' & 'B', ALL S_{DS} CATEGORIES.
4. STEEL BEAM FLANGE & WEB MINIMUM THICKNESS = 3/16".
5. RDP IN RESPONSIBLE CHARGE, IOR AND CONTRACTOR TO VERIFY THAT NO PDF IS INSTALLED IN THE PROTECTED ZONE OF ANY STEEL MEMBER, SEE ANSI/AISC 341-05, SECTION 7.4.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:


OPD NO.:

SHEET TITLE:

BRACE CONNECTION TO STEEL BEAM, -
 PARTITION WALL CONDITIONS 'A' & 'B'


ST6.08

PLOT DATE: Aug 15, 2011

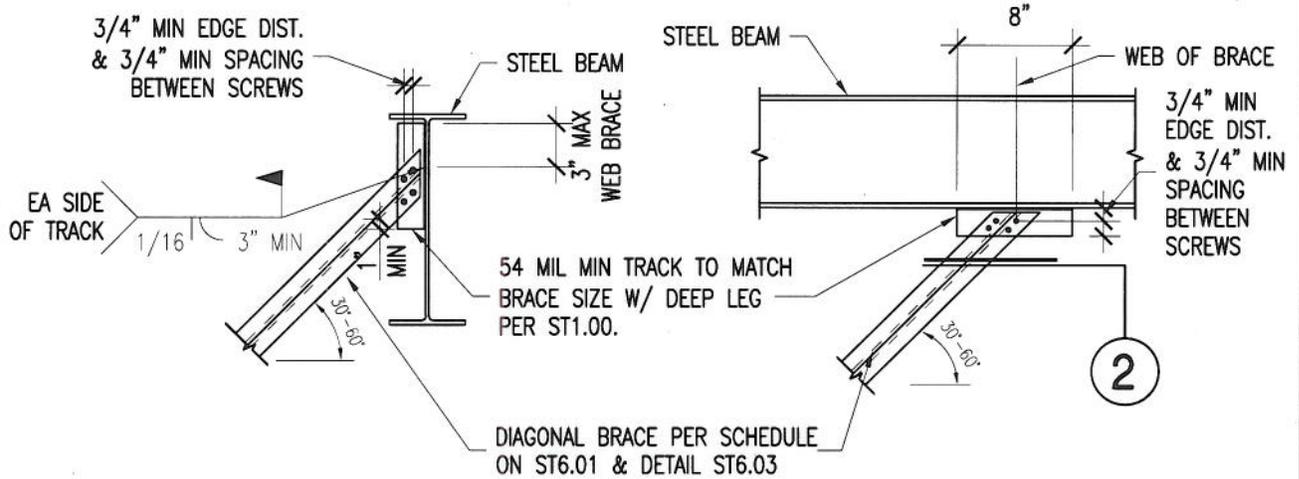

C BRACE PERPENDICULAR TO STEEL BEAM

D BRACE PARALLEL TO STEEL BEAM

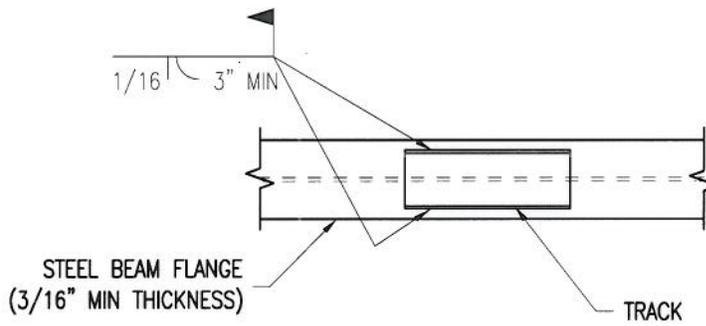

2 SECTION

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. THIS DETAIL IS APPLICABLE FOR PARTITION WALL CONDITIONS 'C' & 'D', ALL S_{DS} CATEGORIES. AS AN ALTERNATE TO ST6.08, THIS DETAIL CAN BE USED FOR ALL PARTITION WALL CONDITIONS.
3. STEEL BEAM FLANGE & WEB MINIMUM THICKNESS = 3/16".
4. RDP IN RESPONSIBLE CHARGE, IOR AND CONTRACTOR TO VERIFY THAT NO WELD IS INSTALLED IN THE PROTECTED ZONE OF ANY STEEL MEMBER, SEE ANSI/AISC 341-05, SECTION 7.4.



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

BRACE CONNECTION TO STEEL BEAM, -
PARTITION WALL CONDITIONS 'C' & 'D'


ISSUE DATE: 08/15/11

REVISION: DATE:


OPD NO.:

ST6.09

PLOT DATE: Aug 15, 2011

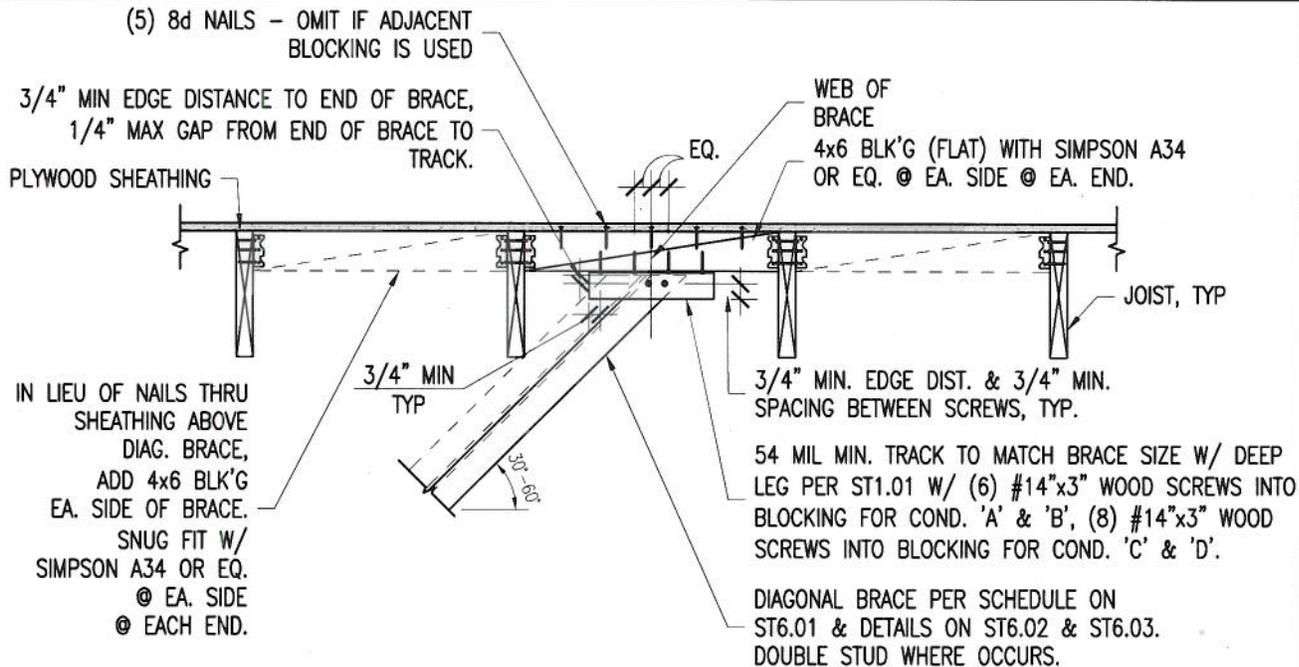

A BRACE PERPENDICULAR TO JOIST ABOVE

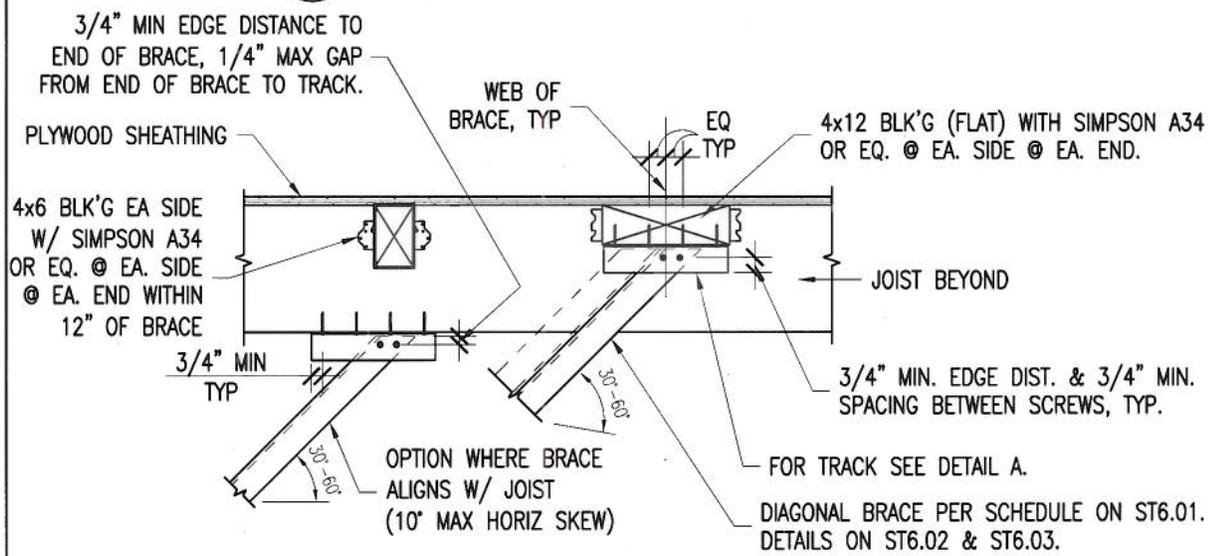

B BRACE PARALLEL TO JOIST ABOVE

- NOTES:**
1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
 2. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{ps} CATEGORIES.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP		
CODE: 2007 CBC		
SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: BRACE CONNECTION TO WOOD FRAMING - ALL PARTITION WALL CONDITIONS	REVISION: DATE:	ST6.10

PLOT DATE: Aug 15, 2011

TOP AND BOTTOM CONNECTION DEMAND SCHEDULES

TOP AND BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'A')

S _{ps}	SEISMIC REACTION AT THE TOP & BOTTOM CONNECTION FOR DIFFERENT WALL HEIGHT (LBS/FT)		
	9 FT	12 FT	16 FT
0.25-0.99	17	23	31
1.00-1.25	22	29	38
1.26-1.45	26	34	45
1.46-1.95	34	45	60

TOP AND BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'B')

S _{ps}	SEISMIC REACTION AT THE TOP & BOTTOM CONNECTION FOR DIFFERENT WALL HEIGHT (LBS/FT)					
	9 FT		12 FT		16 FT	
	BOTTOM	TOP	BOTTOM	TOP	BOTTOM	TOP
0.25-0.99	25	29	33	32	43	38
1.00-1.25	32	36	42	40	54	47
1.26-1.45	37	42	50	47	64	54
1.46-1.95	50	56	67	61	86	72

TOP AND BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'C')

S _{ps}	SEISMIC REACTION AT THE TOP & BOTTOM CONNECTION FOR DIFFERENT WALL HEIGHT (LBS/FT)					
	9 FT		12 FT		16 FT	
	BOTTOM	TOP	BOTTOM	TOP	BOTTOM	TOP
0.25-0.99	102	78	123	68	142	65
1.00-1.25	130	96	155	85	179	80
1.26-1.45	153	111	183	98	211	93
1.46-1.95	206	146	245	129	282	124

TOP AND BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'D')

S _{ps}	SEISMIC REACTION AT THE TOP & BOTTOM CONNECTION FOR DIFFERENT WALL HEIGHT (LBS/FT)					
	9 FT		12 FT		16 FT	
	BOTTOM	TOP	BOTTOM	TOP	BOTTOM	TOP
0.25-0.99	101	77	122	68	141	65
1.00-1.25	128	98	155	86	179	81
1.26-1.45	149	114	180	101	208	95
1.46-1.95	200	152	241	134	278	127

NOTES:

1. CONNECTION DEMANDS ARE PROVIDED TO ALLOW RDP IN RESPONSIBLE CHARGE TO VERIFY NON PRE-APPROVED COMPONENTS OF THE FRAMING SYSTEM AND THE SUPPORTING STRUCTURE.
2. SEE ST2.02 FOR TYPICAL PARTITION WALL SECTIONS.
3. LOADS GIVEN IN PLF MULTIPLY BY APPROPRIATE BRACE SPACING FOR REACTIONS.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

TOP & BOTTOM CONNECTION DEMAND SCHEDULES

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

ST6.11

PLOT DATE: Aug 15, 2011

STRUCTURE ABOVE TOP TRACK	FULL HEIGHT PARTITION WALL-TOP TRACK TO STRUCTURE CONNECTION
LIGHT WEIGHT (MIN. 3000 PSI) CONCRETE FILLED METAL DECK	ST7.02 & ST7.03
NORMAL WEIGHT (MIN. 3000 PSI) CONCRETE SLAB OR BEAM SOFFIT	ST7.02 & ST7.03
CONCRETE PAN JOIST OR WAFFLE SLAB SYSTEM	ST7.03, ST7.05 & ST7.06
METAL ROOF DECK WITHOUT STRUCTURAL CONCRETE FILL	ST7.07
STEEL BEAM	ST7.08
WOOD FRAMING	ST7.09

NOTES:

1. SEE ST7.01 THROUGH ST7.10 FOR TYPICAL DETAILS OF FULL HEIGHT PARTITION WALLS WITH A TOP TRACK CONNECTION DIRECTLY TO THE STRUCTURE ABOVE.
2. SEE ST6.00 FOR PARTIAL HEIGHT PARTITION WALLS.
3. FOR TOP & BOTTOM CONNECTION DEMAND SCHEDULE SEE ST6.11.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:

TOP CONNECTION CONDITIONS - FULL HEIGHT PARTITION WALL


ST7.00

PLOT DATE: Aug 15, 2011

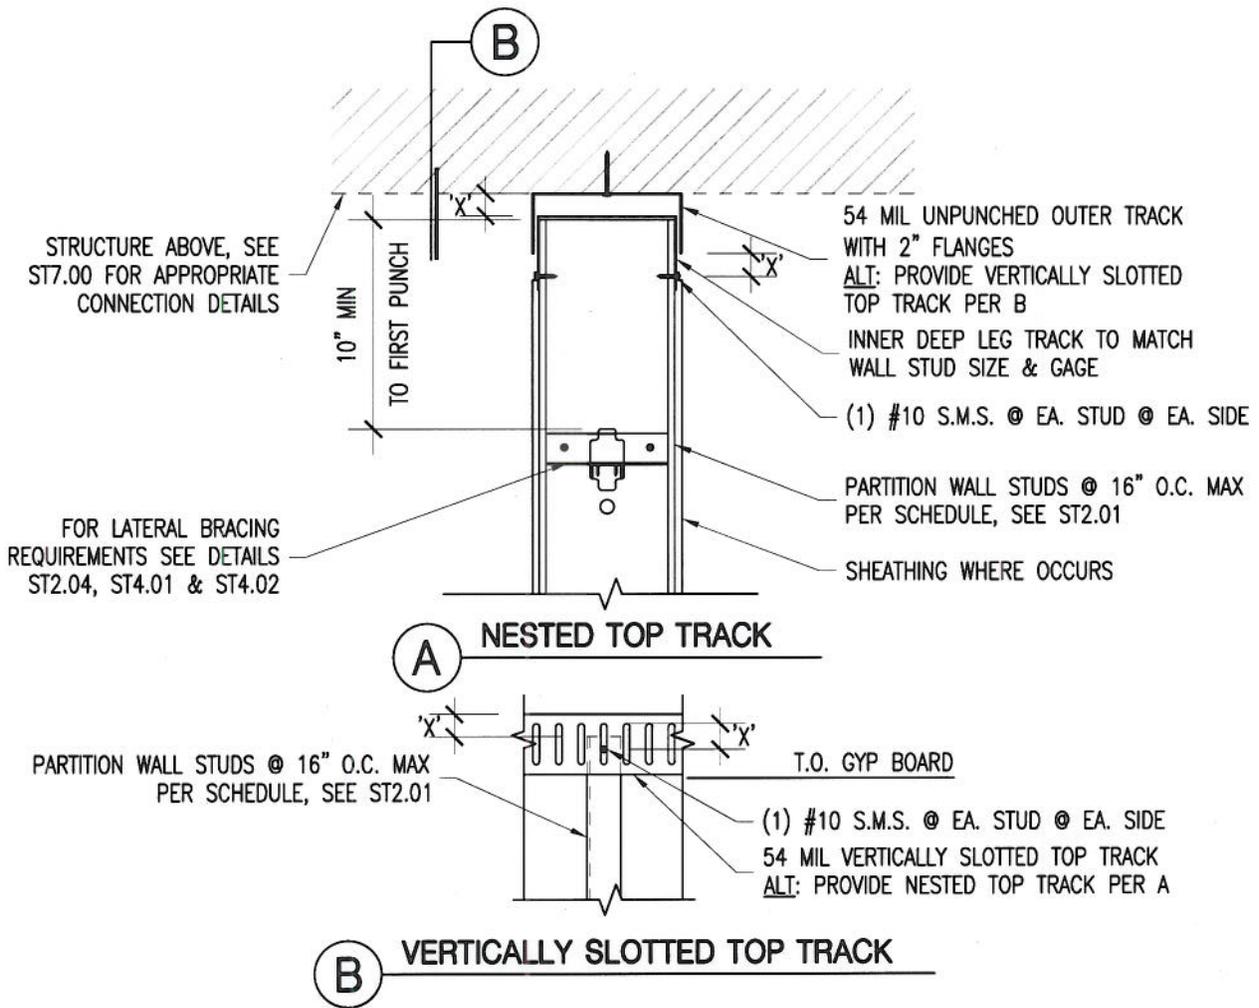

NOTES:

1. DO NOT CONNECT OUTER TRACK TO INNER TRACK OR STUDS (DETAIL A ONLY).
2. DO NOT CONNECT WALL FINISH TO OUTER TRACK (DETAILS A & B).
3. GAP 'X' - BY RDP IN RESPONSIBLE CHARGE, 1/2" MIN. TO 3/4" MAX.
4. RDP IN RESPONSIBLE CHARGE TO VERIFY "UL" RATING FOR HEAD OF WALL ASSEMBLY. APPROVED FIRE RESISTANT ASSEMBLY REQUIRED.
5. ONLY VERTICAL SLIP REQUIRED. HORIZONTAL, IN-PLANE SLIP NOT REQUIRED EXCEPT AT DETAIL ST7.08.
6. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
7. LATERAL BRACING ONLY REQUIRED IF GYP BOARD IS NOT FULL HEIGHT ON BOTH SIDES OF PARTITION WALL SEE ST2.06, ST4.00 & ST4.01.
8. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S₀₅ CATEGORIES.


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE:

08/15/11

OPD NO.:

REVISION:

DATE:

SHEET TITLE:

TYPICAL TOP TRACK ANCHORAGE - ALL PARTITION WALL CONDITIONS


ST7.01

PLOT DATE: Aug 15, 2011


(1) PAF CENTERED IN DECK FLUTE W/ 1 1/2" EMBED INTO DECK. SEE SPACING SCHEDULE ON ST7.04.

LWC (MIN 3000 PSI) FILLED METAL DECK OR NWC (MIN 3000 PSI) W/ t MIN=4"

WHERE t < 4 1/2" USE EXPANSION ANCHOR W/ 1 1/2" EMBED

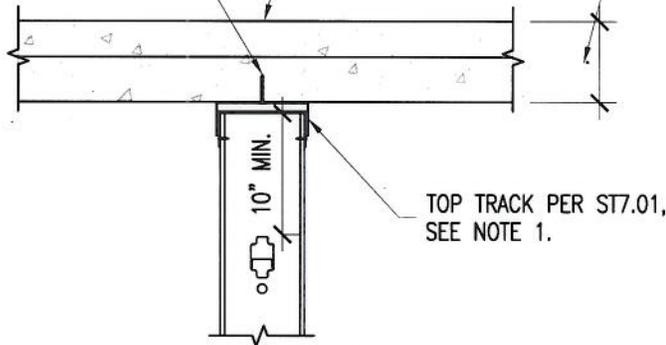

A ANCHORAGE TO CONC. SLAB & CONC. FILLED METAL DECK
(FLUTES PERPENDICULAR TO WALL)

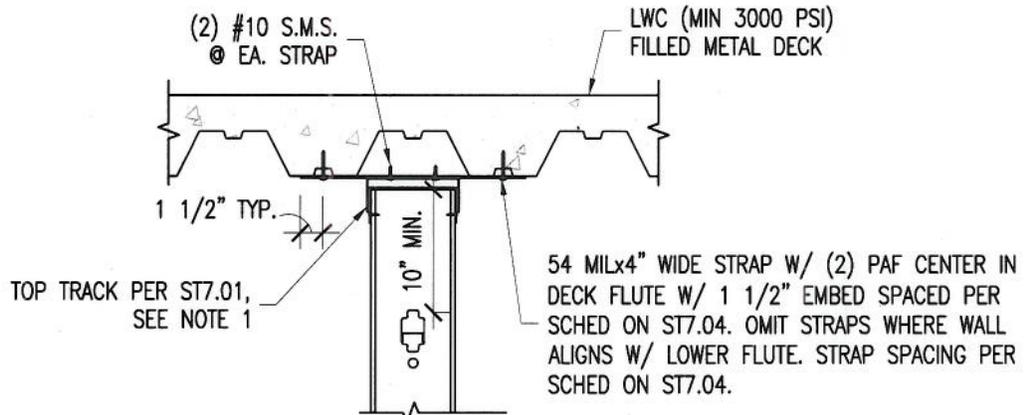

B ANCHORAGE TO CONC. FILLED METAL DECK
(FLUTES PARALLEL TO WALL)

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
3. SEE ST7.10 FOR CONNECTION AT JAMB LOCATION.
4. SEE ST2.01 FOR PARTITION WALL STUD SCHEDULE.
5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.: ST7.02
SHEET TITLE: TOP TRACK CONNECTION TO LWC FILLED METAL DECK & NWC SLAB - ALL PARTITION WALL CONDITIONS	REVISION: DATE:	

PLOT DATE: Aug 15, 2011

LWC (MIN 3000 PSI) FILLED METAL DECK
OR NWC (MIN 3000 PSI) W/ t MIN=4"

WHERE $t < 4 \frac{1}{2}$ "
USE EXPANSION ANCHOR
W/ $1 \frac{1}{2}$ " EMBED

TOP TRACK
PER ST7.01 W/ (2) #10
S.M.S. INTO Z-CLIP,
SEE NOTE 1.

FIRE PROOFING
WHERE OCCURS

$1 \frac{1}{2}$ "
x 54 MIL W/ (2) PAF SPACED
4" APART W/ $1 \frac{1}{4}$ " EMBED TO BOTTOM
FLUTE OF DECK CENTERED IN FLUTE. Z-CLIP
SHALL BE SPACED PER SCHEDULE ON ST7.04.

**C ANCHORAGE TO CONC. SLAB & FILLED
METAL DECK W/ FIREPROOFING**

(FLUTES PERPENDICULAR TO PARTITION WALL)

LWC (MIN 3000 PSI)
FILLED METAL DECK

FIRE PROOFING
WHERE OCCURS

$1 \frac{1}{2}$ "
x 54 MIL W/ (2) PAF W/
 $1 \frac{1}{4}$ " EMBED TO BOTTOM
FLUTE OF DECK
CENTERED IN FLUTE.
Z-CLIP SHALL BE SPACED PER
SCHEDULE ON ST7.04.

TOP TRACK PER ST7.01
W/ (2) #10 S.M.S.
INTO Z-CLIP, SEE
NOTE 1.

**D ANCHORAGE TO CONC. FILLED
METAL DECK W/ FIREPROOFING**

(FLUTES PARALLEL TO PARTITION WALL)

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
3. SEE ST7.10 FOR CONNECTION AT JAMB LOCATION.
4. SEE ST2.01 FOR PARTITION WALL PARTITION STUD SCHEDULE.
5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

TOP TRACK CONNECTION TO LWC FILLED
METAL DECK & NWC SLAB W/
FIREPROOFING-ALL PARTITION WALL CONDITIONS

ST7.03

PLOT DATE: Aug 15, 2011

**TOP TRACK CONNECTION TO LWC FILLED METAL DECK & NWC SLAB (MIN 3000 PSI)
FASTENER SPACING SCHEDULES**

PARTITION WALL CONDITION 'A'

Sps/ WALL HEIGHT	PAF SPACING (INCHES O.C.) PER ST7.02 DETAIL A		
	9 FT	12 FT	16 FT
0.25-0.99	48	36	30
1.00-1.25	42	30	18
1.26-1.45	36	24	18
1.46-1.95	24	18	12

FOR DETAIL B THROUGH D (STRAP OR Z-CLIP) DOUBLE THE SPACING INDICATED UP TO 48" OC.

PARTITION WALL CONDITION 'B'

Sps/ WALL HEIGHT	PAF SPACING (INCHES O.C.) PER ST7.02 DETAIL A		
	9 FT	12 FT	16 FT
0.25-0.99	30	24	24
1.00-1.25	24	18	18
1.26-1.45	18	18	12
1.46-1.95	12	12	12

FOR DETAIL B THROUGH D (STRAP OR Z-CLIP) DOUBLE THE SPACING INDICATED UP TO 48" OC.

PARTITION WALL CONDITION 'C'

Sps/ WALL HEIGHT	PAF SPACING (INCHES O.C.) PER ST7.02 DETAIL A		
	9 FT	12 FT	16 FT
0.25-0.99	6	12	12
1.00-1.25	6	6	6
1.26-1.45	6	6	6
1.46-1.95	6	6	6

FOR DETAIL B THROUGH D (STRAP OR Z-CLIP) DOUBLE THE SPACING INDICATED UP TO 48" OC.

PARTITION WALL CONDITION 'D'

Sps/ WALL HEIGHT	PAF SPACING (INCHES O.C.) PER ST7.02 DETAIL A		
	9 FT	12 FT	16 FT
0.25-0.99	6	12	12
1.00-1.25	6	6	6
1.26-1.45	6	6	6
1.46-1.95	6	6	6

FOR DETAIL B THROUGH D (STRAP OR Z-CLIP) DOUBLE THE SPACING INDICATED UP TO 48" OC.

NOTES:

1. SEE ST7.02 & ST7.03 FOR DETAILS A, B, C, & D.
2. VALUES IN TABLES ABOVE REPRESENT MAXIMUM SPACING. DECREASE SPACING AS REQ'D TO COORDINATE W/ METAL DECK FLUTE SPACING. WHERE PAF SPACING IS LESS THAN 12" OC, OK TO PROVIDE MULTIPLE PAF AT LOW FLUTE AS REQUIRED. MAINTAIN EDGE DISTANCE AND SPACING REQUIREMENTS PER ST1.01 & ST1.02.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:


**TOP TRACK CONNECTION TO LWC FILLED
METAL DECK & NWC SLAB
FASTENER SPACING SCHEDULES**

ST7.04

PLOT DATE: Aug 15, 2011

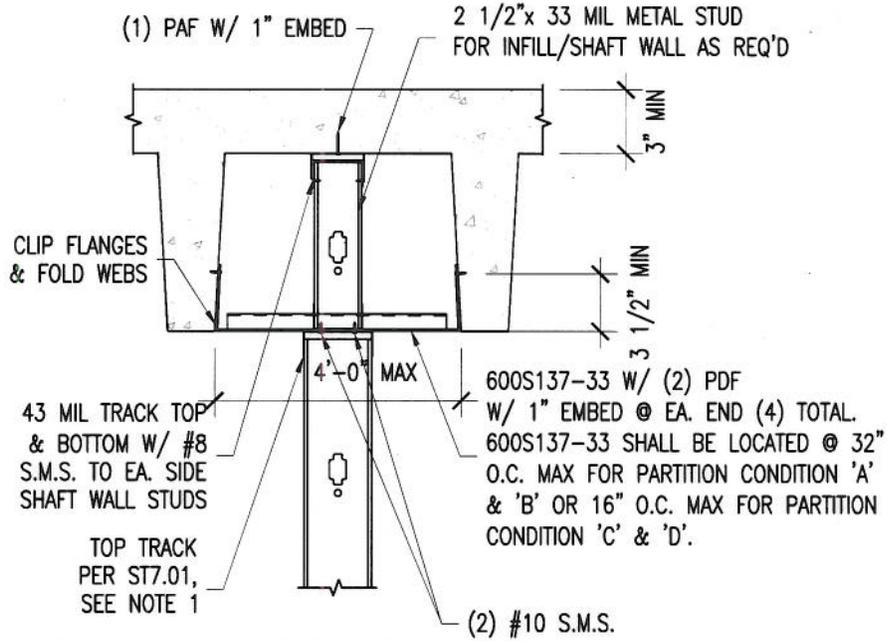

A ANCHORAGE TO CONG. WAFFLE SLAB

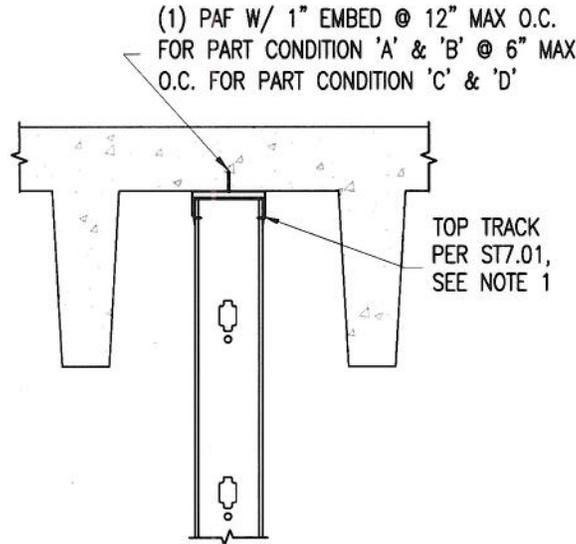

B ANCHORAGE FOR PARTITION WALL PARALLEL TO CONG. PAN JOIST



 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

- NOTES:**
1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
 2. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
 3. SEE ST2.00 FOR TYPICAL PARTITION WALL CONDITIONS.
 4. SEE ST2.01 FOR PARTITION WALL STUD SCHEDULE.
 5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.

AGENCY STAMP		
CODE: 2007 CBC		
SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: TOP TRACK CONNECTION TO CONCRETE PAN JOIST AND WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS	REVISION:	DATE:
		ST7.05

PLOT DATE: Aug 15, 2011

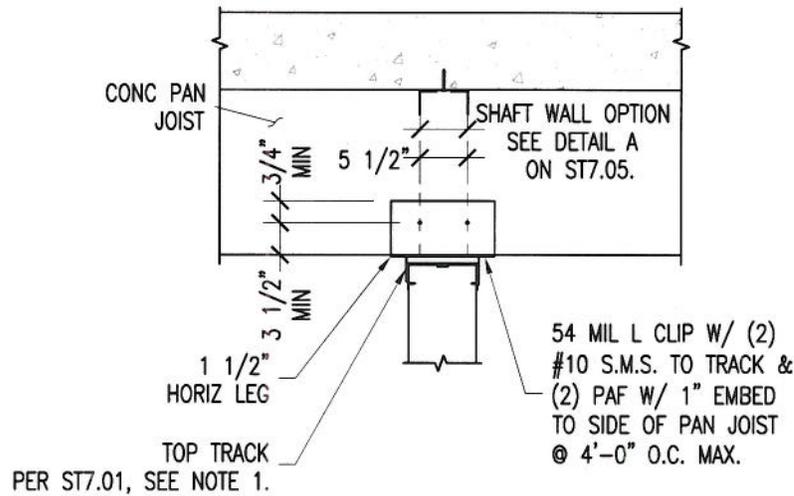

D

ANCHORAGE FOR PARTITION WALL PERPENDICULAR TO CONC. PAN JOIST

SDS/ WALL HT.	ANCHORAGE FOR PARTITION PERP. TO CONC. PAN JOIST						
	PARTITION TYPE						CONDITIONS 'C' & 'D'
	CONDITION 'A'		CONDITION 'B'		CONDITIONS 'C' & 'D'		
	9 FT	12 FT	16 FT	9 FT	12 FT	16 FT	ALL
0.25-0.99	✓	✓	✓	✓	✓	✓	-
1.00-1.25	✓	✓	✓	✓	-	-	-
1.26-1.45	✓	✓	-	-	-	-	-
1.46-1.95	✓	-	-	-	-	-	-

- DETAIL D CAN BE USED FOR THIS CONDITION
- DETAIL D CAN NOT BE USED FOR THIS CONDITION

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
3. SEE ST2.00 FOR TYPICAL PARTITION WALL CONDITIONS.
4. SEE ST2.01 FOR PARTITION WALL PARTITION STUD SCHEDULE.
5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.




REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

[Signature]


Office of Statewide Health Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP		CODE: 2007 CBC	
SECTION TITLE: STANDARD PARTITION WALL DETAILS		ISSUE DATE: 08/15/11	OPD NO.:
SHEET TITLE: TOP TRACK CONNECTION TO CONCRETE PAN JOIST AND WAFFLE SLAB SYSTEM - ALL PARTITION WALL CONDITIONS		REVISION: _____ DATE: _____	ST7.06

PLOT DATE: Aug 15, 2011

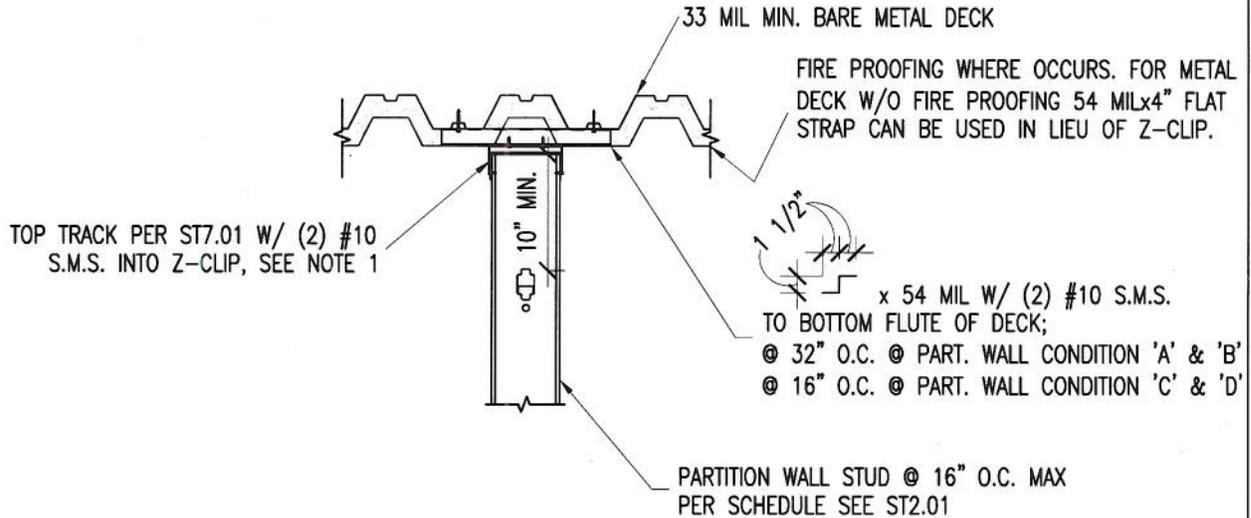

A ANCHORAGE TO METAL ROOF DECK
(FLUTES PARALLEL TO PARTITION WALL)

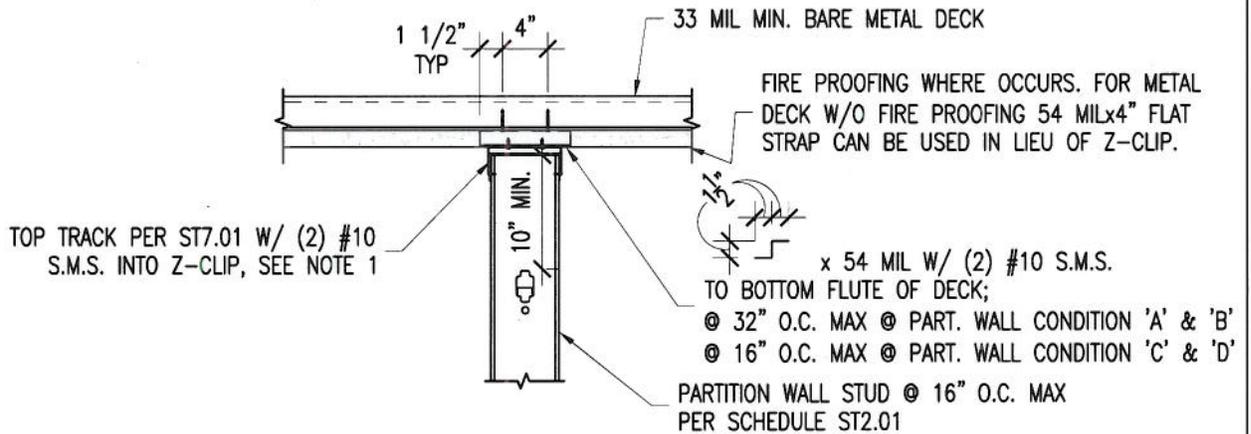

B ANCHORAGE TO METAL ROOF DECK
(FLUTES PERPENDICULAR TO PARTITION WALL)

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. RDP IN RESPONSIBLE CHARGE TO EVALUATE STEEL DECK FOR CAPACITY.
3. SEE ST2.00 FOR TYPICAL PARTITION WALL CONDITIONS.
4. CONNECTION SPACING SHOWN ABOVE REPRESENTS MAXIMUM SPACING. DECREASE SPACING AS REQ'D TO COORDINATE W/ METAL DECK FLUTE SPACING.
5. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

TOP TRACK CONNECTION TO METAL ROOF DECK WITHOUT CONCRETE FILL - ALL PARTITION WALL CONDITIONS

ISSUE DATE: 08/15/11



REVISION: DATE:

OPD NO.:

ST7.07

PLOT DATE: Aug 15, 2011

TOP TRACK PER ST7.01 W/
(2) #10 S.M.S. INTO Z-CLIP,
SEE NOTE 1 & 5 IF USING
VERTICALLY SLOTTED TOP
TRACK PER DETAIL B ON
ST7.01, DO NOT INSTALL
SCREWS THROUGH SLOTTED
TRACK AND PROVIDE LATERAL
BRACING PER ST4.01 OR
ST4.02 WITHIN 18" OF THE
TOP OF THE WALL.

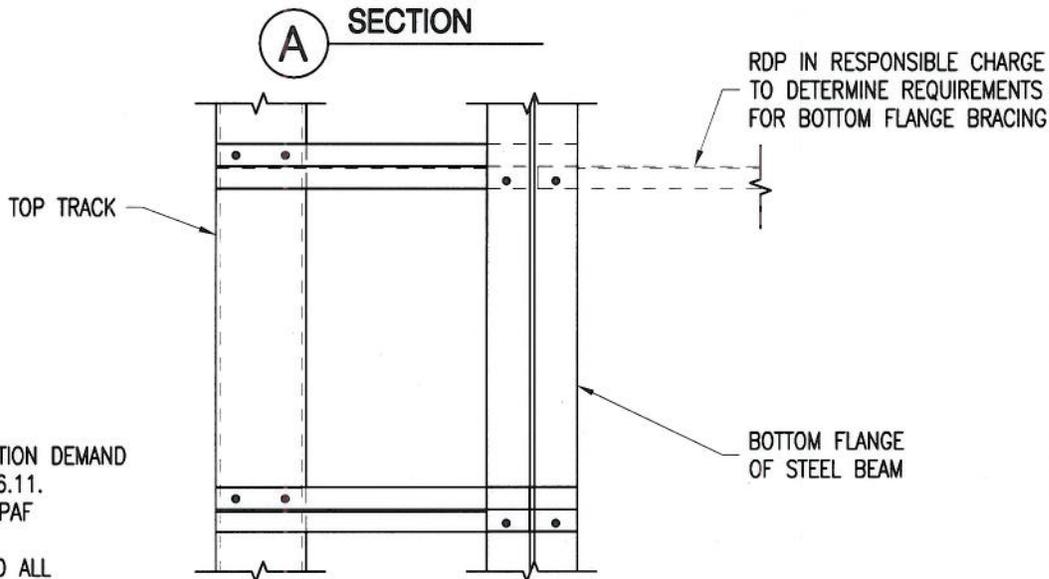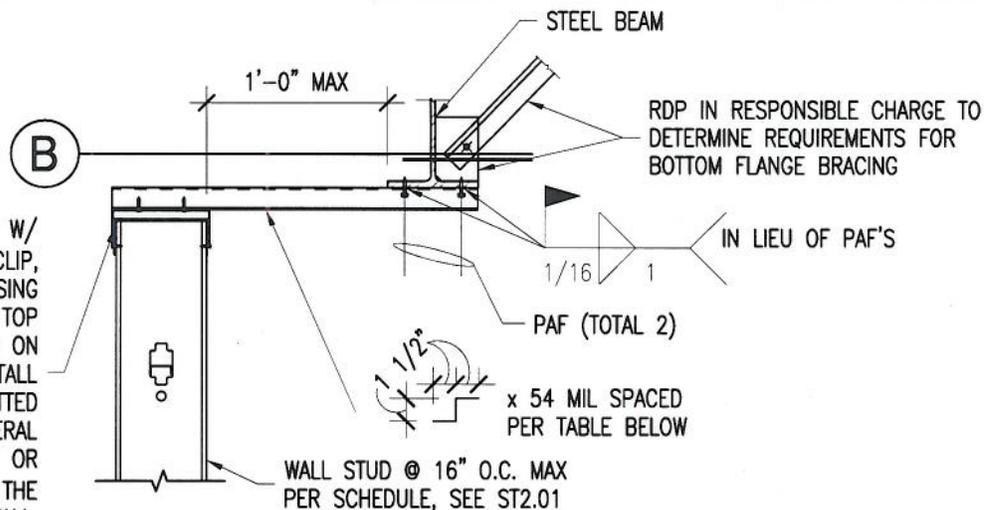

NOTES:

1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
2. SEE ST1.05 FOR PAF REQUIREMENTS.
3. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{ps} CATEGORIES.
4. RDP IN RESPONSIBLE CHARGE, IOR AND CONTRACTOR TO VERIFY THAT NO PDF IS INSTALLED IN THE PROTECTED ZONE OF ANY STEEL MEMBER, SEE ANSI/AISC 341-05, SECTION 7.4.
5. IN-PLANE SLIP REQUIRED.


 REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED

[Signature]
 Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

SHEET TITLE:

TOP TRACK CONNECTION TO STEEL BEAM
- ALL PARTITION WALL CONDITIONS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

ST7.08


PARTITION WALL CONDITION 'A' & 'B'

S_{ps} / WALL HEIGHT	Z-CLIP SPACING (INCHES O.C.)		
	9 FT	12 FT	16 FT
0.25-1.95	48	48	48


PARTITION WALL CONDITION 'C' & 'D'

S_{ps} / WALL HEIGHT	Z-CLIP SPACING (INCHES O.C.)		
	9 FT	12 FT	16 FT
0.25-1.25	48	48	48
1.26-1.95	32	32	32

PLOT DATE: Aug 15, 2011

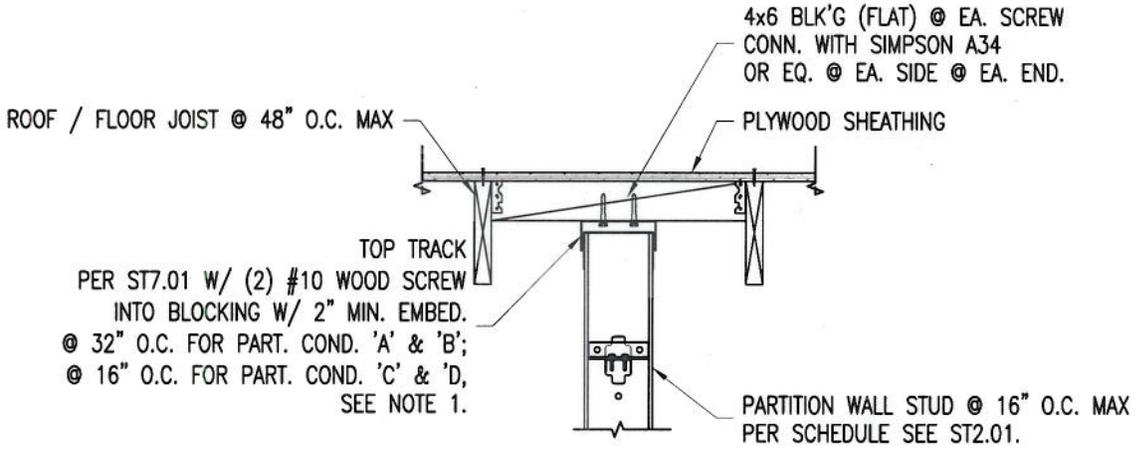

A PARTITION WALL PARALLEL TO JOIST ABOVE

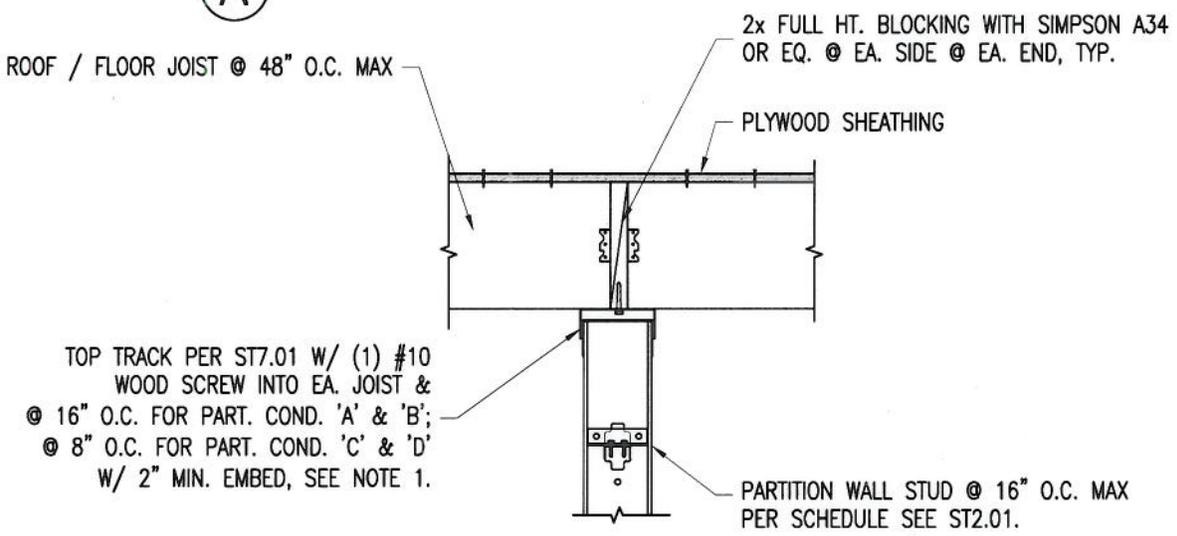

B PARTITION WALL PERPENDICULAR TO JOIST ABOVE

NOTES:

- 1. SEE TOP CONNECTION DEMAND SCHEDULE ON ST6.11.
- 2. DETAIL APPLIES TO ALL PARTITION WALL CONDITIONS & ALL S_{DS} CATEGORIES.



AGENCY STAMP

CODE:
2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS


ISSUE DATE: **08/15/11**
REVISION: DATE:

OPD NO.:
ST7.09

SHEET TITLE:
TOP TRACK CONNECTION INTO WOOD FRAMING - ALL PARTITION WALL CONDITIONS


PLOT DATE: Aug 15, 2011

NOTE:
 PROVIDE Z-CLIP PER
 ST7.03 AS REQ'D
 @ FIREPROOFING

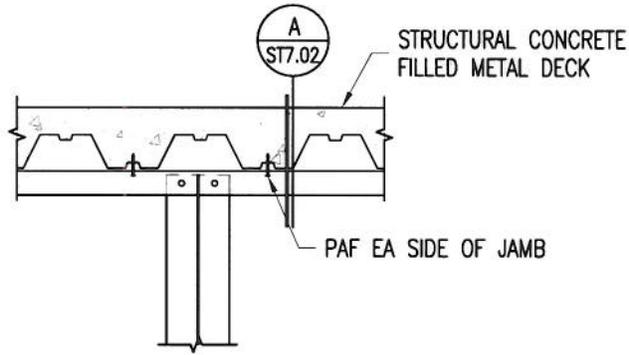

A ANCHORAGE TO CONG. FILLED METAL DECK
 AT JAMB LOCATION
 (FLUTES PERPENDICULAR TO WALL)

NOTE:
 PROVIDE Z-CLIP PER
 ST7.03 AS REQ'D
 @ FIREPROOFING

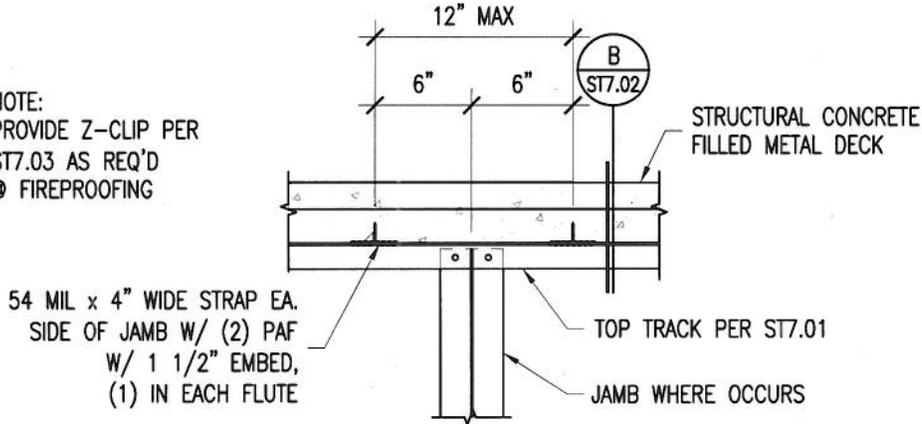

B ANCHORAGE TO CONG. FILLED METAL DECK
 AT JAMB LOCATION
 (FLUTES PARALLEL TO WALL)

54 MIL x 4" WIDE STRAP EA.
 SIDE OF JAMB W/ (2) PAF
 W/ 1 1/2" EMBED,
 (1) IN EACH FLUTE

STRUCTURAL CONDITION ABOVE TOP TRACK	PROVIDE ADD'L TOP TRACK CONN AT JAMB USING DETAIL LISTED BELOW
CONCRETE PAN JOIST OR WAFFLE SLAB SYSTEM	ST7.05 OR ST7.06
METAL ROOF DECK WITHOUT STRUCTURAL CONCRETE FILL	ST7.07
STEEL BEAM	ST7.08
WOOD FRAMING	ST7.09


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

NOTE:
 1. SEE ST1.01, ST1.02 & ST1.05 FOR PAF REQUIREMENTS.

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

TOP TRACK CONNECTION AT JAMB
 LOCATIONS - PARTITION WALL CONDITION
 'A'

ST7.10

PLOT DATE: Aug 15, 2011

BOTTOM CONNECTION SCHEDULE

STRUCTURAL CONDITION BELOW BOTTOM TRACK	BOTTOM TRACK CONNECTION
	PARTITION WALL CONDITIONS 'A', 'B', 'C', & 'D'
LWC FILLED METAL DECK OR NWC SLAB	ST8.01
WOOD FRAMING	ST8.04

NOTES:

1. FOR PARTITION WALL CONDITION DESCRIPTION SEE ST2.00
2. FOR BOTTOM CONNECTION DEMAND SCHEDULE SEE ST6.11.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:

BOTTOM CONNECTION SCHEDULE

ST8.00

PLOT DATE: Aug 15, 2011

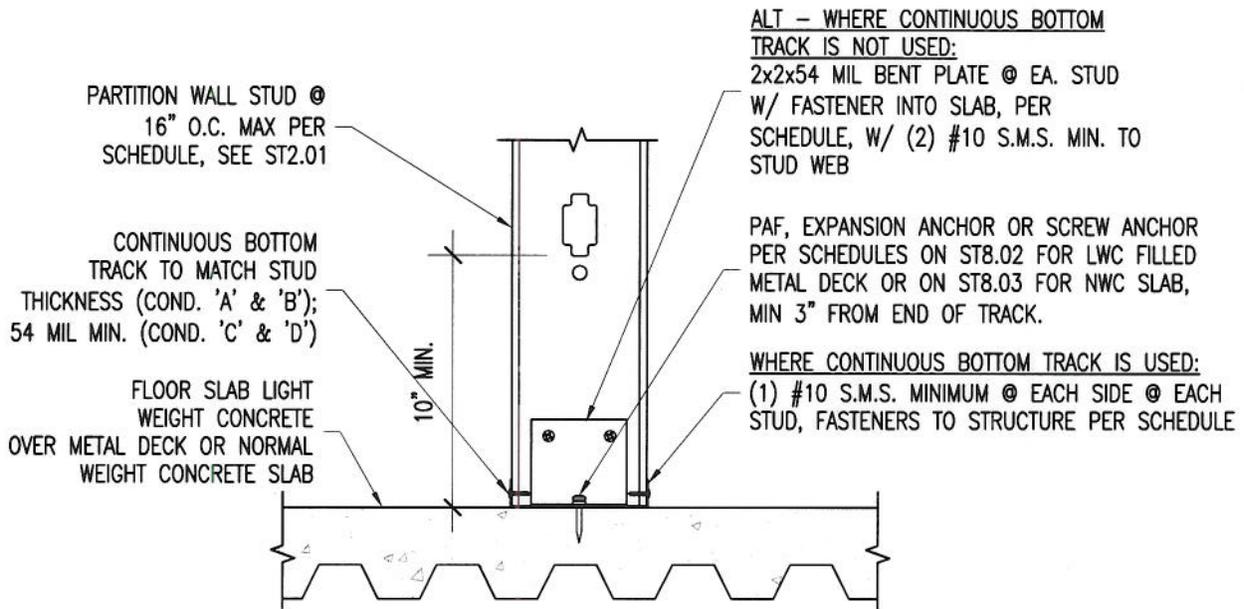

(A) PARTITION WALL BOTTOM TRACK ANCHORAGE
 LIGHT WEIGHT CONCRETE OVER METAL DECK OR NORMAL WEIGHT CONCRETE SLAB

NOTES:

1. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENT AND ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS AND ST1.09 & ST1.10 FOR SCREW ANCHOR REQUIREMENTS.
2. SEE ST8.05 FOR ANCHORAGE @ JAMBS.
3. FOR LIGHT WEIGHT CONCRETE OVER METAL DECK, SEE ST8.02 FOR FASTENER TO SLAB SCHEDULE.
4. FOR NORMAL WEIGHT CONCRETE SLAB, SEE ST8.03 FOR FASTENER TO SLAB SCHEDULE.
5. SEE ST2.01 FOR PARTITION WALL STUD SCHEDULE.


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:

REVISION: DATE:

SHEET TITLE:

BOTTOM TRACK CONNECTION TO
 LWC ON METAL DECK OR NWC SLAB
 - ALL PARTITION WALL CONDITIONS

ST8.01

PLOT DATE: Aug 15, 2011

BOTTOM TRACK CONNECTION TO LWC ON METAL DECK FASTENER MAX SPACING SCHEDULE

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'A')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	32	32	32	32	32
	1.26-1.45	32	32	32	32	32
	1.46-1.95	24	32	32	32	32
12 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	24	32	32	32	32
	1.26-1.45	24	32	32	32	32
	1.46-1.95	16	32	32	32	32
16 FT	0.25-0.99	24	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	16	32	32	32	32
	1.46-1.95	8	32	32	32	32

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'B')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	24	32	32	32	32
	1.26-1.45	24	32	32	32	32
	1.46-1.95	16	32	32	32	32
12 FT	0.25-0.99	24	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	16	32	32	32	32
	1.46-1.95	8	32	32	32	32
16 FT	0.25-0.99	16	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	8	32	32	32	32
	1.46-1.95	8	32	32	32	32

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITIONS 'C' & 'D')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	8	32	32	24	32
	1.00-1.25	-	32	32	24	24
	1.26-1.45	-	32	32	16	16
	1.46-1.95	-	24	24	8	16
12 FT	0.25-0.99	-	32	32	32	32
	1.00-1.25	-	32	32	32	32
	1.26-1.45	-	32	32	32	32
	1.46-1.95	-	32	32	32	32
16 FT	0.25-0.99	-	32	32	16	24
	1.00-1.25	-	24	24	16	16
	1.26-1.45	-	24	24	8	16
	1.46-1.95	-	16	16	8	8



REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED



Office of Statewide Health Planning & Development FACILITIES DEVELOPMENT DIVISION

- NOTES:**
- 0.145" PAF WITH 1", 1 1/4" OR 1 1/2" EMBED. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
 - SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
 - SEE ST1.09 & ST1.10 FOR SCREW ANCHOR REQUIREMENTS.

AGENCY STAMP

CODE: 2007 CBC

SECTION TITLE: STANDARD PARTITION WALL DETAILS	ISSUE DATE: 08/15/11	OPD NO.: ST8.02
SHEET TITLE: BOTTOM TRACK CONNECTION TO LWC ON METAL DECK FASTENER MAX SPACING SCHEDULE	REVISION: DATE:	

PLOT DATE: Aug 15, 2011

BOTTOM TRACK CONNECTION TO NWC SLAB FASTENER MAX SPACING SCHEDULE

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'A')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	32	32	32	32	32
	1.26-1.45	32	32	32	32	32
	1.46-1.95	24	32	32	32	32
12 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	24	32	32	32	32
	1.26-1.45	24	32	32	32	32
	1.46-1.95	16	32	32	32	32
16 FT	0.25-0.99	24	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	16	32	32	32	32
	1.46-1.95	8	32	32	32	32

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITION 'B')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	32	32	32	32	32
	1.00-1.25	24	32	32	32	32
	1.26-1.45	24	32	32	32	32
	1.46-1.95	16	32	32	32	32
12 FT	0.25-0.99	24	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	16	32	32	32	32
	1.46-1.95	8	32	32	32	32
16 FT	0.25-0.99	16	32	32	32	32
	1.00-1.25	16	32	32	32	32
	1.26-1.45	8	32	32	32	32
	1.46-1.95	8	32	32	32	32

BOTTOM CONNECTION DEMANDS (PARTITION WALL CONDITIONS 'C' & 'D')

MAX PARTITION WALL HEIGHT	S _{ps}	MAXIMUM FASTENER SPACING IN INCHES AT BOTTOM CONNECTION				
		0.145" PAF SEE NOTE 1	3/8" EXP ANCHOR W/ 2" EMBED	1/2" EXP ANCHOR W/ 2" EMBED	3/8" SCREW ANCHOR W/ 2 1/2" EMBED	1/2" SCREW ANCHOR W/ 2 1/2" EMBED
9 FT	0.25-0.99	8	32	32	32	32
	1.00-1.25	-	32	32	32	32
	1.26-1.45	-	32	32	32	32
	1.46-1.95	-	24	32	24	24
12 FT	0.25-0.99	-	32	32	32	32
	1.00-1.25	-	32	32	32	32
	1.26-1.45	-	32	32	32	32
	1.46-1.95	-	32	32	32	32
16 FT	0.25-0.99	-	32	32	32	32
	1.00-1.25	-	24	32	24	32
	1.26-1.45	-	24	32	24	24
	1.46-1.95	-	16	24	16	16


 REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

 Office of Statewide Health Planning & Development
 FACILITIES DEVELOPMENT DIVISION

NOTES:

- 0.145" PAF WITH 1", 1 1/4" OR 1 1/2" EMBED. SEE ST1.01 & ST1.02 FOR PAF REQUIREMENTS.
- SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
- SEE ST1.09 & ST1.10 FOR SCREW ANCHOR REQUIREMENTS.

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

BOTTOM TRACK CONNECTION TO NWC SLAB FASTENER MAX SPACING SCHEDULE


ST8.03

PLOT DATE: Aug 15, 2011

(1) #10 WOOD SCREW x 2" MIN PENETRATION INTO BLOCKING @ 16" O.C. @ PART. COND. 'A' & 'B'; 4" O.C. @ PART. COND. 'C' & 'D', MIN (2) SCREWS PER EA. BLKG. SEE NOTE 5 BELOW.

(1) #10 S.M.S. @ EA. SIDE @ EA. STUD, TYP.
PLYWOOD SHEATHING

PARTITION WALL STUD @ 16" O.C. MAX PER SCHEDULE, SEE ST2.01
ALTERNATE: WHERE CONTINUOUS BOTTOM TRACK IS NOT USED, PROVIDE L2x2x54 MILx3" LONG BENT PL @ EA. STUD W/ (2) #10 S.M.S. TO STUD & (1) #10 WOOD SCREW TO BLKG @ PART. COND. 'A' & 'B' OR L2x4x54 MILx3" LONG BENT PL W/ (4) #10 WOOD SCREWS TO BLKG @ PART. COND. 'C', SEE NOTE 5 BELOW.

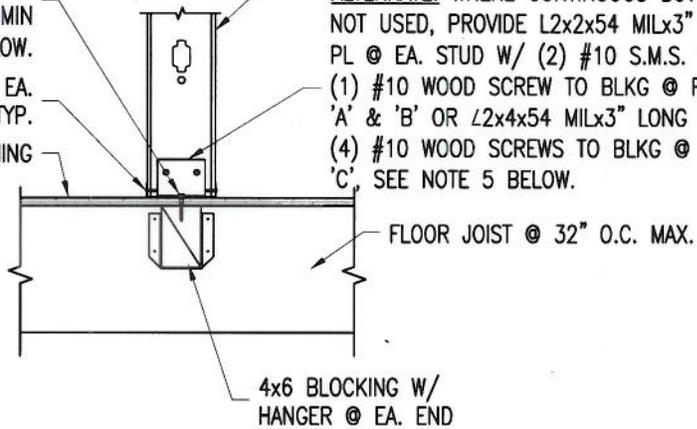


A PARTITION WALL PERPENDICULAR TO FLOOR JOIST

(1) #10 WOOD SCREW x 2" MIN. PENETRATION @ 16" O.C. @ PART. COND. 'A' & 'B'; 4" O.C. @ PART. COND. 'C' & 'D'. CENTER SCREW IN JOIST & STAGGER SCREWS. SEE NOTE 5 BELOW.

#10 WOOD SCREWS @ 12" O.C. WITH 1" MIN. PENETRATION INTO BLOCKING, (3) WOOD SCREWS MIN, TYP

PARTITION WALL STUD @ 16" O.C. MAX PER SCHEDULE, SEE ST2.01
ALTERNATE: WHERE CONTINUOUS BOTTOM TRACK IS NOT USED, PROVIDE L2x2x54 MILx3" LONG BENT PL @ EA. STUD W/ (2) #10 S.M.S. TO STUD & (1) #10 WOOD SCREW TO JOIST @ PART. COND. 'A' & 'B' OR L2x4x54 MILx3" LONG BENT PL W/ (4) #10 WOOD SCREWS TO JOIST @ PART. COND. 'C', SEE NOTE 5 BELOW.

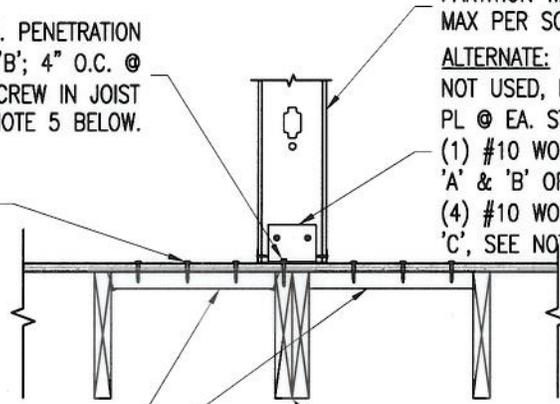

FLAT 2x4 BLOCKING @ 4'-0" O.C. W/ (2) 10d TOE NAILS EA END, ALTERNATE

MIN. DOUBLE FLOOR JOIST BELOW PARTITION

B PARTITION WALL PARALLEL TO FLOOR JOIST

NOTES:

1. SEE ST8.01 FOR BALANCE OF INFORMATION.
2. SEE ST8.05 FOR BOTTOM CONNECTION @ JAMBS.
3. RDP IN RESPONSIBLE CHARGE SHALL VERIFY ADEQUACY OF FRAMING.
4. SEE ST2.01 FOR PARTITION WALL STUD SCHEDULE.
5. VERIFY SCREWS ARE INSTALLED 1/2" MIN FROM THE END OF BLKG.



AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

OPD NO.:


REVISION: DATE:

SHEET TITLE:

BOTTOM TRACK CONNECTION TO WOOD FRAMING
- ALL PARTITION WALL CONDITIONS

ST8.04

PLOT DATE: Aug 15, 2011

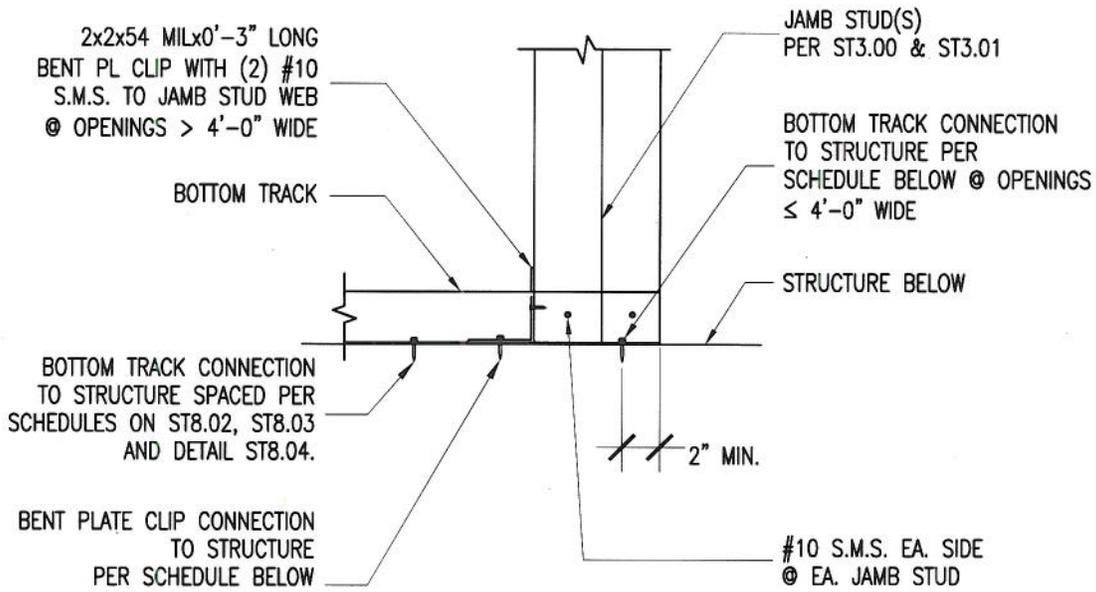

OPENING SIZE	JAMB STUD BOTTOM TRACK CONNECTION TYPE	CONNECTION TO STRUCTURE (THROUGH BENT PL CLIP OR THROUGH BOTTOM TRACK)
≤ 4'-0"	BOTTOM TRACK CONNECTION TO STRUCTURE (NO CLIP REQUIRED)	(2) 0.145"∅ PAF
		(1) 3/8"∅ x 2" EMBED EXPANSION ANCHOR
		(1) 3/8"∅ x 2 1/2" EMBED SCREW ANCHOR
		(2) #10 WOOD SCREWS
>4'-0" TO ≤ 10'-0"	BENT PL CLIP CONNECTION TO STRUCTURE	(2) 0.145"∅ PAF
		(1) 3/8"∅ x 2" EMBED EXPANSION ANCHOR
		(1) 3/8"∅ x 2 1/2" EMBED SCREW ANCHOR
		(3) #10 WOOD SCREWS



NOTE:
 1. BOTTOM CONNECTION @ JAMBS AT PARTITION WALL CONDITION 'A', ALL S_{DS} CATEGORIES.

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE: 08/15/11

REVISION: DATE:

OPD NO.:

SHEET TITLE:

BOTTOM TRACK CONNECTION @ JAMBS - PARTITION WALL CONDITION 'A'

ST8.05


PLOT DATE: Aug 15, 2011


SUSPENDED SOFFIT CONNECTION SCHEDULE

STRUCTURE ABOVE SUSPENDED SOFFIT	DETAIL
CONCRETE SLAB, BEAM OR LWC FILLED METAL DECK	ST9.02
CONNECTION TO STEEL BEAM	ST9.03
CONCRETE PAN JOIST OR WAFFLE SYSTEM SLAB SYSTEM	NOT AVAILABLE
METAL ROOF DECK WITHOUT CONCRETE FILL SYSTEM	NOT AVAILABLE
WOOD FRAMING	NOT AVAILABLE

NOTES:

1. SEE ST9.01 FOR SUSPENDED SOFFIT DETAIL.
2. SEE SOFFIT LOADING DIAGRAM BELOW. RDP IN RESPONSIBLE CHARGE TO DESIGN CONNECTION AND CHECK SUPPORTING FRAMING FOR ALL CONDITIONS NOT COVERED IN THESE DETAILS. LOADS SHOWN AT ALLOWABLE STRESS LEVEL.

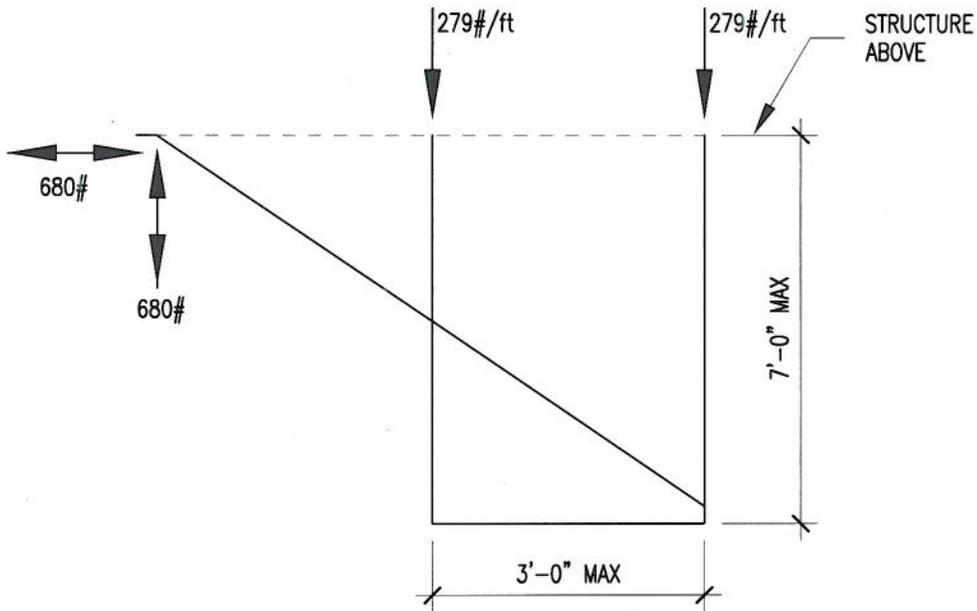


 REVIEWED IN ACCORDANCE WITH
 THE REQUIREMENTS OF T24, CCR
 APPROVED

 Office of Statewide Health
 Planning & Development
 FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:

STANDARD PARTITION WALL DETAILS

ISSUE DATE:

08/15/11

REVISION:

DATE:


OPD NO.:

SHEET TITLE:

SUSPENDED SOFFIT CONNECTION
 SCHEDULE

ST9.00

PLOT DATE: Aug 15, 2011

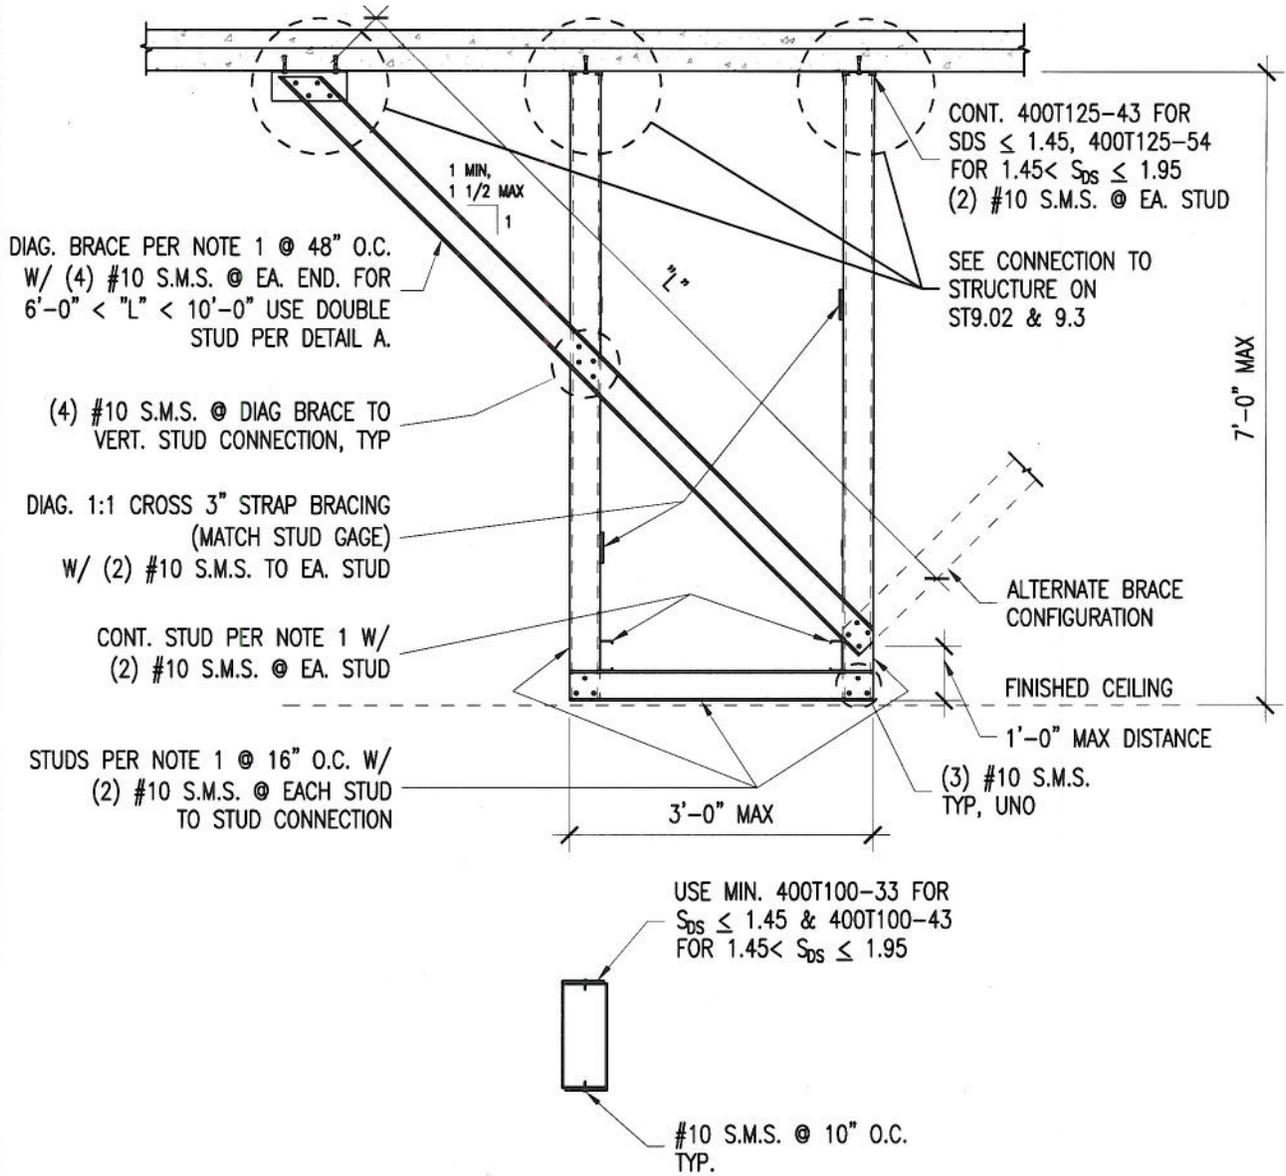



A DOUBLE STUD BRACE




- NOTES:**
1. USE MIN 4" x 33 MIL STUDS (400S137-33) FOR $S_{DS} \leq 1.45$ & 4" x 43 MIL (400S137-43) FOR $1.45 < S_{DS} \leq 1.95$
 2. SUSPENDED SOFFITS ARE NOT DESIGNED TO SUPPORT ADJACENT HANGING OR FRAMED CEILING, EQUIPMENT OR CABINETS.
 3. SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.

AGENCY STAMP		ISSUE DATE: 08/15/11		OPD NO.: ST9.01
CODE: 2007 CBC		REVISION:	DATE:	
SECTION TITLE: STANDARD PARTITION WALL DETAILS				
SHEET TITLE: SUSPENDED SOFFIT DETAIL				

PLOT DATE: Aug 15, 2011

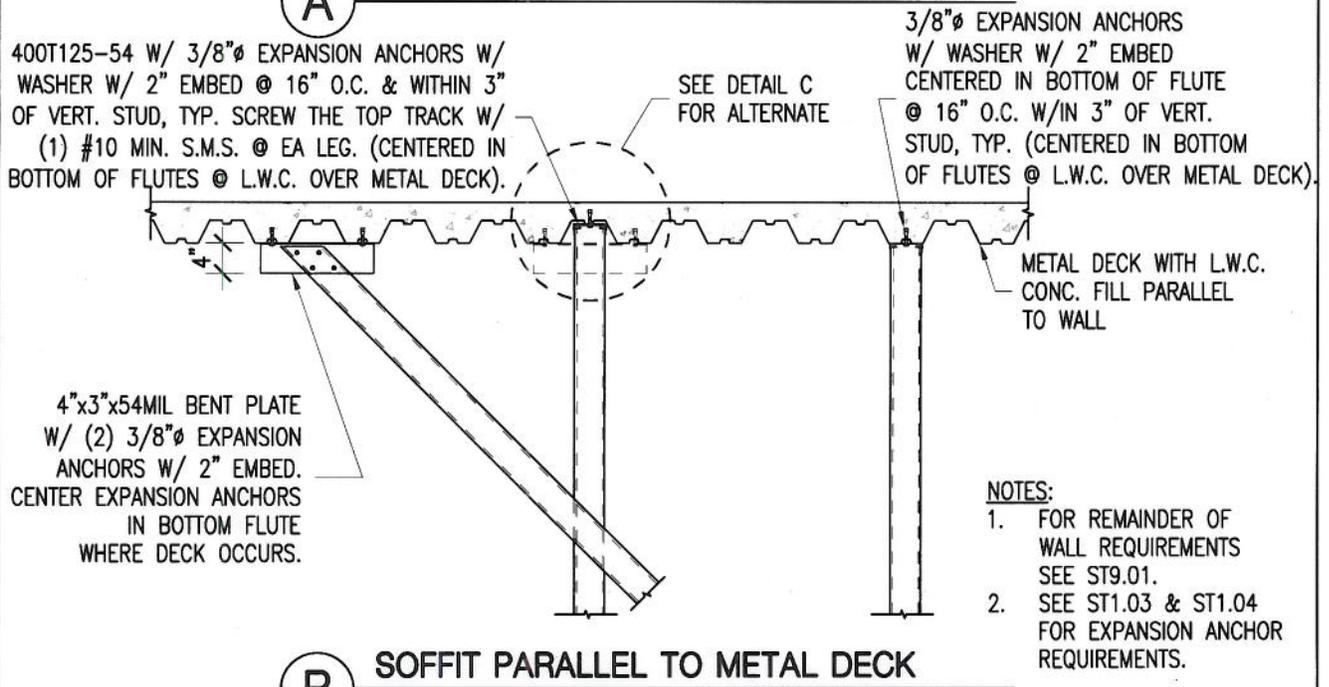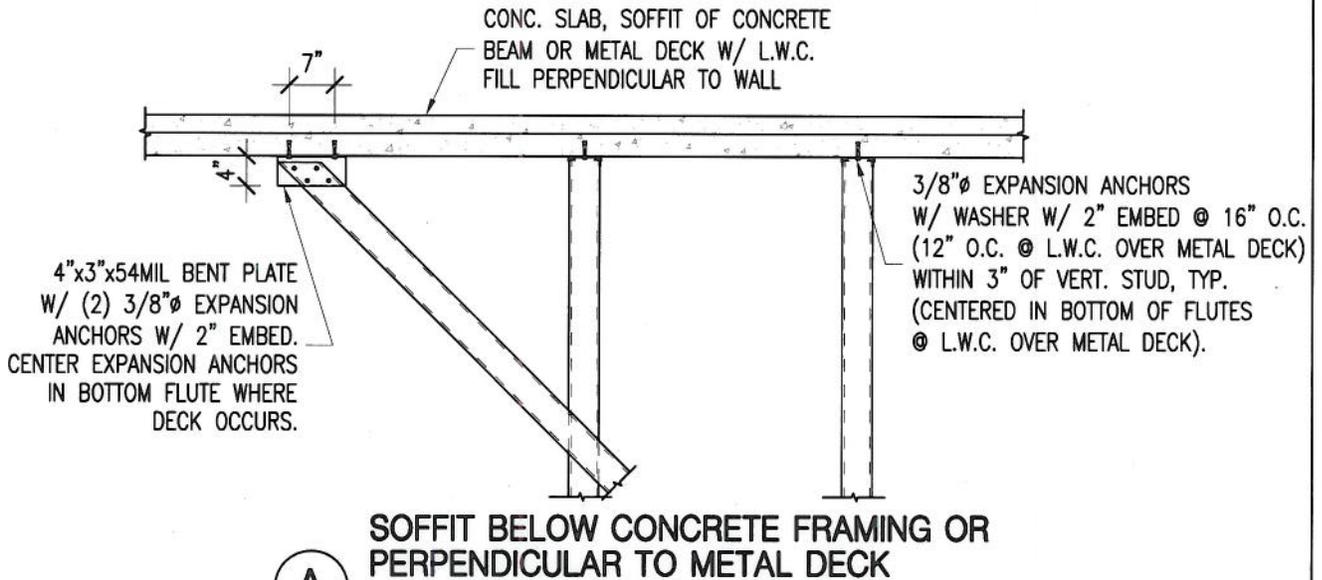

- NOTES:**
- FOR REMAINDER OF WALL REQUIREMENTS SEE ST9.01.
 - SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.

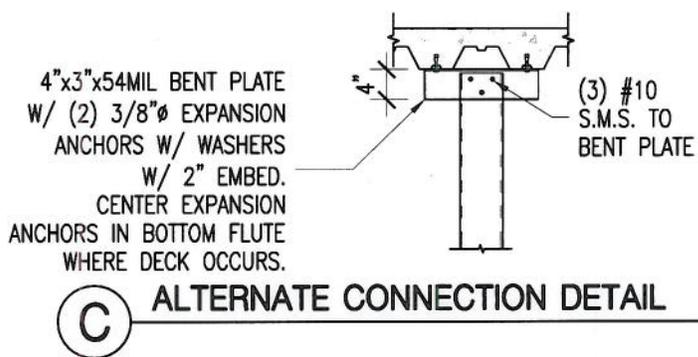



REVIEWED IN ACCORDANCE WITH THE REQUIREMENTS OF T24, CCR APPROVED

[Signature]

Office of Statewide Health Planning & Development FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP		ISSUE DATE: 08/15/11		OPD NO.: ST9.02
CODE: 2007 CBC		REVISION:	DATE:	
SECTION TITLE: STANDARD PARTITION WALL DETAILS				
SHEET TITLE: SUSPENDED SOFFIT CONNECTION TO CONC. SLAB, CONC. BEAM OR LWC FILLED METAL DECK				

PLOT DATE: Aug 15, 2011

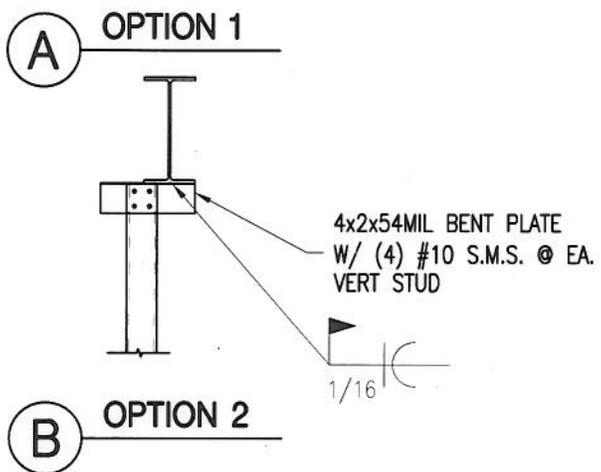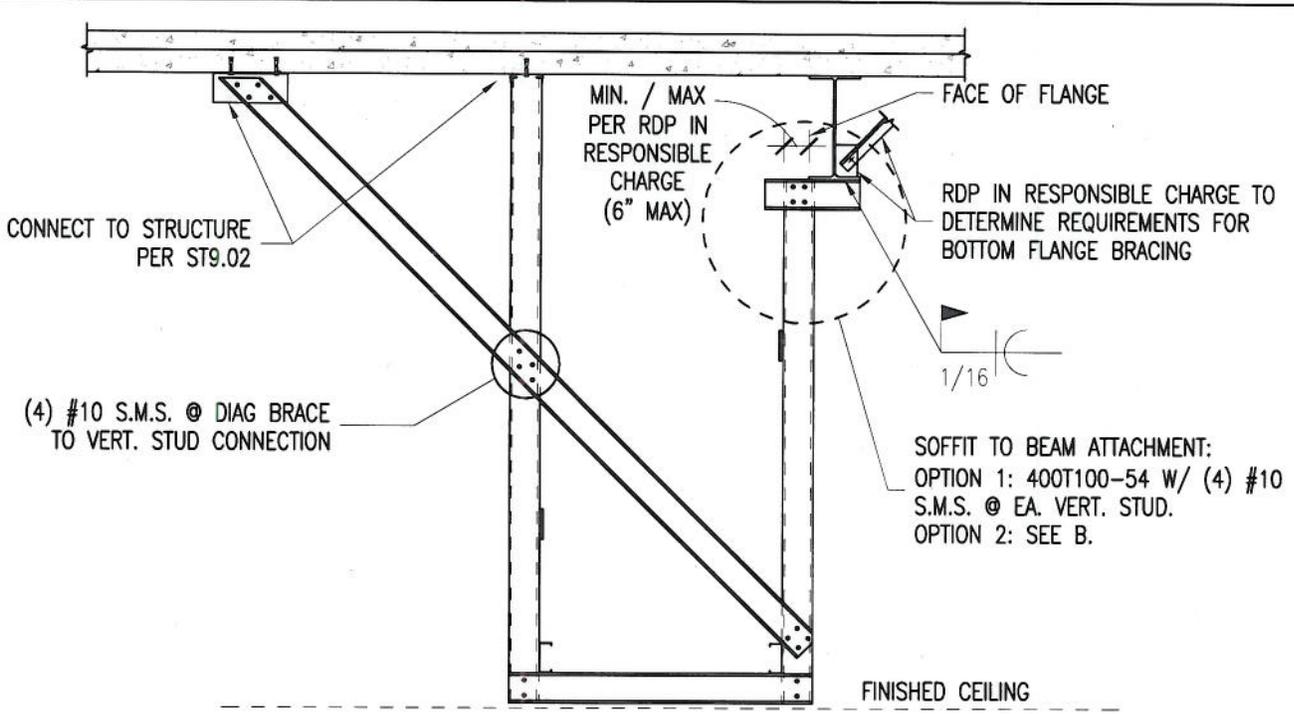

NOTES:

1. FOR REMAINDER OF SOFFIT REQUIREMENTS SEE ST9.01.
2. SEE ST1.03 & ST1.04 FOR EXPANSION ANCHOR REQUIREMENTS.
3. SEE ST1.05 FOR PAF REQUIREMENTS.
4. RDP IN RESPONSIBLE CHARGE, IOR AND CONTRACTOR TO VERIFY THAT NO WELD IS INSTALLED IN THE PROTECTED ZONE OF ANY STEEL MEMBER, SEE ANSI/AISC 341-05, SECTION 7.4.



REVIEWED IN ACCORDANCE WITH
THE REQUIREMENTS OF T24, CCR
APPROVED



Office of Statewide Health
Planning & Development
FACILITIES DEVELOPMENT DIVISION

AGENCY STAMP

CODE:

2007 CBC

SECTION TITLE:
STANDARD PARTITION WALL DETAILS

ISSUE DATE: **08/15/11**

OPD NO.:

SHEET TITLE:
**SUSPENDED SOFFIT CONNECTION TO
STEEL BEAM**

REVISION:	DATE:

ST9.03